[INCH-POUND]
A-A-52524/11
22 September 1995
SUPERSEDING
MS51915D
27 October 1986

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

SEAL, PLAIN ENCASED: ONE FELT, PLUS ONE LEATHER OR SYNTHETIC ELASTOMER SEALING MEMBER SPRING LOADED

The General Services Administration has authorized the use of this Commercial Item Description Specification Sheet (CIDSS) for all federal agencies.

The complete requirements for procuring the seals shall consist of this document and the issue in effect of A-A-52524.

1. SCOPE. This CIDSS covers seals to be used as rotary shaft seals to retain oil and other fluids.

2. SALIENT CHARACTERISTICS.

2.1 Materials. The dual sealing members shall consist of one member made of mechanical-roll extra firm pad felt and the other member conforming to one of the following classes:

2.1.1 Class 1 sealing member material. Class 1 sealing members shall be made of polymer-impregnated leather or chrome-vegetable-retanned leather which has been mildew resistant treated and suitable for normal operating temperatures (see A-A-52524).

2.1.2 Class 2 sealing member material. Class 2 sealing members shall be made of oil resistant synthetic elastomer suitable for normal operating temperature service (see A-A-52524).

2.1.3 Class 3 sealing member material. Class 3 sealing members shall be made of oil resistant elastomer suitable for extreme operating temperature service (see A-A-52524).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E, Warren, MI 48397-5000.

FSC 5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

2.2 Design and construction. The seals (classes 1, 2, and 3 of CID A-A-52524) shall be designed and constructed in accordance with figure 1.

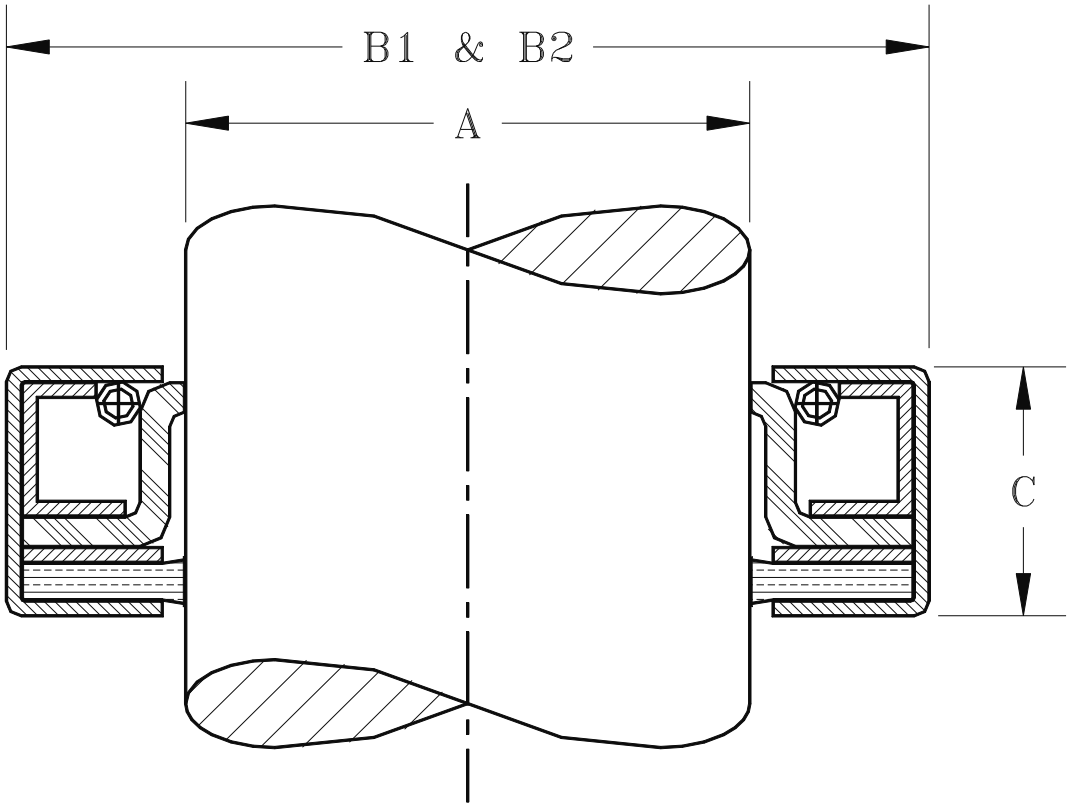

First Dash Number (Size)	A Shaft Dia (Nom)	B_1 Seal O.D. (1)	B_2 Housing Bore (Ref)	C Width ± .020
21	.63	1.129	1.125	.500
22	.94	1.832	1.828	.625
23	1.56	2.441	2.437	.781
24	1.63	2.441	2.437	.781
25	1.63	2.506	2.502	.750
26	1.75	2.627	2.623	.781
27	2.00	3.001	2.997	.750
28	2.13	2.879	2.875	.688
29	2.25	3.001	2.997	.750

First Dash Number (Size)	A Shaft Dia (Nom)	B_1 Seal O.D. (1)	B_2 Housing Bore (Ref)	C Width ± .020
30	2.38	3.358	3.353	.750
31	2.44	3.256	3.251	.750
32	2.63	3.628	3.623	.750
33	3.00	4.009	4.404	.750
34	3.00	4.254	4.249	.750
35	3.13	4.383	4.378	.813
36	3.25	4.257	4.252	.750
37	3.31	4.254	4.249	.625
38	4.00	5.003	4.998	.938

Figure 1. Seal design, construction, and part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Tolerances are ± .002 for seal outside diameters (O.D.) up to and including 2.000 inches. Tolerances are +.003, -.002 for seal O.D. over 2.000 inches and up to and including 3.000 inches. Tolerances are +.004, -.002 for seal O.D. over 3.000 inches and up to 7.000 inches.
2. Maximum housing fillet radius .030 for seals up to and including 1.63 inch O.D. and .040 for seals over 1.63 inch O.D.
3. Width tolerance for seals shall be ±.015 inch for widths up to .400 and ±.020 inch for widths over .400 inch.
4. The part number consists of the CID designator, the CID number, the specification sheet number and 2 dash numbers (see paragraph 6.3 of A-A-52524). The first dash number indicates the size. The second dash number indicates the class. EXAMPLE: A52524/11-21-3 indicates size number 21 with class 3 sealing member.
5. The PIN dash numbers and the former MS part number dash numbers are the same. EXAMPLE: A-A-52524/11-21-3 cross references to MS51915-21-3.
6. The CIDSS is not intended to limit construction to features other than as shown herein by dimensions, notation, or referenced documents.

Figure 1. Seal design, construction, and part number - Continued.

3. NOTES. (This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

3.1 Part or identification number (PIN). The PINs to be used for acquisition of seals are shown in paragraph 6.3 of A-A-52524.

3.2 Cross-reference data. Seals conforming to this CIDSS are interchangeable/substitutable with seals conforming to MS51915D.

MILITARY INTERESTS:

Custodian:
Army - AT

Review activity:
Army - AR

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

PREPARING ACTIVITY:
Army - AT

(Project 5330-0896-11)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.