[INCH-POUND]
A-A-52524/15
April 10, 1997
SUPERSEDING
MS51918E
27 October 1986

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

SEAL, PLAIN ENCASED:
SINGLE FELT SEALING MEMBER, EXTERNAL TYPE

The General Services Administration has authorized the use of this Commercial Item Description Specification Sheet (CIDSS) for all federal agencies.

The complete requirements for procuring the seals shall consist of this document and the issue in effect of A-A-52524.

1. SCOPE. This CIDSS covers seals to be used as rotary shaft seals to retain oil and other fluids.

2. SALIENT CHARACTERISTICS

2.1 Materials.

a. Sealing members: Mechanical - Roll Felt, Extra Firm Pad.
b. Case: Steel, Carbon, Sheet or Strip in Accordance with ASTM A619 or A109, CR temper 4-5.

2.2 Design and construction. The seals (classes 4 of A-A-52524) shall be designed and constructed in accordance with figure 1.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

AMSC N/A FSC 5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

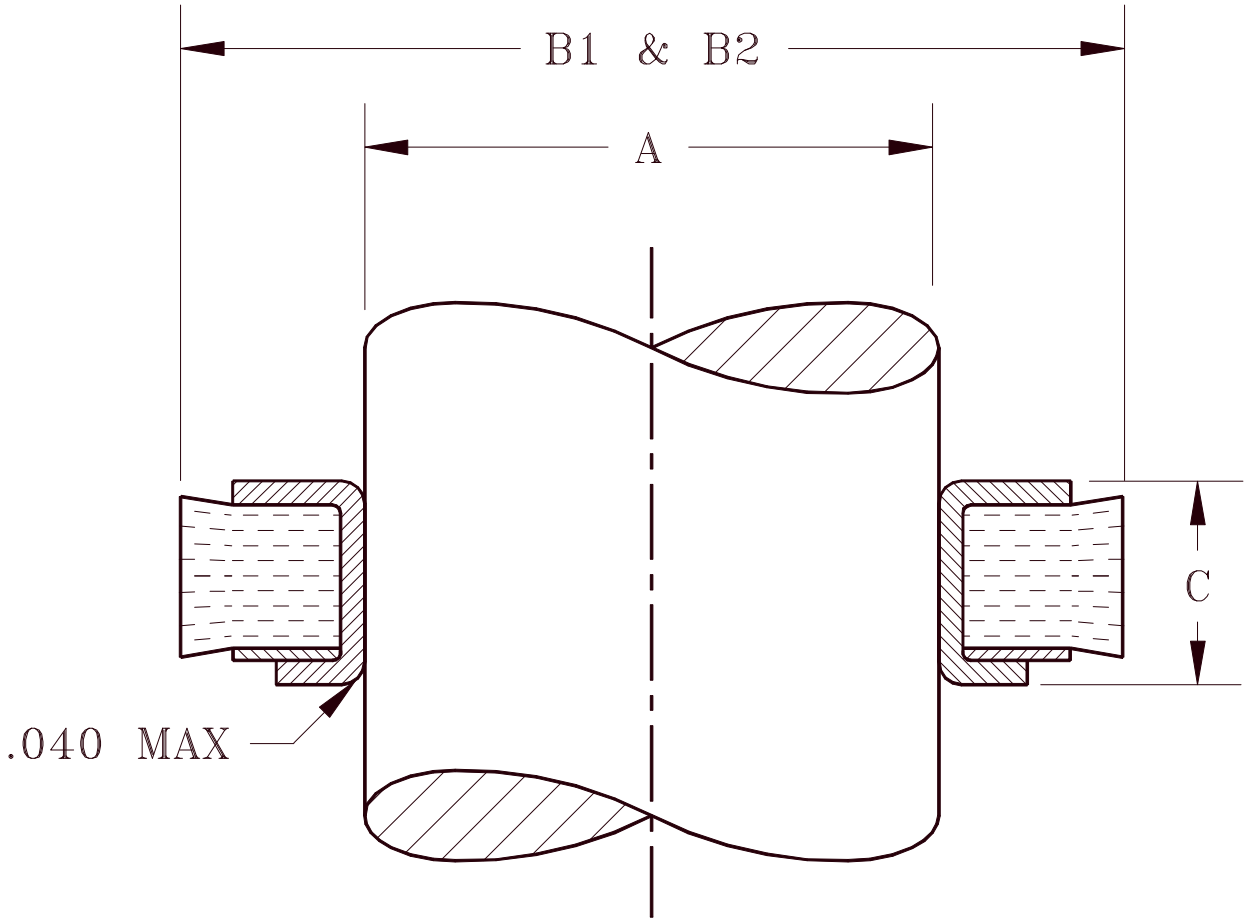

Dash No. (size)	A Seal I.D. ±0.002	B Bore +0.004 -0.002	C Width ±0.020
1	3.370	4.6875	0.5625
2	3.620	4.7813	0.5

FIGURE 1. Seal design, construction, and part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches.
2. The part number consists of the CID designator, the CID number, the specification sheet number and 2 dash numbers (see paragraph 7.3 of A-A-52524). The first dash number indicates the size. The second dash number indicates the class.
   EXAMPLE: AA52524/15-2-4 indicates size number 2 with class 4 sealing member (elastomer for extreme operating temperature).
3. The PIN dash numbers and the former MS part number dash numbers are the same.
   EXAMPLE: AA52524/15-2-4 cross references to MS51918-2-4.
4. The CIDSS is not intended to limit construction to features other than as shown herein by dimensions, notation, or referenced documents.

FIGURE 1. Seal design, construction, and part number - Continued.

3. NOTES. (This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

3.1 Addresses for obtaining copies of referenced documents.

3.1.1 Non-Government publications. ASTM A619 “Steel, Sheet, Carbon, Cold-Roll, Drawing Quality” and ASTM A109 “Steel, Strip, Carbon, Cold-Rolled” are available from the American Society for Testing and Materials, 100 Barr Harbor Drive, West Conshohocken, PA 19428-2959.

3.2 Part or Identification Number (PIN). The PINs to be used for acquisition of seals are shown in paragraph 7.3 of A-A-52524.

3.3 Cross reference data. Seals conforming to this CIDSS are interchangeable/substitutable with seals conforming to MS51918E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

A-A-52524/15

MILITARY INTERESTS:

Custodian:
Army - AT

Review Activities:
Army - AV, GL, MI, AR, AL
DLA - IS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 5330-1056)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.