INCH-POUND
A-A-52524/7A
November 6, 2003
SUPERSEDING
A-A-52524/7
September 22, 1995

COMMERCIAL ITEM DESCRIPTION SPECIFICATION SHEET

SEAL, PLAIN ENCASED: DUAL SEAL, INTERNAL SEAL SPRING LOADED

The General Services Administration has authorized the use of this Commercial Item Description Specification Sheet (CIDSS) for all federal agencies.

The complete requirements for procuring the seals shall consist of this document and the issue in effect of A-A-52524.

1. SCOPE. This CIDSS covers seals to be used as rotary shaft seals to retain oil and other fluids.

2. SALIENT CHARACTERISTICS

2.1 Materials.

2.1.1 Class 1 sealing member material. Class 1 sealing members shall be made of polymer-impregnated leather or chrome-vegetable-retanned leather which has been mildew resistant treated and suitable for normal operating temperatures (see A-A-52524).

2.1.2 Class 2 sealing member material. Class 2 sealing members shall be made of oil resistant synthetic elastomer suitable for normal operating temperature service (see A-A-52524).

2.1.3 Class 3 sealing member material. Class 3 sealing members shall be made of oil resistant elastomer suitable for extreme operating temperature service (see A-A-52524).


Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSRD-TAR-E/ASI, 6501 E. 11 Mile Road, Warren, MI 48397-5000.

ASMC N/A FSC 5330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

2.2 Design and construction. The seals (classes 1, 2, and 3 of CID A-A-52524) shall be designed and constructed in accordance with figure 1.

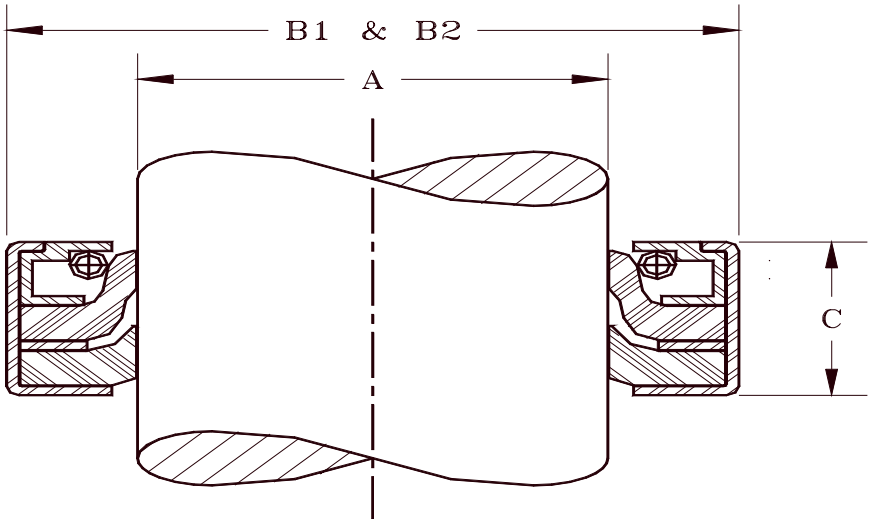

First Dash Number (Size)	A Shaft Dia (Nom)	B_1 Seal O.D. (1)	B_2 Housing Bore (Ref)	C Width +0.015 -0.020
31	0.75	1.254	1.250	0.531
32	0.81	1.379	1.375	0.531
33	1.38	2.441	2.437	0.594
34	1.50	2.129	2.125	0.563
35	1.50	2.506	2.502	0.656
36	1.75	2.504	2.500	0.625
37	1.88	2.754	2.750	0.656
38	1.88	2.879	2.875	0.656
39	1.94	3.005	3.000	0.625
40	2.25	3.355	3.350	0.594
41	2.25	3.628	3.623	0.609
42	2.38	3.355	3.350	0.703

First Dash Number (Size)	A Shaft Dia (Nom)	B_1 Seal O.D. (1)	B_2 Housing Bore (Ref)	C Width ±0.020
43	2.50	3.505	3.500	0.625
44	2.50	3.548	3.543	0.625
45	2.75	3.880	3.875	0.625
46	2.88	3.756	3.751	0.641
47	2.94	3.880	3.875	0.688
48	2.94	4.008	4.003	0.625
49	2.94	4.254	4.249	0.750
50	3.00	4.008	4.003	0.625
51	3.00	4.254	4.249	0.656
52	3.25	4.505	4.500	0.594
53	4.00	5.004	4.999	0.594
54	5.00	6.255	6.249	0.875

FIGURE 1. Seal design, construction, and part number.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Tolerances are ±.002 for seal outside diameters (O.D.) up to and including 2 inches. Tolerances are +0.003, -0.002 for seal O.D. over 2 inches and up to and including 3 inches. Tolerances are +0.004, -0.002 for seal O.D. over 3 inches and up to 7 inches.
2. The part number consists of the CID designator, the CID number, the specification sheet number and 2 dash numbers (see paragraph 6.3 of A-A-52524). The first dash number indicates the size. The second dash number indicates the class.
   EXAMPLE: A52524/7-11-3 indicates size number 11 with class 3 sealing member.
3. The PIN dash numbers and the former MS part number dash numbers are the same.
   EXAMPLE: A-A-52524/7-11-3 cross references to MS51911-11-3.
4. The CIDSS is not intended to limit construction to features other than as shown herein by dimensions, notation, or referenced documents.

FIGURE 1. Seal design, construction, and part number - Continued.

3. NOTES. (This section contains information of a general or explanatory nature that may be helpful but is not mandatory.)

3.1 Part or identification number (PIN). The PINs to be used for acquisition of seals are shown in paragraph 6.3 of A-A-52524.

3.2 Cross-reference data. Seals conforming to this CIDSS are interchangeable/substitutable with seals conforming to MS51911C.

MILITARY INTERESTS:

Custodian:
Army - AT

Review Activities:
Army - AR
DLA - IS

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 5330-1266)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:12Z
Check the source to verify that this is the current version before use.