
MILITARY SPECIFICATION SHEET

FILTERS, BAND PASS, TYPE FR6QX22YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER DATE OF THIS SPECIFICATION

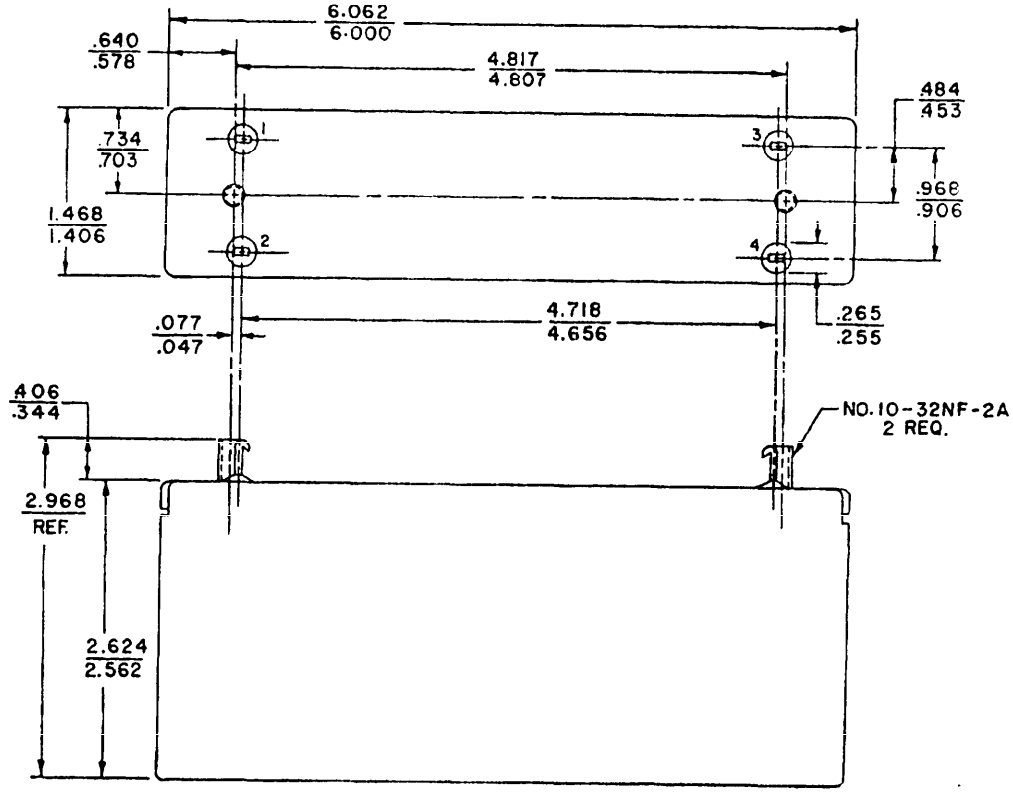

NOTES:
1. Solderable terminals for AWG No. 20 wire. Ⓑ
2. Dimensions are in inches.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Terminal identification: 1 Input
   2 Common
   3 Output
   4 Common

INCHES	MM	INCHES	MM
.047	1.19	.968	24.59
.077	1.96	1.406	35.71
.255	6.48	1.468	37.29
.265	6.73	2.562	65.07
.344	8.74	2.624	66.65
.406	10.31	2.968	75.39
.453	11.51	4.656	118.26
.484	12.29	4.718	119.84
.578	14.68	4.807	122.10
.640	16.26	4.817	122.35
.703	17.86	6.000	152.40
.734	18.64	6.062	153.97
.906	23.01		

FIGURE 1. Case and mounting dimensions.

* U.S. GOVERNMENT PRINTING OFFICE: 1981—703-023/5928

Ⓑ denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance		Reference frequency (kHz)	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB)		DC operating voltage
		Input	Output				Min	Max	
FR6QX22YY1	01	600 ohms ±5%	1275 ohms ±5%	7	8.5 ±0.5	2.0 and below	53		zero
						3.0	48		
						4.0	40		
						4.5		1.5	
						7.7		0.5	
						8.5	75		
						10.0	65		
						12.0	70		
						15.0	80		
						20.0 and above	75		
FR6QX22YY1	02	600 ohms ±5%	600 ohms ±5%	15	8.5 ±0.5	4.0 and below	50		zero
						6.0	42		
						9.0	45		
						12.0	38		
						12.5		1.5	
						15.0		0.3	
						16.5	55		
						18.0	75		
						20.0	58		
						30.0 and above	60		
FR6QX22YY1	03	600 ohms ±5%	600 ohms ±5%	11	8.8 ±0.5	5 and below	60		zero
						6	50		
						8	40		
						8.5		1.5	
						11.7		0.5	
						12.5	60		
						14.0	62		
						20.0	80		
						25.0 and above	80		
FR6QX22YY1	04	600 ohms ±5%	600 ohms ±5%	19	9.2 ±1	6 and below	55		zero
						8	50		
						10	50		
						13	40		
						16	38		
						16.5		1.5	
						19.7		0.5	
						20.5	55		
						22.0	65		
						25	52		
						30 and above	55		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable.

Terminal strength: Method 211, MIL-STD-202.

Test condition A - Pull test.

Test condition D - Twist test.

Test condition E - Torque test.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202. Test potential 500 Vrms between terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

4 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

4 hours at +85°C. Electrical measurements in accordance with table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.

Signal input level - 1 mA.

DC voltage potential - Zero.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. 10-2,000 Hz. Electrical load not applicable.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202. 100G, 6 milliseconds.

Thermal shock: Method 107, test condition A, MIL-STD-202.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Part number: M18327/013 -(dash number from table I).

Ⓑ Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Groups A and B tests of MIL-F-18327 shall be applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-18327/13B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 202640-18T11:19Z
Check the source to verify that this is the current version before use.