
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR6QX22YY2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER DATE OF THIS SPECIFICATION

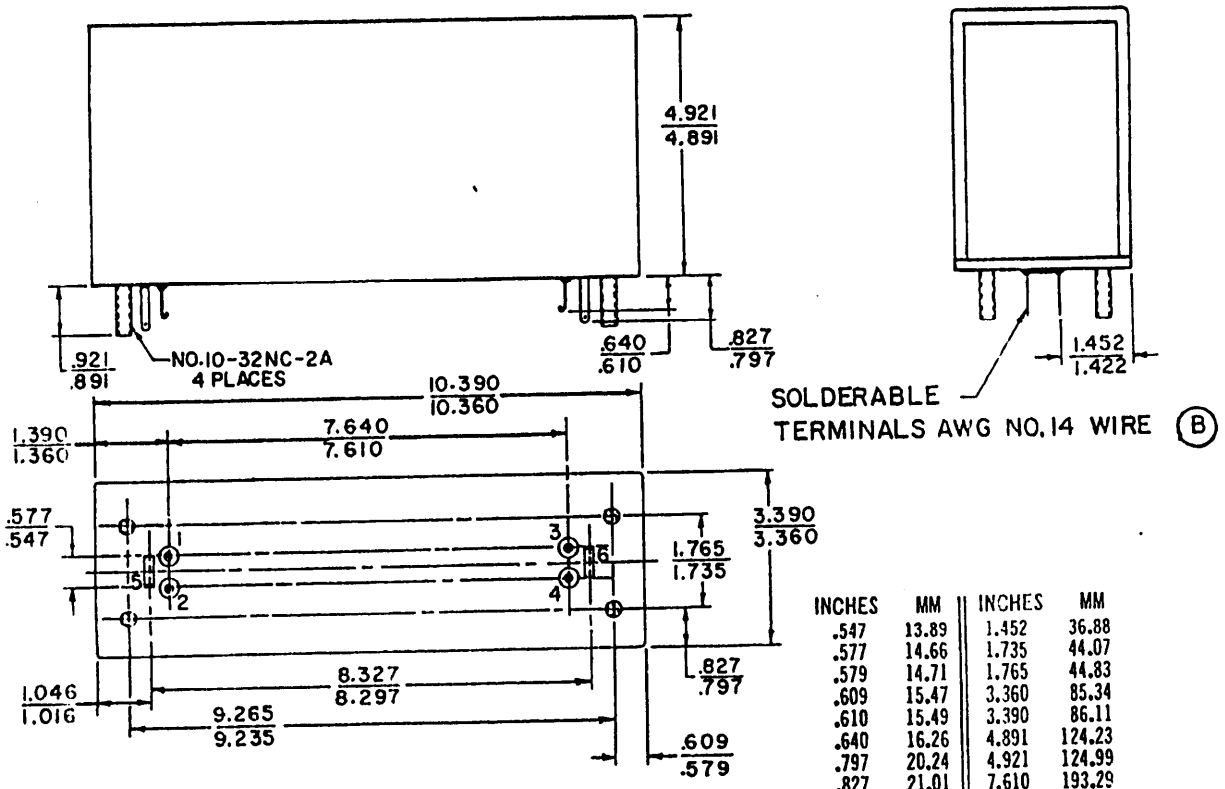

INCHES	MM	INCHES	MM
.547	13.89	1.452	36.88
.577	14.66	1.735	44.07
.579	14.71	1.765	44.83
.609	15.47	3.360	85.34
.610	15.49	3.390	86.11
.640	16.26	4.891	124.23
.797	20.24	4.921	124.99
.827	21.01	7.610	193.29
.891	22.63	7.640	194.06
.921	23.39	8.297	210.74
1.016	25.81	8.327	211.51
1.046	26.57	9.235	234.57
1.360	34.54	9.265	235.33
1.390	35.31	10.360	263.14
1.422	36.12	10.390	263.91

NOTES:
1. Crystal type filter.
2. Dimensions are in inches.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Terminal identification: 1-2 Input
   3-4 Output
   5-6 Ground

FIGURE 1. Case and mounting dimensions.

Ⓑ denotes changes

FSC 5915

★U.S. GOVERNMENT PRINTING OFFICE: 1981/703-023/7969
Provided by IHS Markit under license with DLA -- Not for Resale
No reproduction or networking permitted without license from IHS
Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable.

Terminal strength: Method 211, MIL-STD-202.

Test condition A - Pull test:

Terminals 1 thru 6.

Test condition B - Bend test.

Terminals 5 and 6.

Test condition D - Twist test:

Terminals 1 thru 4.

Test condition E - Torque test:

Terminals 1 thru 6.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202. Test potential 500 Vrms between terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

4 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

4 hours at +85°C. Electrical measurements to be made in accordance with table I.

Electrical characteristics: See table I.

TABLE I. Electrical characteristics.

Impedance (ohms)		Reference frequency (kHz) 1/	Insertion loss (dB)	Frequency range (kHz)	Discrimination (dB)		DC operating voltage
Input	Output				Min	Max	
1,560	1,560	100.125-106.0	6 max	95	69		100V
				98	64		
				99	69		
				99.6	74		
				99.7	62		
				99.8	59		
				100.125-106.0	0	1	
				109.0	24		
				111.0	54		

1/ Reference frequency shall be the point of minimum measured insertion loss over the range of 100.125 to 106.0 kHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Life: Method 108, test condition F, MIL-STD-202. Test potential 100 Vdc.

Signal input level - 1 volt.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. 10-2,000 Hz. Electrical load not applicable.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202. 100G, 6 milliseconds.

Thermal shock: Method 107, test condition A, MIL-STD-202.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Type designation: FR6QX22YY2.

Part number: M18327/016-001.

(B) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B tests of MIL-F-18327 shall be applicable.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-18327/16B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.