
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR4QX22YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER THE DATE OF THIS SPECIFICATION

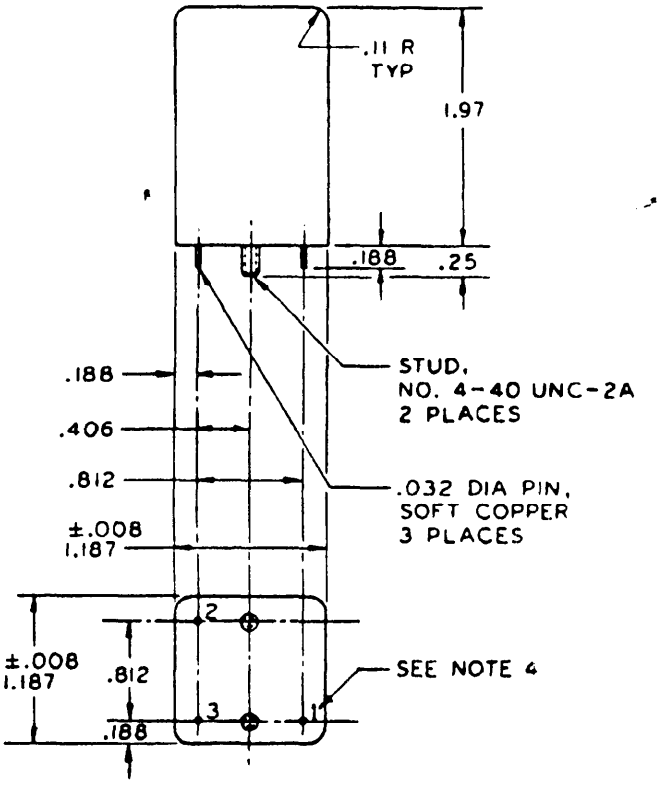

INCHES	MM
.005	.13
.008	.20
.02	.5
.032	.81
.11	2.8
.188	4.78
.25	6.4
.406	10.31
.812	20.62
1.187	30.15
1.97	50.0

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.02 on two place decimals and ±.005 on three place decimals.
4. Terminal identification: Input - 1; Output - 2, Common - 3.

FIGURE 1. Case and mounting dimensions.

* U.S. GOVERNMENT PRINTING OFFICE 1981 - 703-023-59130

Ⓑ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable pin.

Terminal strength: Method 211, MIL-STD-202.

Test condition A - Pull test.

Test condition E - Torque test.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202.
100 Vrms from each pin to case for not more than 1 minute each.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

1 hour at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

1 hour at +85°C. Electrical measurements to be performed in accordance with table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202. Test potential 50 Vdc.

Signal input voltage 95 mVrms at reference frequency or 15 microwatts.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (kHz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage
		Input	Output				Min	Max	
FR4QX22YY1	001	600 ±20%	600 ±20%	1	0.5 max	150 300 3500 5000	30 14	 5.5 8 	50 max

Temperature rise: Not applicable.

Vibration: Method 201, MIL-STD-202. 10-55 Hz motion shall be applied for a period of 2 hours in each of 3 mutually perpendicular directions for a total of 6 hours. Electrical load not applicable.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that step 3 shall be 85°C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in a saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Part number: M18327/017-001.

(B) Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B tests of MIL-F-18327 shall be applicable.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-17)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-F-18327/17B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026l0-18T11:19Z
Check the source to verify that this is the currentversion before use.

OLD

EPARTMENT OF THE NAVY

OFFICIAL BUSINESS
ENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12[illegible]03 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360

OLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.