
MILITARY SPECIFICATION SHEET


FILTER, LOW PASS, TYPES FR6RX11AG1 AND FR6RX11AF1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-18327.

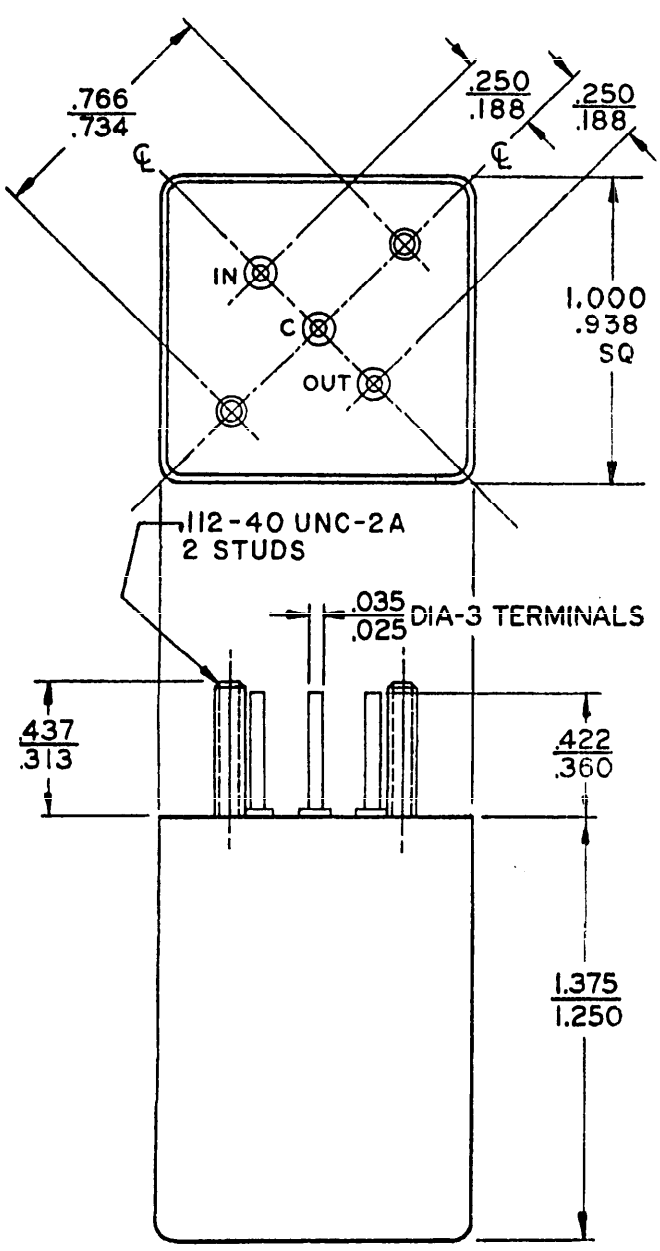

Dash No. 01 to 09 Wt 2 1/4 oz.

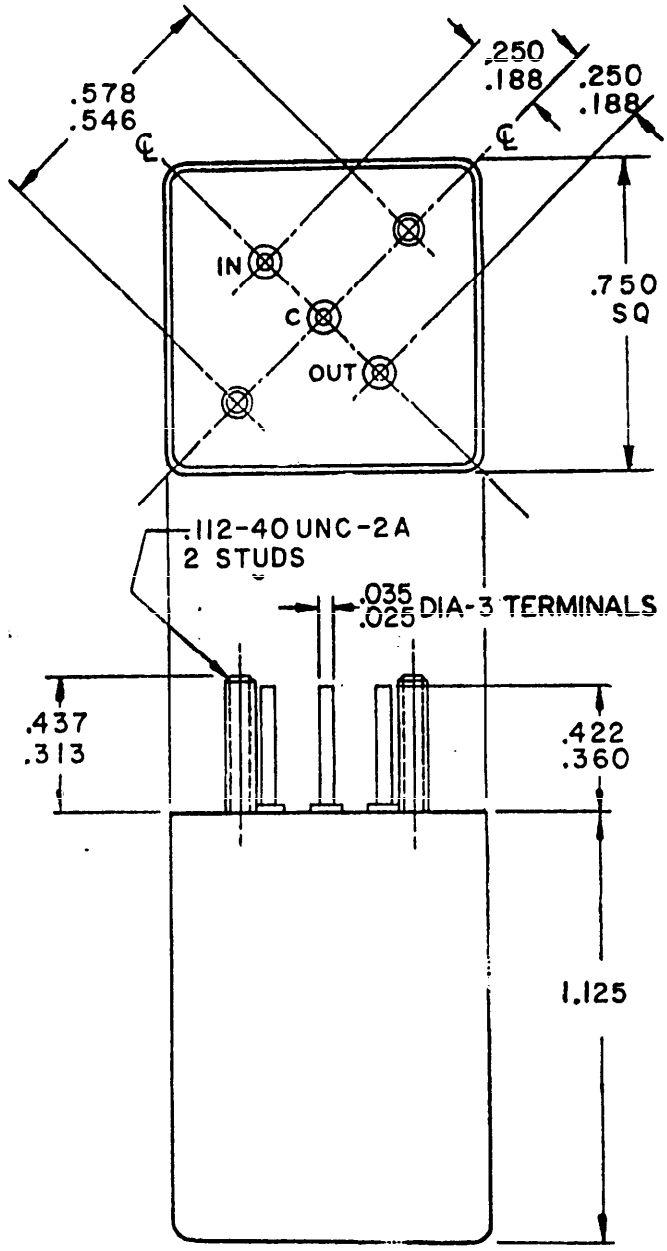

Dash No. 10 to 13 Wt 1 oz.

FIGURE 1. Case and mounting dimensions.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM
.025	.64	.578	14.68
.035	.89	.734	18.64
.188	4.78	.750	19.05
.250	6.35	.766	19.46
.313	7.95	.938	23.83
.360	9.14	1.000	25.40
.422	10.72	1.125	28.58
.437	11.10	1.250	31.75
.546	13.87	1.375	34.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Terminal identification:
   IN - C Input
   OUT - C Output

FIGURE 1. Case and mounting dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable pin (see figure 1).

Weight: 2 1/4 ounces for dash numbers 01 through 09; 1 ounce for dash numbers 10 through 13.

Terminal strength: Method 211, MIL-STD-202, test condition A - (pull) force - 2 pounds.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202. Test potential 500 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

1 hour at -55°C +0°C, -3°C.

1 hour at 105°C. Electrical measurements shall be performed in accordance with table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202. Signal input level 1 volt.

DC operating voltage: Zero.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 1,000 megohms between each terminal and case.

Electrical characteristics: As specified herein.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. 10-2,000 Hz. Electrical load not applicable.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that step 3 shall be at 105°C.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Part number: M18327/018 -(dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency Hz	Insertion loss (dB) (max)	Frequency (Hz)	Discrimination (dB)	
		Source	Load				Min	Max
FR6RX11AG1	001	10k	10k	50	3	10 to 200		3
						265		8
						397	30	
						530	40	
FR6RX11AG1	002	10k	10k	40	2	200		6
						300	30	
						400	40	
FR6RX11AG1	003	10k	10k	60	2	300		6
						450	30	
						600	40	
FR6RX11AG1	004	10k	10k	100	2	500		6
						750	30	
						1,000	40	
FR6RX11AG1	005	10k	10k	200	2	1,000		6
						1,500	30	
						2,000	40	
FR6RX11AG1	006	10k	10k	300	2	1,500		6
						2,250	30	
						3,000	40	
FR6RX11AG1	007	10k	10k	400	2	2,000		6
						3,000	30	
						4,000	40	
FR6RX11AG1	008	10k	10k	600	2	3,000		6
						4,500	30	
						6,000	40	
FR6RX11AG1	009	10k	10k	1,000	2	5,000		6
						7,500	30	
						10,000	40	
FR6RX11AF1	010	10k	10k	1,200	2	6,000		6
						9,000	30	
						12,000	40	
FR6RX11AF1	011	10k	10k	1,600	2	8,000		6
						12,000	30	
						16,000	40	
FR6RX11AF1	012	10k	10k	2,000	2	10,000		6
						15,000	30	
						20,000	40	
FR6RX11AF1	013	10k	10k	3,000	2	15,000		6
						22,500	30	
						30,000	40	

Source: https://assist.dla.mil -- Downloaded: 202640-18T11:19Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS

Qualification of filters based on similarity to qualified filters: Qualification by similarity may be granted to all parts covered in this specification based on the qualification of one part number. Qualification by similarity shall be restricted to those parts which meet the criteria for a similar filter as specified in MIL-F-18327. The contractor shall provide certification that any parts qualified on the basis of similarity meet the full requirements of this specification and MIL-F-18327.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0242-1)

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:19Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

2374/402B dated 8 Jul 81 has been reviewed and determined to be

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-F-18327/18B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command
Defense Standardization Program Branch
Department Of The Navy
Washington, D.C. 20360
Attn: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.