
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR6RX22AF1

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

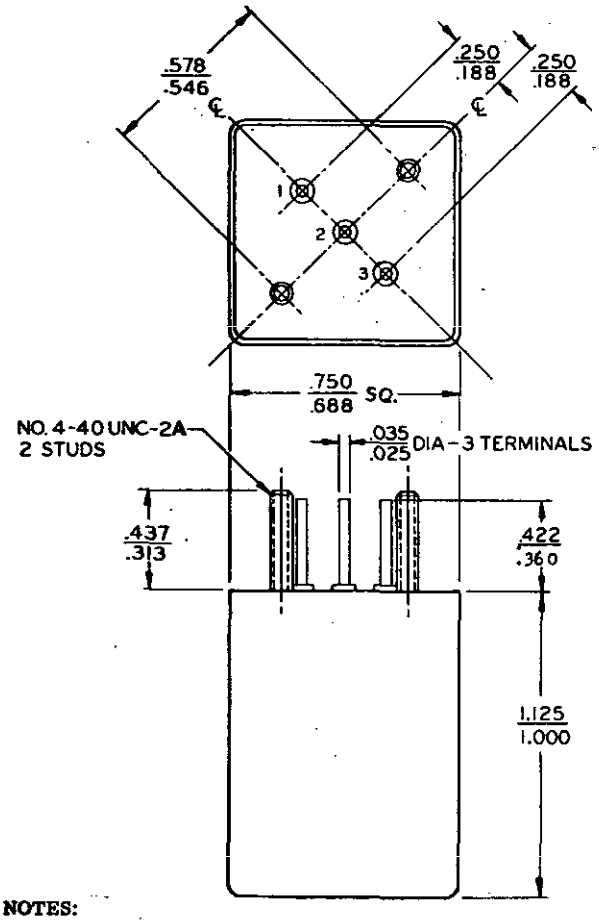

INCHES	MM
.025	.64
.035	.89
.188	4.76
.250	6.35
.313	7.95
.360	9.14
.422	10.72
.437	11.10
.546	13.87
.578	14.68
.688	17.48
.750	19.05
1.000	25.40
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Terminal identification: 1 - 2 Input
   3 - 2 Output

Case and mounting dimensions.

(A) denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Metal.

Terminals: Pin.

Terminal strength: Method 211, test condition A, MIL-STD-202.

Ⓐ Dielectric withstanding voltage: Method 301, MIL-STD-202. Test potential 500 vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between eacn terminal and case.

Stability at temperature extremes:

1 hour at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

1 hour at 105° C. Electrical measurements shall be performed in accordance with table.

Electrical characteristics: See table.

Life: Method 108, test condition F, MIL-STD-202. Signal input level 2 volts. DC operating voltage: Zero.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. 10-2,000 Hz. Electrical load not applicable.

Ⓐ Shock (specified pulse): Method 213, test condition I, MIL-STD-202. 100G, 6 milliseconds.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that step 3 shall be at +105° C.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in a saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Part number: Consists of the basic number of this specification sheet and a dash number. Example:

M18327/019-001

Basic document number

Dash number from table

Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (kHz)	Insertion loss (dB)	Frequency (kHz)	Discrimination (dB)	
		Source	Load				Min	Max
FR6RX22AF1	001	500	500	40	3 max	20 38 thru 42 80	35 35	4

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU, MI
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent
DSA - ES

(Project 5915-0120-6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)*

CITY AND STATE

CONTRACT NO.

QUANTITY OF ITEMS PROCURED

DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)*

DATE

DD FORM 1 APR 63 1426

REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:19Z
Check the source to verify that this is the current version before use.