
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR4RX22GB1

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

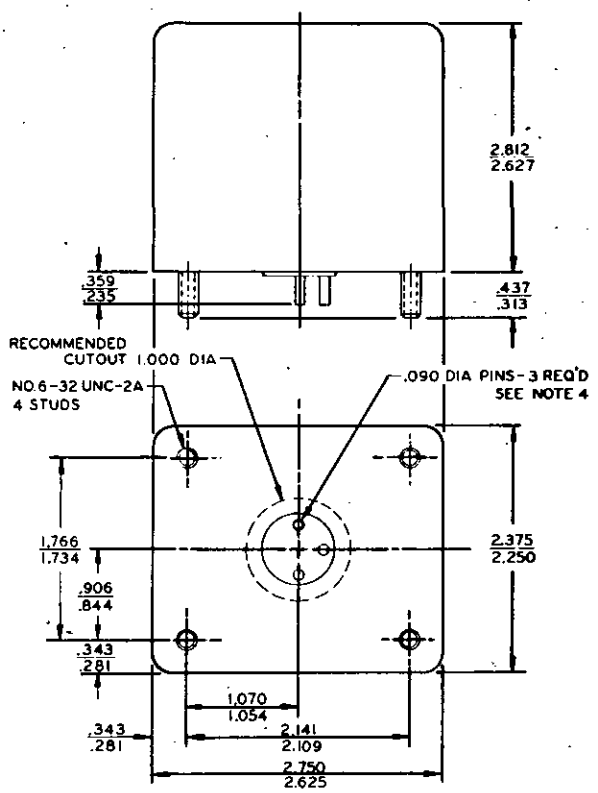

INCHES	MM
.005	.13
.090	2.29
.235	5.97
.281	7.14
.313	7.95
.343	8.71
.359	9.12
.437	11.10
.844	21.44
.906	23.01
1.000	25.40
1.054	26.77
1.070	27.18
1.734	44.04
1.766	44.86
2.109	53.57
2.141	54.38
2.250	57.15
2.375	60.33
2.625	66.68
2.627	66.73
2.750	69.85
2.812	71.43

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is .xxx±.005.
4. Pins shall be numbered in an ascending clockwise numerical order. The colored bead indicates Pin No. 1.
5. Terminal identification: IN – 1
   COMMON – 2
   OUT – 3

Case and mounting dimensions.

Ⓐ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Metal.

Terminals: Solder lug.

Terminal strength: Method 211, MIL-STD-202.
Test condition A - Pull test.
Test condition E - Torque test.

Ⓐ Dielectric withstanding voltage:
Method 301, MIL-STD-202. Test potential 750 vrms between terminal and case.
Method 105, test condition B, MIL-STD-202. Test potential 675 vrms between each terminal and case at reduced pressure.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

4 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

4 hours at +105° C. Electrical measurements in accordance with table.

Electrical characteristics: See table.

Life: Method 108, test condition F, MIL-STD-202. Signal input level 2 vrms. DC operating voltage: Zero.

Temperature rise: Not applicable.

Vibration: Method 201, MIL-STD-202. 10-55 Hz. Motion shall be applied for 2 hours in each of 3 mutually perpendicular directions for a total of 6 hours. Electrical load not applicable.


Ⓐ Shock (specified pulse): Method 213, test condition I, MIL-STD-202. 100G, 6 milliseconds.

Thermal shock: Method 107, test condition A, MIL-STD-202.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.

Moisture resistance: Method 106, MIL-STD-202.

Part number: Consists of the basic number of this specification sheet and a dash number. Example:

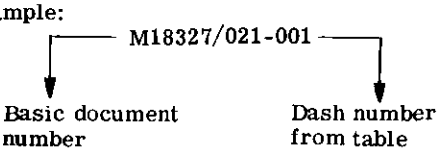

Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)	
		Source	Load				Min	Max
FR4RX22GB1	001	Zero	10K	2,000	3 max	1,000 1,820 2,200 4,000	66 66	 3 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - EL, MU, MI
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5915-0120-7)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.