
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR6RX22YY1

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

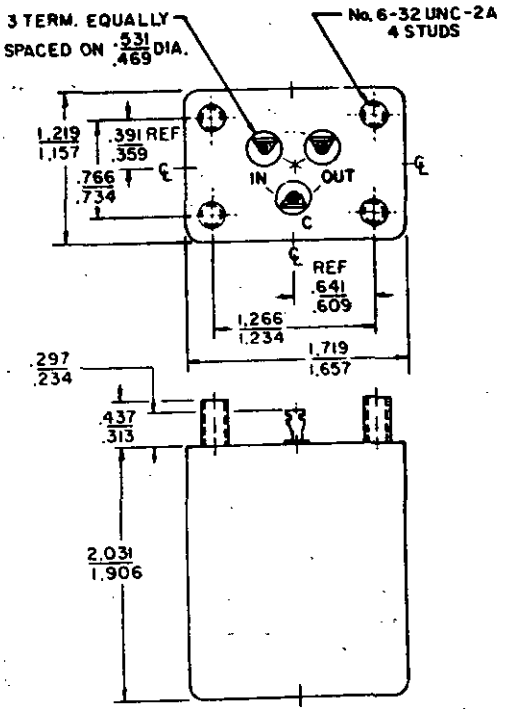

INCHES	MM
.234	5.94
.297	7.54
.313	7.95
.359	9.12
.391	9.93
.437	11.10
.469	11.91
.531	13.49
.609	15.47
.641	16.28
.734	18.64
.766	19.46
1.157	29.39
1.219	30.96
1.234	31.34
1.266	32.16
1.657	42.09
1.719	43.66
1.906	48.41
2.031	51.59

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Terminal identification:
   IN - C Input
   OUT - C Output

Case and mounting dimensions.

(A) denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Metal.

Terminals: Solder lug.

Weight: 8 ounces.

Terminal strength: Method 211, MIL-STD-202.
Test conditions A and E.
Test condition A (Pull), force - - - 2 pounds.
Test condition E (Torque)- - - 8 ounce-inches.

Ⓐ Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202. 500 vrms between each terminal and case.
At reduced pressure: Method 301, MIL-STD-202, and method 105, test condition B, MIL-STD-202. 450 vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

2 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

2 hours at $105^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C.

Electrical characteristics shall be as specified in table.

Electrical characteristics: See table.

Life: Method 108, test condition F, MIL-STD-202.
Test temperature $105^{\circ}\ ^{+10^{\circ}}_{-5^{\circ}}$ C.
Signal input level - 2 volts to source resistor.
DC operating voltage - Zero.
Measurements at 25° C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.
Electrical characteristics - As specified in table.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202.
Electrical load not applicable.
Measurements at 25° C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table.

Ⓐ Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25° C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that step 3 shall be 105° C.
Exposure time - 1 hour.
Measurements at 25° C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.
Measurements at 25° C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Measurements at 25° C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Part number: Consists of the basic number of this specification sheet and a dash number.
Example:

M18327/023-001

Basic document number — Dash number from table

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:20Z
Check the source to verify that this is the current version before use.

Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion gain (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR6RX22YY1	001	10K	20 Meg-ohms	40	3 min	20 38.8 41.2 80	30 30	 4 4 	0

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU, MI
Navy - EC, AS, OS
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5915-0120-8)

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:20Z
Check the source to verify that this is the current version before use.