
MILITARY SPECIFICATION SHEET

FILTER, HIGH PASS, TYPE FR6RX33AG1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-18327.

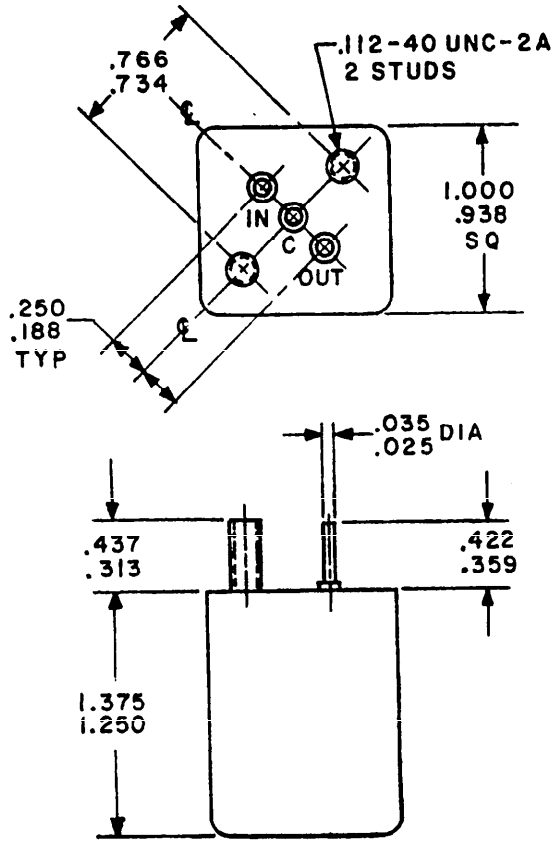

INCHES	MM
.025	.64
.035	.89
.188	4.78
.250	6.35
.313	7.95
.359	9.12
.422	10.72
.437	11.10
.734	18.64
.766	19.46
.938	23.83
1.000	25.40
1.250	31.75
1.375	34.93

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Terminal identification: IN-C input
   OUT-C Output

FIGURE 1. Case and mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

FSC 5915

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable pin (see figure 1).

Weight: 1.5 ounces.

Terminal strength: Method 211, MIL-STD-202, test condition A - (Pull) force - 2 pounds.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage:

At atmospheric pressure: Method 301, MIL-STD-202. 500 Vrms between each terminal and case.

At reduced pressure: Method 301, MIL-STD-202, and method 105, test condition B, MIL-STD-202. 450 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

1 hour at -55°C +0°C, -3°C.

1 hour at +105°C +3°C, -0°C.

Electrical characteristics shall be as specified in table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature: 105°C +10°C, -5°C.

Signal input level: 1 volt to source resistor.

DC operating voltage: Zero.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 1,000 megohms between each terminal and case.

Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration: Method 204, test condition B, MIL-STD-202. Electrical load not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Electrical characteristics: As specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency Hz	Insertion loss (dB) (max)	Frequency (Hz)	Discrimination (dB)	
		Source	Load				Min	Max
FR6RX33AG1	01	10k	10k	3,000	2	5,000 620 415 310 and lower	 30 40	2 9
FR6RX33AG1	02	10k	10k	2,500	2	500 333 250	 30 40	6
FR6RX33AG1	03	10k	10k	5,000	2	1,000 667 500	 30 40	6
FR6RX33AG1	04	10k	10k	7,500	2	1,500 1,005 750	 30 40	6
FR6RX33AG1	05	10k	10k	20,000	2	4,000 2,680 2,000	 30 40	6

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Electrical characteristics: As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except step 3 shall be 105°C.

Exposure time: 1 hour.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 10,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 10,000 megohms between each terminal and case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 10,000 megohms between each terminal and case.

Part number: M18327/025 -(dash number from table I).

QUALITY ASSURANCE PROVISIONS

Qualification of filters based on similarity to qualified filters: Qualification by similarity may be granted to all parts covered in this specification based on the qualification of one part number. Qualification by similarity shall be restricted to those parts which meet the criteria for a similar filter as specified in MIL-F-18327. The contractor shall provide certification that any parts qualified on the basis of similarity meet the full requirements of this specification and MIL-F-18327.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0242-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.