
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR4RX22YY2

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

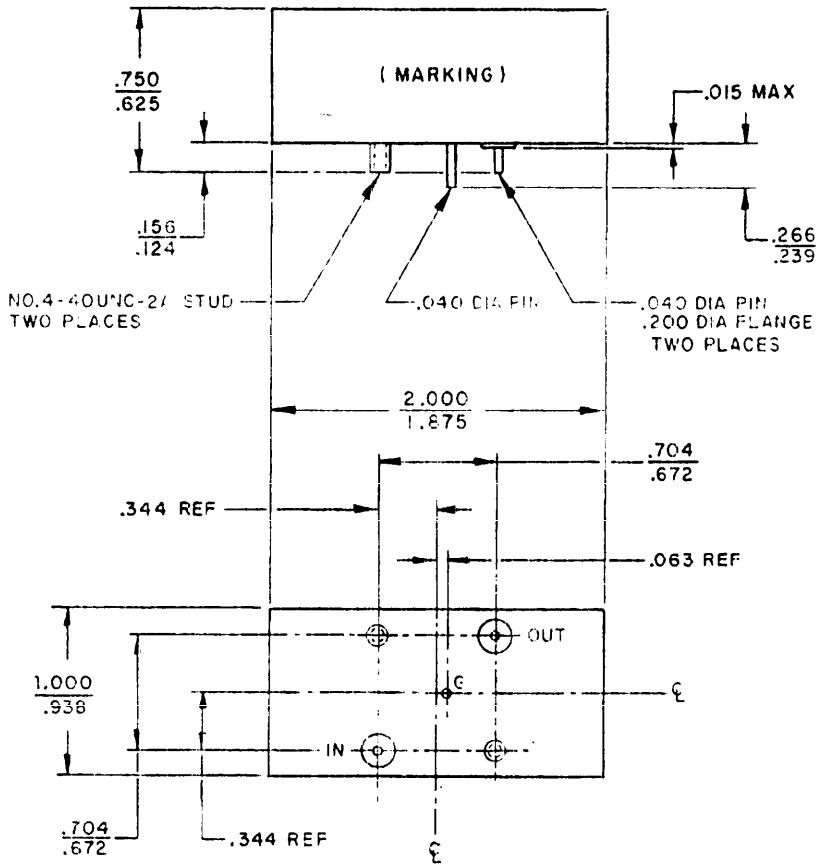

INCHES	MM
.015	.38
.040	1.02
.063	1.60
.124	3.15
.156	3.96
.200	5.08
.239	6.07
.266	6.76
.344	8.74
.625	15.88
.672	17.07
.704	17.88
.750	19.05
.938	23.83
1.000	25.40
1.875	47.63
2.000	50.80

NOTES:
1. Crystal filter.
2. Dimensions are in inches.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Terminal identification: Input – In
   Output – Out
   Ground – G
5. Unless otherwise specified, tolerance is ±.016 (.41 mm).

Case and mounting dimensions.

(A) denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Metal.

Terminals: Pin.

Weight: 4.0 ounces.

Terminal strength: Method 211, MIL-STD-202.
Test condition A - (Pull) --- 2 pounds.

Ⓐ Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202. 500 vrms between each terminal and case.
At reduced pressure: Method 301, MIL-STD-202, and Method 105, test condition B, MIL-STD-202. 450 vrms between each terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:
1 hour at $-55^{\circ}\ {}^{+0^{\circ}}_{-3^{\circ}}$ C.
1 hour at $105^{\circ}\ {}^{+3^{\circ}}_{-0^{\circ}}$ C.
Electrical characteristics: As specified in table.

Electrical characteristics: See table.

Life: Method 108, test condition F, MIL-STD-202.
Test temperature $105^{\circ}\ {}^{+10^{\circ}}_{-5^{\circ}}$ C.
Signal input level - 2.5 vrms at reference frequency.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.
Electrical characteristics - As specified in table.

Temperature rise: Not applicable.

Vibration: Method 201, MIL-STD-202.
Electrical load not applicable.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table.

Ⓐ Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table.


Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 105°C.
Exposure time - 1/2 hour.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Part number: Consists of the basic number of this specification sheet and a dash number.

Example:

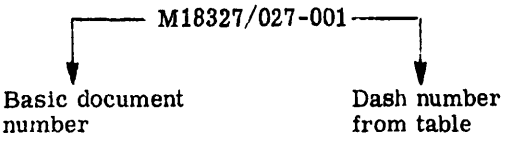

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.

Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (MHz)	Insertion loss (dB)	Frequency range (MHz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR4RX22YY2	001	2K	2K	18.6	3	18.545 18.578 18.622 18.655	60 60	 6 6 	Zero

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU, MI
Navy - AS, OS, EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5915-0120-20)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:20Z
Check the source to verify that this is the current version before use.