
# MILITARY SPECIFICATION SHEET

## FILTER, BAND PASS, TYPE FR4QX22YY1

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

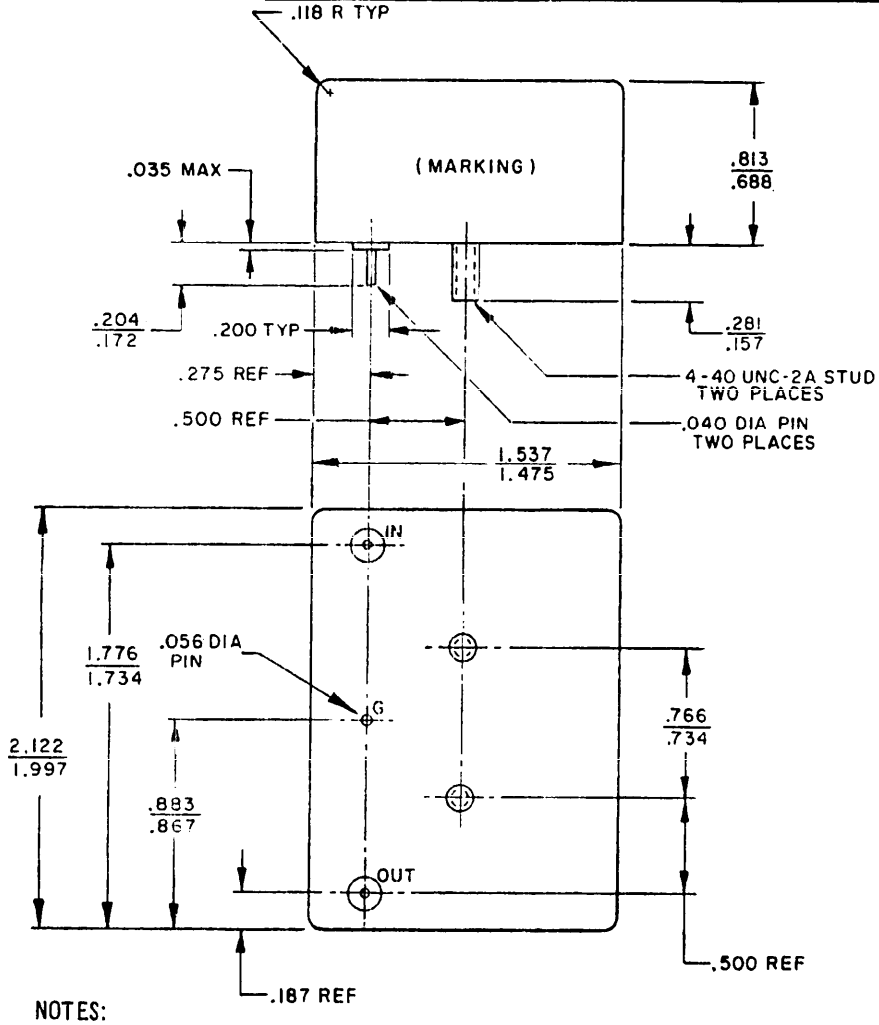


| INCHES | MM |
|---|---|
| .035 | .89 |
| .040 | 1.02 |
| .056 | 1.42 |
| .118 | 3.00 |
| .157 | 3.99 |
| .172 | 4.37 |
| .187 | 4.75 |
| .200 | 5.08 |
| .204 | 5.18 |
| .275 | 6.99 |
| .281 | 7.14 |
| .500 | 12.70 |
| .688 | 17.48 |
| .734 | 18.64 |
| .766 | 19.46 |
| .813 | 20.65 |
| .867 | 22.02 |
| .883 | 22.43 |
| 1.475 | 37.47 |
| 1.537 | 39.04 |
| 1.734 | 44.04 |
| 1.776 | 45.11 |
| 1.997 | 50.72 |
| 2.122 | 53.90 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Terminal identification: Input – In
   Output – Out
   Ground – G
4. Unless otherwise specified, tolerance is ±.005 (.13 mm).

Case and mounting dimensions.

Ⓐ denotes changes



FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure.

Case: Metal.

Terminals: Pin.

Weight: 2.68 ounces.

Terminal strength: Method 211, MIL-STD-202.
Test condition A - (Pull) --- 2 pounds.

Ⓐ Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202. 100 vrms between each terminal and case.
At reduced pressure: Method 301, MIL-STD-202, and Method 105, test condition B, MIL-STD-202. 90 vrms between each terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:
1 hour at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.
1 hour at $85^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C.
Electrical characteristics: As specified in table.

Electrical characteristics: See table.

Life: Method 108, test condition F, MIL-STD-202.
Test temperature $85^{\circ}\ ^{+10^{\circ}}_{-5^{\circ}}$ C.
Signal input level - 2.5 vrms at reference frequency.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.
Electrical characteristics - As specified in table.

Temperature rise: Not applicable.

Vibration: Method 201, MIL-STD-202.
Electrical load not applicable.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table.

Ⓐ Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table.


Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 85°C.
Exposure time - 1/2 hour.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Immersed for 15 minutes in saturated solution of sodium chloride and water.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Part number: Consists of the basic number of this specification sheet and a dash number.

Example:

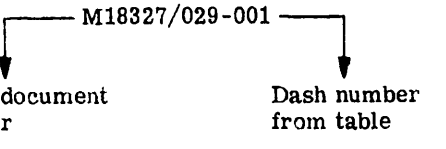




Source: https://assist.dla.mil -- Downloaded: 202610-18T11:21Z
Check the source to verify that this is the currentversion before use.

Electrical characteristics.

| Type designation | Dash number | Impedance (ohms) | | Reference frequency (MHz) | Insertion loss (dB) | Frequency range (MHz) | Discrimination (dB) | | DC operating voltage (volts) |
|---|---|---|---|---|---|---|---|---|---|
| | | Source | Load | | | | Min | Max | |
| FR4QX22YY1 | 001 | 550 min | 550 min | 53.0 | 16 | 51.00<br>52.05<br>54.30<br>56.00 | 26<br><br><br>26 | <br>6<br>6<br> | Zero |

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU, MI
Navy - AS, OS, EC
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5915-0120-22)



Source: https://assist.dla.mil -- Downloaded: 202610-18T11:21Z
Check the source to verify that this is the current version before use.