
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR4QX22YY1

This amendment forms a part of Military Specification Sheet MIL-F-18327/29A, dated 19 June 1970, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1: Delete and substitute the following new figure.

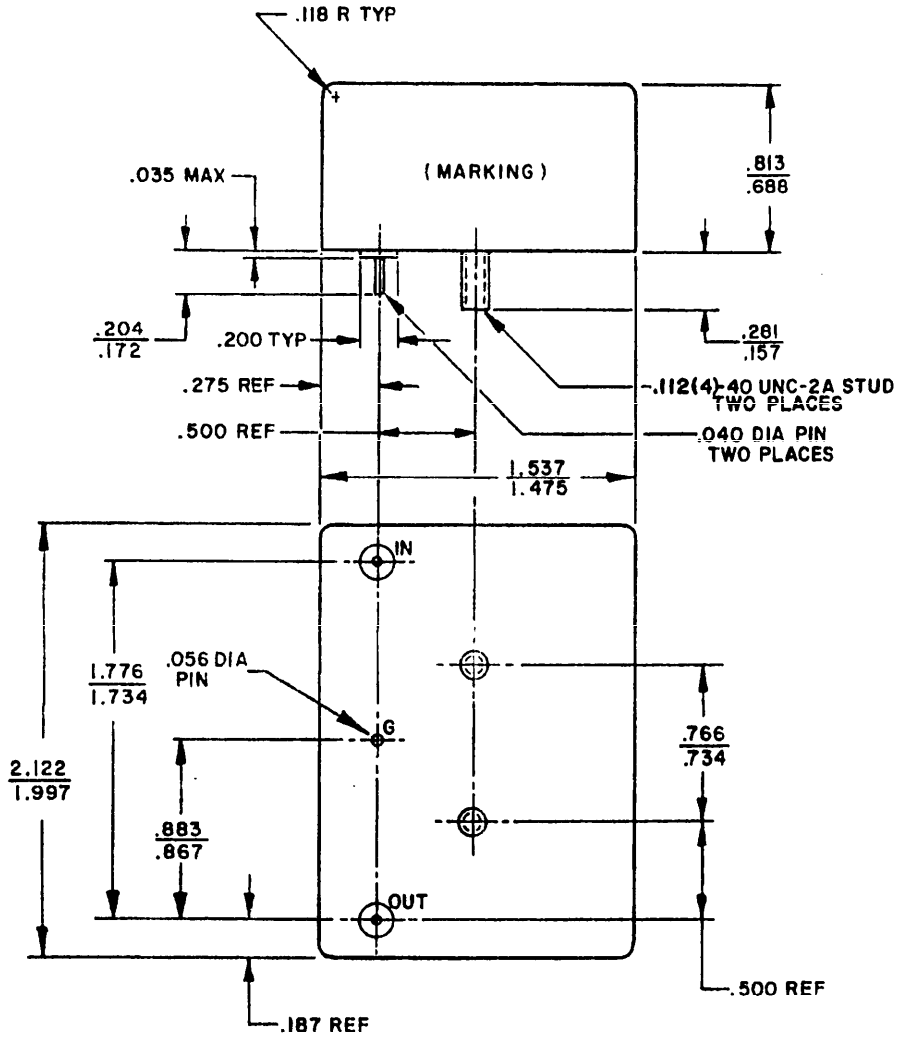

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

* Requirements, Terminals: Delete "pin." and substitute "Solderable pin (see figure)."

* Requirements: After "Terminal strength", add the following:

" Solderability: Method 208 MIL-STD-202.
All terminations, of each filter, to be tested.
Solder dip dwell time: 5 seconds +1/2 second.
Examination of terminations: At 10X magnification."

NOTE: The margins of this amendment are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous amendment were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous amendment.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV, ME, WC
Navy - AS, CG, MC, SH
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0190-22)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.