
MILITARY SPECIFICATION SHEET

FILTERS, LOW PASS, TYPE FR6RX11YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

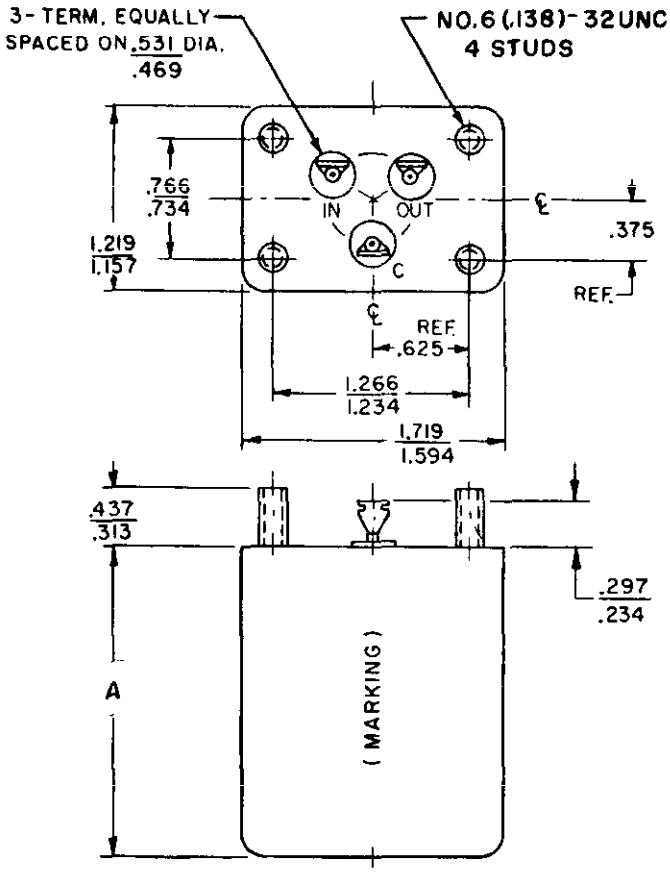

INCHES	MM
.234	5.94
.250	6.35
.297	7.54
.313	7.95
.375	9.52
.437	11.10
.469	11.91
.531	13.49
.625	15.88
.734	18.64
.766	19.46
1.157	29.39
1.219	30.96
1.234	31.34
1.266	32.16
1.594	40.49
1.625	41.28
1.719	43.66
2.5	64.

Part number M18327/30-	Dimension A (inches)	
	Min	Max
001 to 003	---	2.5
004 to 016	---	1.625
017 to 025	---	2.5

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminal identification: IN-C - Input
   OUT-C - Output

FIGURE 1. Case and mounting dimensions.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable lug.

Weight: 6.3 ounces for dash numbers 004 through 016; 9.0 ounces for dash numbers 001 through 003, and 017 through 025.

Terminal strength: Method 211, MIL-STD-202, test condition A (pull), 2 pounds; test condition E (torque), 8 ounce-inches.

Solderability: Method 208, MIL-STD-202. All terminations of each filter to be tested.
Solder dip dwell time: 5 seconds ±1/2 second.
Examination of terminations: At 10X magnification.

Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202, 500 Vrms between each terminal and case.
At reduced pressure: Method 301, MIL-STD-202, and method 105, test condition B, MIL-STD-202, 300 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:
2 hours at -55° +0°, -3°C.
2 hours at +105° +3°, -0°C.
Electrical characteristics - As specified in table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.
Test temperature 105° +10°, -5°C.
Signal input level - 2.0 volts to source resistor.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.
Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.
Electrical load not applicable.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 105°C.
Exposure time - 1 hour.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in saturated solution of sodium chloride and water.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Part number: M18327/030-(dash number from table I).

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR6RX11YY1	001	10K	10K	25	2 max	64		3	Zero
						80		9	
						120	30		
						160	40		
	002			10		50		6	
						75	30		
						100	40		
	003			20		100		6	
						150	30		
						200	40		
	004			30		150		6	
						225	35		
						300	40		
	005			40		200		6	
						300	35		
						400	40		
	006			80		400		6	
						600	35		
						800	40		
	007			100		500		6	
						750	35		
						1,000	40		
	008			160		800		6	
						1,200	35		
						1,600	40		
	009			200		1,000		6	
						1,500	35		
						2,000	40		

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

TABLE 1. Electrical characteristics - Continued.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR6RX11YY1	010	10K	10K	300	2 max	1,500 2,250 3,000	 35 40	6	Zero
	011			400		2,000 3,000 4,000	 35 40	6	
	012			500		2,500 3,750 5,000	 35 40	6	
	013			600		3,000 4,500 6,000	 35 40	6	
	014			800		4,000 6,000 8,000	 35 40	6	
	015			1,000		5,000 7,500 10,000	 35 40	6	
	016			2,000		10,000 15,000 20,000	 35 40	6	
	017	600	600	100		500 750 1,000	 35 40	6	
	018			200		1,000 1,500 2,000	 35 40	6	
	019			400		2,000 3,000 4,000	 35 40	6	
	020			500		2,500 3,750 5,000	 35 40	6	
	021			600		3,000 4,500 6,000	 35 40	6	
	022			800		4,000 6,000 8,000	 35 40	6	
	023			1,600		8,000 12,000 16,000	 35 40	6	
	024			2,000		10,000 15,000 20,000	 35 40	6	
	025			2,400		12,000 18,000 24,000	 35 40	6	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

Supersession data: Filters in this specification sheet supersede filters in MIL-F-18327/65(USAF) as follows:

MIL-F-18327/65 part number	MIL-F-18327/30 superseding part number
M18327/65-001	M18327/30-002
M18327/65-002	M18327/30-024

QUALITY ASSURANCE PROVISIONS

Qualification of filters based on similarity to qualified filters. Qualification by similarity may be granted to all parts covered in this specification based on the qualification of one part number. Qualification by similarity shall be restricted to those parts which meet the criteria for a similar filter as specified in MIL-F-18327. The contractor shall provide certification that any parts qualified on the basis of similarity meet the full requirements of this specification and MIL-F-18327.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0218-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-18327/30B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D.C. 20360
ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.