
MILITARY SPECIFICATION SHEET

FILTERS, HIGH PASS, TYPE FR6RX33YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

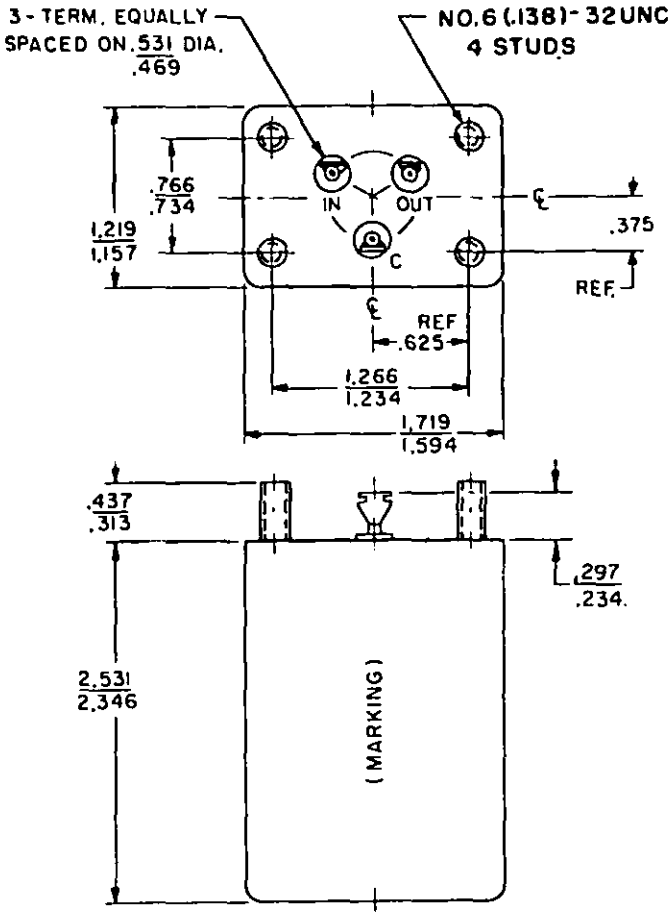

INCHES	MM
.234	5.94
.297	7.54
.313	7.95
.375	9.52
.437	11.10
.469	11.91
.531	13.49
.625	15.88
.734	18.64
.766	19.46
1.157	29.39
1.219	30.96
1.234	31.34
1.266	32.16
1.594	40.49
1.719	43.66
2.346	59.59
2.531	64.29

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminal identification: IN-C - Input
   OUT-C - Output

FIGURE 1. Case and mounting dimensions.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable lug.

Weight: 9 ounces.

Terminal strength: Method 211, MIL-STD-202: test condition A (pull), 2 pounds: test condition E (torque), 8 ounce-inches.

Solderability: Method 208, MIL-STD-202. All terminations of each filter to be tested.
Solder dip dwell time: 5 seconds ±1/2 second.
Examination of terminations: At 10X magnification.

Dielectric withstanding voltage:
At atmospheric pressure: Method 301, MIL-STD-202. 500 Vrms between each terminal and case.
At reduced pressure: Method 301, MIL-STD-202, and method 105, test condition B, MIL-STD-202, 300 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:
1 hour at -55° +0°, -3°C.
1 hour at +105° +3°, -0°C.
Electrical characteristics - As specified in table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.
Test temperature 105° +10°, -5°C.
Signal input level - 2.0 volts to source resistor.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.
Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.
Electrical load not applicable.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 105°C.
Exposure time - 1 hour.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

Immersion: Method 104, test condition B, MIL-STD-202. Immerse for 15 minutes in saturated solution of sodium chloride and water.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Part number: M18327/31-(dash number from table I).

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR6RX33YY1	001	10K	10K	250	2 max	5,000 to 70 50 33.5 25	 30 35	 3 9	Zero
	002			500		100 66.7 50	 35 40	6	
	003			750		150 100 75	 35 40	6	
	004			1,000		200 133 100	 35 40	6	
	005			1,500		300 200 150	 35 40	6	
	006			2,000		400 267 200	 35 40	6	
	007			2,500		500 333 250	 35 40	6	
	008			3,000		600 400 300	 35 40	6	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical characteristics - Continued.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR6RX33YY1	009	10K	10K	4,000	2 max	800 533 400	 35 40	6	Zero
	010			5,000		1,000 667 500	 35 40	6	
	011			6,000		1,200 800 600	 35 40	6	
	012			10,000		2,000 1,333 1,000	 35 40	6	
	013			12,000		2,400 1,600 1,200	 35 40	6	
	014			15,000		3,000 2,000 1,500	 35 40	6	
	015			24,000		4,800 3,200 2,400	 35 40	6	
	016	600	600	200		40 26.8 20	 30 40	6	
	017			1,000		200 131 100	 35 40	6	
	018			1,500		300 200 150	 35 40	6	
	019			2,500		500 333 250	 35 40	6	
	020			5,000		1,000 667 500	 35 40	6	
	021			15,000		3,000 2,000 1,500	 35 40	6	
	022			35,000		7,000 4,666 3,500	 35 40	6	

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS

Qualification of filters based on similarity to qualified filters. Qualification by similarity may be granted to all parts covered in this specification based on the qualification of one part number. Qualification by similarity shall be restricted to those parts which meet the criteria for a similar filter as specified in MIL-F-18327. The contractor shall provide certification that any parts qualified on the basis of similarity meet the full requirements of this specification and MIL-F-18327.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0218-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:21Z
Check the source to verify that this is the current version before use.