
MILITARY SPECIFICATION SHEET

FILTER, LOW PASS, TYPE FR4RX11YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

Ⓑ THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER THE DATE OF THIS SPECIFICATION

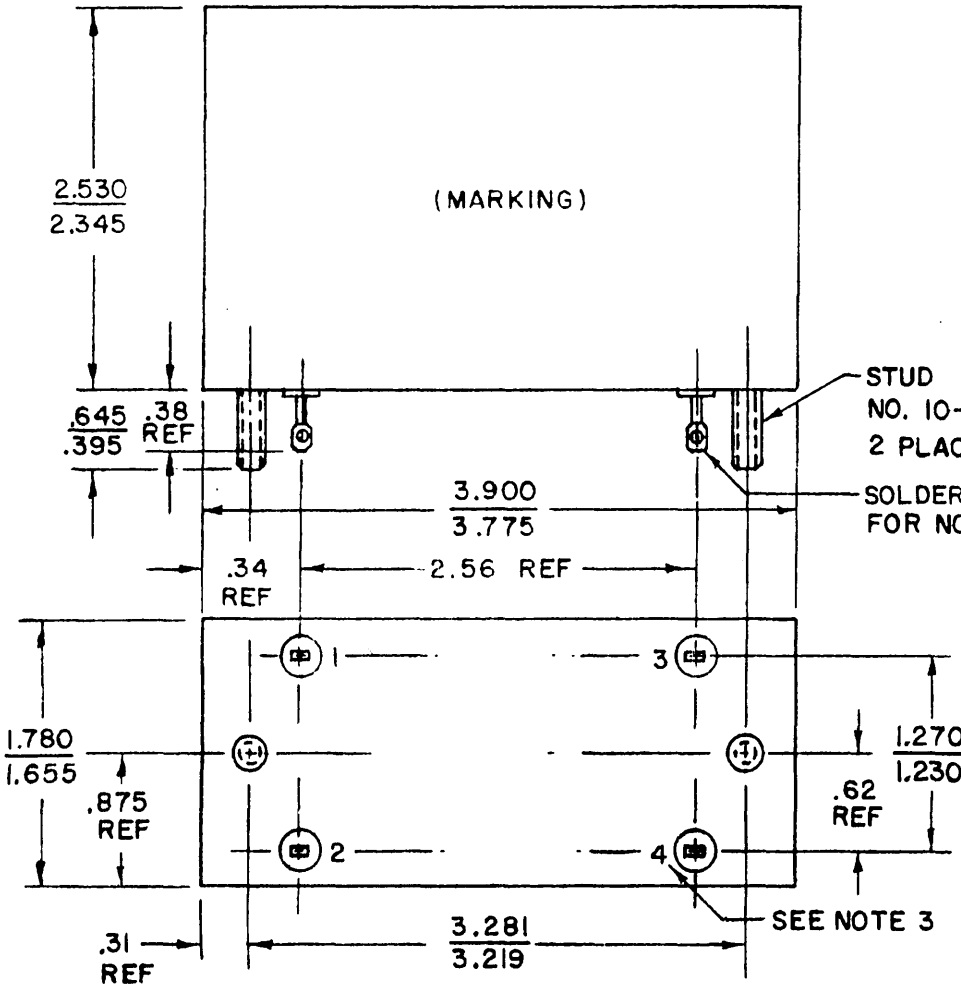

INCHES	MM
.31	7.9
.34	8.6
.38	9.7
.395	10.03
.62	15.7
.645	16.38
.875	22.22
1.230	31.24
1.270	32.26
1.655	42.04
1.780	45.21
2.345	59.56
2.530	64.26
2.560	65.02
3.219	81.76
3.281	83.34
3.775	95.88
3.900	99.06

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Terminal identification: 1 Input
   3 Output
   2-4 Common

FIGURE 1. Case and mounting dimensions.

Ⓑ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solderable lug.

Weight: 1-1/4 pounds.

Terminal strength: Method 211, MIL-STD-202.

Test condition A (Pull) - 4.5 pounds.

Test condition E (Torque) - 11 ounce-inches.

Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 seconds.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage:

At atmospheric pressure: Method 301, MIL-STD-202. 500 Vrms between each terminal and case.

At reduced pressure: Method 301, MIL-STD-202, and Method 105, test condition B, MIL-STD-202. 450 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

2 hours at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

2 hours at $105^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C.

Electrical measurements to be performed in accordance with table I.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature $105^{\circ}\ ^{+10^{\circ}}_{-5^{\circ}}$ C.

Signal input level - 3 Vrms at reference frequency.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Electrical characteristics - As specified in table I.

Temperature rise: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:22Z
Check the source to verify that this is the current version before use.

Vibration: Method 201, MIL-STD-202.

Tests and measurements prior to vibration: Not applicable.

Electrical load not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 105°C.

Exposure time - 1 hour.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Filters shall be immersed for 15 minutes in a saturated solution of sodium chloride and water.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Part number: M18327/041-001.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (kHz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR4RX11YY1	001	1,500	1,500	1	1.5 max	500		0	Zero
						1,000		1.5	
						6,000		2.0	
						9,000	20		
						20,000	40		

Source: https://assist.dla.mil -- Downloaded: 202640-18T11:22Z
Check the source to verify that this is the current version before use.

Ⓑ Quality assurance provisions:

Qualification inspection: Not applicable for this specification.

Quality conformance inspection: Group A and B tests of MIL-F-18327 shall be applicable.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - OS
Air Force - 11, 17
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5915-0232-41)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:22Z
Check the source to verify that this is the current version before use.