
MILITARY SPECIFICATION SHEET

FILTER, LOW PASS, TYPE FR6RX11YY1

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

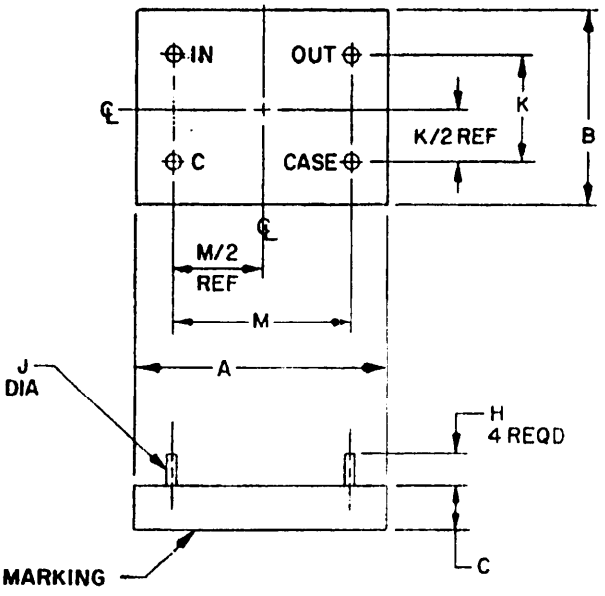

Type designation	Dash No.		Dimensions									Weight
			A	B	C	H	J	K	K/2	M	M/2	
FR6RX11YY1	001	Min	1.906 (48.41)	1.469 (37.31)	.281 (7.14)	.219 (5.56)	.035 (.89)	.790 (20.07)	.400 (10.16)	1.390 (35.31)	.700 (17.78)	2 oz.
		Max	2.031 (51.59)	1.531 (38.89)	.406 (10.31)	.281 (7.14)	.045 (1.14)	.810 (20.57)		1.410 (35.81)		
	002	Min	1.906 (48.41)	1.906 (48.41)	.406 (10.31)	.219 (5.56)	.035 (.89)	1.390 (35.31)	.700 (17.78)	1.390 (35.31)	.700 (17.78)	2.5 oz.
		Max	2.031 (51.59)	2.031 (51.59)	.531 (13.49)	.281 (7.14)	.045 (1.14)	1.410 (35.81)		1.410 (35.81)		

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Terminal identification: IN-C – Input
   OUT- Case - Output

Case and mounting dimensions.

Ⓑ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure and table I.

Case: Metal.

Terminals: Pin.

Weight: See table I.

Terminal strength: Method 211, MIL-STD-202.
Test condition A - (Pull) force --- 2 pounds.

(B) Dielectric withstanding voltage: Method 301, MIL-STD-202.
At atmospheric pressure: 500 vrms between each terminal and case.
At reduced pressure: Method 301, MIL-STD-202, and Method 105, test condition B, MIL-STD-202. 300 vrms between each terminal and case.

Insulation resistance: Method 302, test condition B, MIL-STD-202. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

1 hour at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

1 hour at $105^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C.

Electrical characteristics - As specified in table II.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics: See table II.

Life: Method 108, test condition F, MIL-STD-202.
Test temperature $105^{\circ}\ ^{+10^{\circ}}_{-5^{\circ}}$ C.
Signal input level - 2.0 volts to source resistor.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 1,000 megohms between each terminal and case.
Electrical characteristics - As specified in table II.

Temperature rise: Not applicable.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.
Electrical load not applicable.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table II.

(B) Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Electrical characteristics - As specified in table II.


Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 105°C.
Exposure time - 1/2 hour.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Filters shall be immersed for 15 minutes in saturated solution of sodium chloride and water.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.
Measurements at 25°C after test:
Dielectric withstanding voltage - At atmospheric pressure.
Insulation resistance - Not less than 10,000 megohms between each terminal and case.

Part number: Consists of the basic number of this specification sheet and a dash number from table II.

Example:

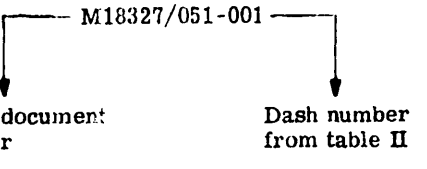

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:23Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion loss (dB)	Frequency range	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR6RX11YY1	001	10K	10K	1,000	1 max	DC to 4.2 kHz 5 kHz 6.4 kHz and above	 43	1 1.5 to 4.5	Zero
	002	10K	10K	120	2 max	DC to 450 Hz 600 Hz 800 Hz	 1 36	1 5	Zero

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU, MI
Navy - AS, OS, SH
Air Force - 11, 17, 85
DSA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5915-0121-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:23Z
Check the source to verify that this is the current version before use.