
MILITARY SPECIFICATION SHEET

FILTER, LOW PASS, TYPE FR4SX11YY1

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filter described herein shall consist of this document and the latest issue of Specification MIL-F-18327.

© THIS SPECIFICATION IS INACTIVE FOR NEW DESIGN AFTER THE DATE OF THIS SPECIFICATION

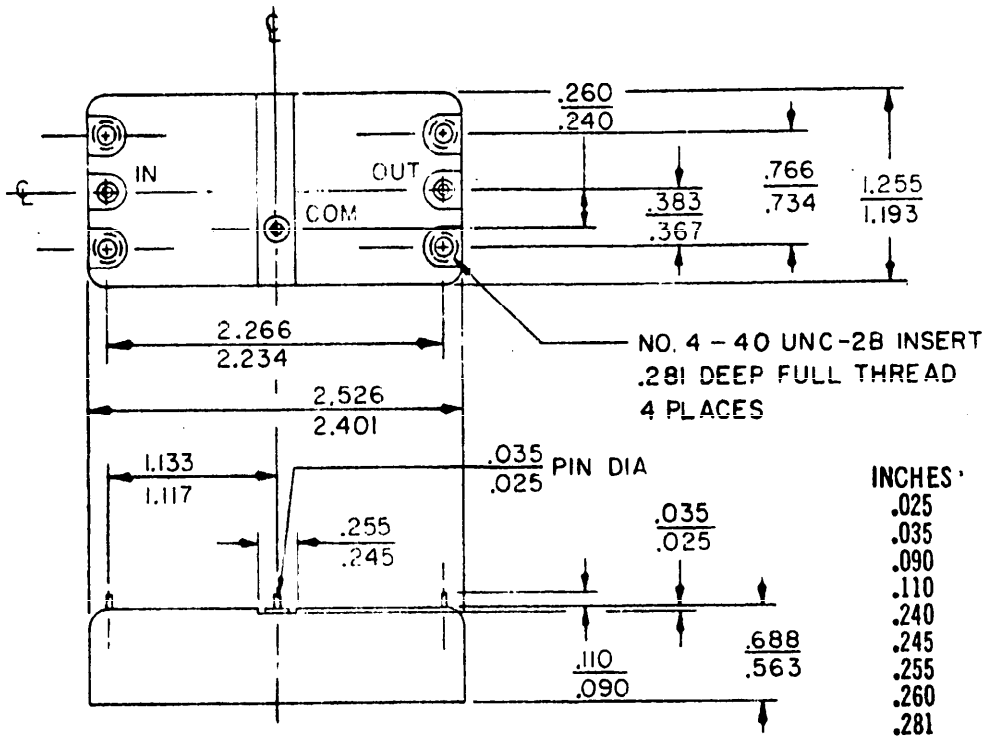

INCHES	MM	INCHES	MM
.025	.64	.688	17.48
.035	.89	.734	18.64
.090	2.29	.766	19.46
.110	2.79	1.117	28.37
.240	6.10	1.133	28.78
.245	6.22	1.193	30.30
.255	6.48	1.255	31.88
.260	6.60	2.234	56.74
.281	7.14	2.266	57.56
.367	9.32	2.401	60.99
.383	9.73	2.526	64.16
.563	14.30		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1 inch = 25.4 mm.
3. Terminal identification: IN - Input, OUT - Output, COM - Common.

FIGURE 1. Case and mounting dimensions.

© denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case: Metal.

(C) Terminals: Solderable pin.

Weight: 3.5 ounces maximum.

Terminal strength: Method 211, MIL-STD-202.

Test condition A - (Pull) force --- 2 pounds.

(C) Solderability: Method 208, MIL-STD-202. All terminations, of each filter, to be tested.

Solder dip dwell time: 5 ±1/2 second.

Examination of terminations: At 10X magnification.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

At atmospheric pressure: 200 Vrms between each terminal and case.

At reduce pressure: Method 301, MIL-STD-202, and Method 105, test condition B, MIL-STD-202. 200 Vrms between each terminal and case.

Insulation resistance: Method 302, test condition A, MIL-STD-202. Not less than 1,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

1 hour at $-55^{\circ}\ ^{+0^{\circ}}_{-3^{\circ}}$ C.

1 hour at $125^{\circ}\ ^{+3^{\circ}}_{-0^{\circ}}$ C.

Electrical characteristics - As specified in table I.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics: See table I.

Life: Method 108, test condition F, MIL-STD-202.

Test temperature $125^{\circ}\ ^{+10^{\circ}}_{-5^{\circ}}$ C.

Signal input level - 3 Vrms at reference frequency.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Electrical characteristics - As specified in table I.

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:23Z
Check the source to verify that this is the currentversion before use.

Temperature rise: Not applicable.

Vibration: Method 201, MIL-STD-202.

Electrical load: Not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Electrical characteristics - As specified in table I.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be 125°C.

Exposure time - 1/2 hour.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Immersion: Method 104, test condition B, MIL-STD-202. Filters shall be immersed for 15 minutes in saturated solution of sodium chloride and water.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

Moisture resistance: Method 106, MIL-STD-202.

Measurements at 25°C after test:

Dielectric withstanding voltage - At atmospheric pressure.

Insulation resistance - Not less than 1,000 megohms between each terminal and case.

(C) Part number: M18327/53 - (dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 202610-18T11:23Z
Check the source to verify that this is the currentversion before use.

TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (kHz)	Insertion loss (dB)	Frequency range (Hz)	Discrimination (dB)		DC operating voltage (volts)
		Source	Load				Min	Max	
FR4SX11YY1	001	5,000 ±10%	5,000 ±10%	1	1.0 max	300 2,500 3,000 3,500 >5,000	+.5 +.5 1.5 18 60	-.5 -.5 4.5	Zero

Preparing activity:
Air Force - 85

(Project 5915-0232-53)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:23Z
Check the source to verify that this is the current version before use.