
MILITARY SPECIFICATION SHEET

FILTER, BAND PASS, TYPE FR6RX22YY1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-18327.

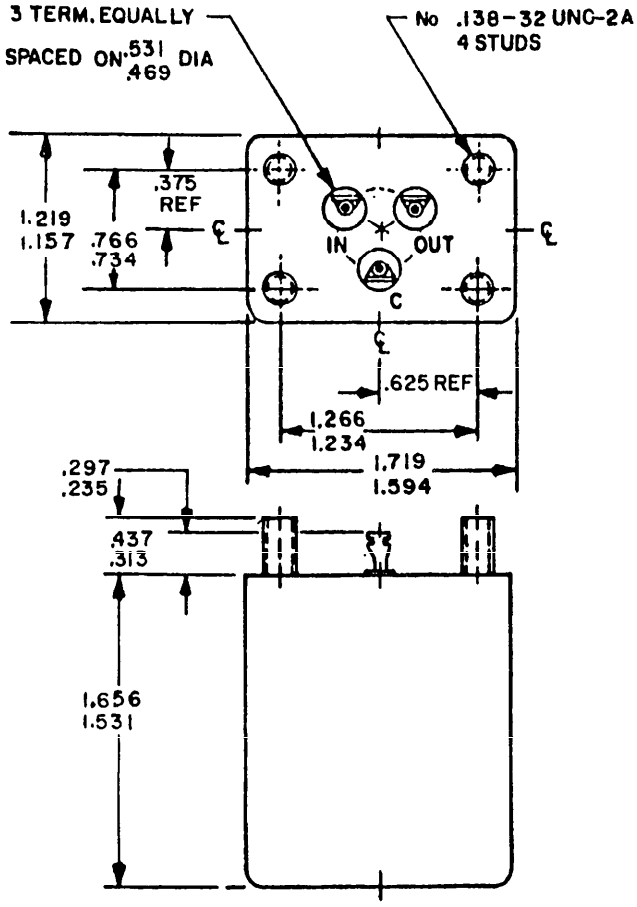

INCHES	MM
.138	3.51
.235	5.97
.297	7.54
.313	7.95
.375	9.53
.437	11.10
.469	11.91
.531	13.49
.625	15.88
.734	18.64
.766	19.46
1.157	29.39
1.219	30.96
1.234	31.34
1.266	32.16
1.531	38.89
1.594	40.49
1.656	42.06
1.719	43.66

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Terminal identification: IN - C Input
   OUT - C Output

FIGURE 1. Case and mounting dimensions.

Ⓑ denotes changes

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal

Terminals: Solder lug.

Weight: .375 pound (170.10 grams).

Terminal strength: MIL-STD-202, method 211.

Test conditions A and E.

Test condition A (Pull), force: 2 pounds.

Test condition E (Torque): 8 ounce-inches.

Dielectric withstanding voltage:

At atmospheric pressure: MIL-STD-202, method 301. 500 V rms between each terminal and case.

At reduced pressure: MIL-STD-202, method 301, and method 105, test condition B. 450 V rms between each terminal and case.

Insulation resistance: MIL-STD-202, method 302, test condition B. Not less than 10,000 megohms when measured between each terminal and case.

Stability at temperature extremes:

2 hours at -55°C +0°C, -3°C.

2 hours at 105°C +3°C, -0°C.

Electrical characteristics: As specified in table I.

Electrical characteristics: See table I.

Life: MIL-STD-202, method 108, test condition F.

Test temperature: 105°C +10°C, -5°C.

Signal input level: 2 V rms to source resistor.

DC operating voltage: Zero.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 1,000 megohms between each terminal and case.

Electrical characteristics: As specified in table I.

Temperature rise: Not applicable.

Vibration: MIL-STD-202, method 204, test condition B.

Electrical load: Not applicable.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Electrical characteristics: As specified in table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

Shock (specified pulse): MIL-STD-202, method 213, test condition I.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Electrical characteristics: As specified in table I.

Thermal shock: MIL-STD-202, method 107, test condition A, except that step 3 shall be 105°C.

Exposure time: 1 hour.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 10,000 megohms between each terminal and case.

Immersion: MIL-STD-202, method 104, test condition B. Immersed for 15 minutes in saturated solution of sodium chloride and water.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 10,000 megohms between each terminal and case.

Moisture resistance: MIL-STD-202, method 106.

Measurements at 25°C after test:

Dielectric withstanding voltage: At atmospheric pressure.

Insulation resistance: Not less than 10,000 megohms between each terminal and case.

Part number: M18327/64- (dash number from table I).

(B) TABLE I. Electrical characteristics.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion gain of frequency (dB)	Frequencies of discrimination (Hz)	Discrimination (dB)	
		Source	Load				Min	Max
FR6RX22YY1	01	10K	More than 10 MΩ	300	2	150 and below 291 to 309 600 and above	40 40	 2
FR6RX22YY1	02	10K	More than 10 MΩ	30	2	15 and below 29.1 to 30.9 60 and above	35 35	 2
FR6RX22YY1	03	10K	More than 10 MΩ	50	2	25 and below 48.5 to 51.5 100 and above	35 35	 2
FR6RX22YY1	04	10K	More than 10 MΩ	60	2	30 and below 58.2 to 61.8 120 and above	40 40	 2
FR6RX22YY1	05	10K	More than 10 MΩ	90	2	45 and below 87.0 to 93.0 180 and above	40 40	 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Electrical characteristics - Continued.

Type designation	Dash number	Impedance (ohms)		Reference frequency (Hz)	Insertion gain of frequency (dB)	Frequencies of discrimination (Hz)	Discrimination (dB)	
		Source	Load				Min	Max
FR6RX22YY1	06	10K	More than 10 MΩ	100	2	50 and below 97.0 to 103.0 200 and above	40 40	 2
FR6RX22YY1	07	10K	More than 10 MΩ	120	2	60 and below 116.4 to 123.6 240 and above	40 40	 2
FR6RX22YY1	08	10K	More than 10 MΩ	150	2	75 and below 145.5 to 154.5 300 and above	40 40	 2
FR6RX22YY1	09	10K	More than 10 MΩ	200	2	100 and below 194 to 206 400 and above	40 40	 2
FR6RX22YY1	10	10K	More than 10 MΩ	240	2	120 and below 233 to 247 480 and above	40 40	 2
FR6RX22YY1	11	10K	More than 10 MΩ	400	2	200 and below 388 to 412 800 and above	40 40	 2

Ⓑ Qualification inspection: Not applicable.

Ⓑ Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Air Force - 85

(Project 5915-0288-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T11:24Z
Check the source to verify that this is the current version before use.