MILITARY SPECIFICATION

COMPUTER ASSEMBLY 7647811, PACKAGING OF

1. SCOPE

1.1 This specification covers the packaging and packing of Computer Assembly 7647811 for each level of protection.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal

LLL-F-291	- Fiberboard; Corrugated, Single Face (Flexible).
PPP-B-621	- Boxes, Wood, Nailed and Lock-Corner.

Military

JAN-P-100	- Packaging and Packing for Overseas Shipment - General Specification.
JAN-P-106	- Boxes; Wood, Nailed (Overseas Type).
MIL-P-116	- Preservation, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Flexible (Waterproofed).
JAN-P-127	- Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant.
MIL-B-131	- Barrier Material; Water Vaporproof, Flexible.
MIL-D-3464	- Desiccants Activated (in Bags) for Static Dehumidification and Packaging.
MIL-A-5092	- Adhesive, Rubber (Synthetic and Reclaimed Rubber Base).
MIL-G-12803	- Gasket Materials, Nonmetallic.

STANDARD

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

FSC 1220

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

DRAWING

Army-Navy Aeronautical

AN-7513 - Humidity Indicator, Small.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. - Material shall be as specified herein. Material not definitely specified shall be of good commercial quality, entirely suitable for the purpose. Material shall be free from defects and imperfections that might affect the serviceability of the finished preservation, packaging, and packing. Unless otherwise specified, the contractor shall provide the Government inspector inspection certification of adherance to the requirements of material specifications.

3.2 Cleaning and packaging

3.2.1 Level A

3.2.1.1 Cleaning

3.2.1.1.1 The unpainted metal surfaces shall be cleaned in accordance with process C-1 of Specification MIL-P-116.

3.2.1.1.2 The threaded nipple adjacent to the handwheel assembly shall be covered with barrier material conforming to grade C of Specification MIL-B-121.

3.2.1.2 Packaging. - Method IIa packaging in accordance with Specification MIL-P-116, shall be accomplished as follows:

3.2.1.2.1 Construct primary base. (see figure 1)

3.2.1.2.2 Position carriage bolts up thru the primary base and place gaskets over the bolts as shown in figure 2. Gaskets shall be approximately 2-1/2 inches square and of material conforming to Specification MIL-G-12803.

3.2.1.2.3 Adhesive conforming to Specification MIL-A-5092 shall be applied to the gaskets and around the bolt holes. A pre-cut sheet of water-vaporproof barrier material shall be positioned over the bolts. The barrier material shall conform to Specification MIL-B-131, class 1. Adhesive shall again be applied and another set of gaskets pressed in position.

3.2.1.2.4 A piece of single face corrugated material, slightly larger than the area of the secondary base, shall be placed over the bolts. The corrugated material shall conform to Specification LLL-F-291, any type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.2.1.2.5 A secondary base shall be constructed as shown (figure 3) and placed in position as illustrated (figure 4). A flat washer, lock washer, and nut shall be applied to the shortest of the four bolts in the position as indicated.

3.2.1.2.6 The computer assembly shall be secured on the secondary base by means of three iron clamps. The iron clamps shall be fabricated in accordance with figure 6. A small pad of material conforming to grade C of Specification MIL-B-121 shall be used in the contact area between each clamp and the assembly. (see figure 5)

3.2.1.2.7 To prevent possible damage to the barrier, the handwheel assembly and the pointer shall be wrapped with barrier material conforming to grade A of Specification MIL-B-121. The wraps shall be secured with pressure sensitive tape. (see figure 7)

3.2.1.2.8 The flexible shaft shall be secured around the computer assembly with pressure sensitive tape.

3.2.1.2.9 The required units of desiccant, conforming to Specification MIL-D-3464, shall be secured to the assembly with pressure sensitive tape conforming to Specification JAN-P-127.

3.2.1.2.10 A humidity indicator conforming to Drawing AN-7513 shall be attached to the top of the assembly with pressure sensitive tape.

3.2.1.2.11 The barrier shall be formed and sealed as quickly as possible after the application of desiccant. Excess entrapped air shall be exhausted prior to final closure. (see figure 8)

3.2.2 Level C

3.2.2.1 Cleaning. - Cleaning shall be as specified in 3.2.1.1.

3.2.2.2 Packaging. - Method III packaging shall be accomplished as follows:

3.2.2.2.1 Construct primary base (figure 1). Position carriage bolts up thru primary base.

3.2.2.2.2 A secondary base (figure 2) shall be constructed and placed over the primary base.

3.2.2.2.3 The computer assembly shall be secured by means of three iron clamps. The iron clamps shall be fabricated in accordance with figure 6. A small pad of material conforming to grade C of Specification MIL-B-121 shall be used in the contact area between each clamp and the assembly.

3.2.2.2.4 The flexible shaft shall be secured around the computer assembly with pressure sensitive tape.

3.3 Packing

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.3.1 Level A

3.3.1.1 The packaged assembly, on its base, shall be immobilized in a wood shipping container by means of four wood hold down cleats. (see figure 9)

3.3.1.1.1 The wood box shall conform to Specification JAN-P-106, style 2 or 4.

3.3.1.1.2 The container shall be strapped in accordance with Appendix I of the box specification.

3.3.2 Level B

3.3.2.1 Packing shall be as specified in 3.3.1 except that the shipping container shall conform to Specification PPP-B-621, style 2 or 4.

3.3.3 Level C

3.3.3.1 The packaged assembly, mounted on its base, shall be immobilized in a wood shipping container by means of four wood hold down cleats.

3.3.3.1.1 The shipping container shall conform to Specification PPP-B-621, style 2 or 4.

3.4 Marking

3.4.1 Marking shall be in accordance with Standard MIL-STD-129.

3.4.1.1 The method of preservation shall be marked, as part of the basic marking, on all containers as follows:

Levels A and B	METHOD OF PRESERVATION IIa
Level C	METHOD OF PRESERVATION III

3.4.2 Exterior containers packed for Level C protection shall be marked: "MIL MIL PKG".

3.4.3 Oversea marking. - The following marking requirements shall apply to oversea shipments only:

3.4.3.1 Service symbol shall be stenciled on the same surface immediately adjacent to the oversea address. The symbol shall be of a size commensurate with the oversea address and of the same color.

3.4.3.2 The SNL group (SNL-F) shall be stenciled on the sides of the container adjacent to the service color corner marking. The size shall be commensurate with the basic marking on the shipping container.

3.4.3.3 Exterior container marking shall be protected with a coating of transparent waterproof material in accordance with Standard MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.5 Workmanship. - Adequate controls shall be utilized to check for contamination of cleaning solvents and preservatives. Wraps shall be neat, conforming, and firmly secured. Tapes shall be uniformly applied to interior boxes and shall completely cover and adhere to all joints and seams. Shipping containers shall be free of protruding staples, screws, nails, etc. Strapping shall be applied perpendicular to the sides of the container just prior to shipment and shall not cover any container marking. Irrevalent marking shall be neatly obliterated. Visual observation shall indicate that the application of specified materials and methods are practical and will not result in packaging or packing deficiencies.

4. QUALITY ASSURANCE PROVISIONS

4.1 General. - The inspection and test procedures specified in this section are those that shall be conducted (as applicable) to determine acceptability of the packaging and packing covered by this specification. The tests shall be accomplished by the contractor or his agent under the supervision of the Government inspector. The inspection and test procedures shall be conducted in process. Unless otherwise specified in the detail specification or contract, and prior to any production, the pilot pack shall have met all the requirements of 4.4 and 4.5 herein.

4.2 Lot sizes. - The lot size submitted for acceptance purposes shall be determined by the procuring activity or Government inspection agency and shall be as large as is practicable, consistent with available facilities.

4.3 Sampling

4.3.1 For inspection. - Sampling for inspection shall be conducted in accordance with Standard MIL-STD-105.

4.3.2 For tests. - Sampling tests for packages shall be conducted in accordance with Table I.

TABLE I - SAMPLING

Lot Size Packages	Sample Size	Rejection Number
3 to 50	3	1
51 to 500	5	1
501 to 1000	10	2
1001 and over	15	3

4.4 Inspection

4.4.1 Classification of defects. - Visual inspection for derects established in Table II shall apply to each item of the applicable sample of interior packages or exterior containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

TABLE II - CLASSIFICATION OF DEFECTS

Major Defects

AQL = 1.0 percent	Method of Inspection
Incorrect marking	Visual
Illegible marking	Visual

Minor Defects

AQL = 2.5 percent	Method of Inspection
Improper closure of interior packages	Visual
Inadequate strapping or mailing	Visual
Inadequate blocking	Visual
Improper packing (insufficient clearance between contents and container; container oversize; inadequate or excessive cushioning material; etc.)	Visual
Inadequate bolting	Manual-Visual
Immobilized items, desiccant and interior packages.	Manual-Visual

Incidental Defects

AQL = 6.5 percent	Method of Inspection
Workmanship	Visual

4.5 Tests

4.5.1 Rough handling test. - The pilot pack shall be subjected to the rough handling test in accordance with the requirements of Specification JAN-P-100. Applicable only to level A.

4.5.2 Packaging tests. - Each package in the applicable sample of Table I shall be subjected to the pertinent packaging tests of Specification MIL-P-116 as determined by the methods of preservation shown in Table III.

4.6 Acceptance and rejection.

4.6.1 Final acceptance.

4.6.1.1 Inspection. - Lots shall be accepted when the applicable samples have met the requirements of the inspection of defects established in Table II.

4.6.1.2 Tests.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

TABLE III - PACKAGING TESTS

TEST	METHOD OF PRESERVATION														
	I	IA-1	IA-2	IA-5	IA-8	IB-1	IC-1	IC-2	IC-3	IC-4	IC-5	II a	II b	II c	II d	II e	III
Heat Seal (Applicable to level A)					x							x	x	x		x	
Quick leak (Applicable to level A)		x	x	x	x							x	x	x	x	x	
*Waterproofness (Applicable to level A)							x	x	x	x	x						
Determination of cleanliness test (Applicable to levels A and C)		(Required when a cleaning process is used.)															
Preservative compound application (Applicable to levels A and C)		(Required when a preservative is used.)															

*When the size, weight, or other characteristics of Method IC packages precludes the use of the waterproofness test, the water spray test shall be used in lieu thereof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

4.6.1.2.1 Tests for packages. - Lots shall be accepted when the defective units found during tests are less than the rejection number shown in Table I. Lots shall be rejected when the defective units equal or exceed the rejection number.

4.6.2 Corrective action. - Defective packages and packs from lots which have been accepted shall be corrected prior to shipment.

5. PREPARATION FOR DELIVERY

(There are no applicable requirements.)

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) The level of protection required.
(c) Applicable stock number.

6.2 Replacement of packaging materials. - The procurement documents should specify that all packaging materials and containers which become unserviceable during inspection and tests shall be replaced prior to shipment of the items.

6.3 The following table is furnished for information only:

Material	No. Required	Size
Hold down cleat, wood	4	14 3/8 x 2 5/8 x 3/4
Gasket	8	2 1/2 x 2 1/2
Barrier (MIL-B-131)	1	60 x 36
Single face flexible corrugated material.	1	15 x 17
Grade C Barrier	1 3	2 x 2 2 1/2 x 2 1/2
Grade A Barrier	1 1	14 x 24 1 1/2 x 3
Desiccant	64 units	
Pressure sensitive tape	as required	
Iron clamp	3	as illustrated
Carriage bolt	3 1	3/8 x 4 3/8 x 3 1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

SHIPPING CONTAINER

Material	No. Required	Size
Inside dimensions	L 22 1/4 W 17 3/4	H 16
Displacement	8.2 cubic feet	
Weight	Net 96 lbs. Gross 147 lbs.	

Patent notice. - When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodian:
Army-Ordnance Corps

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.


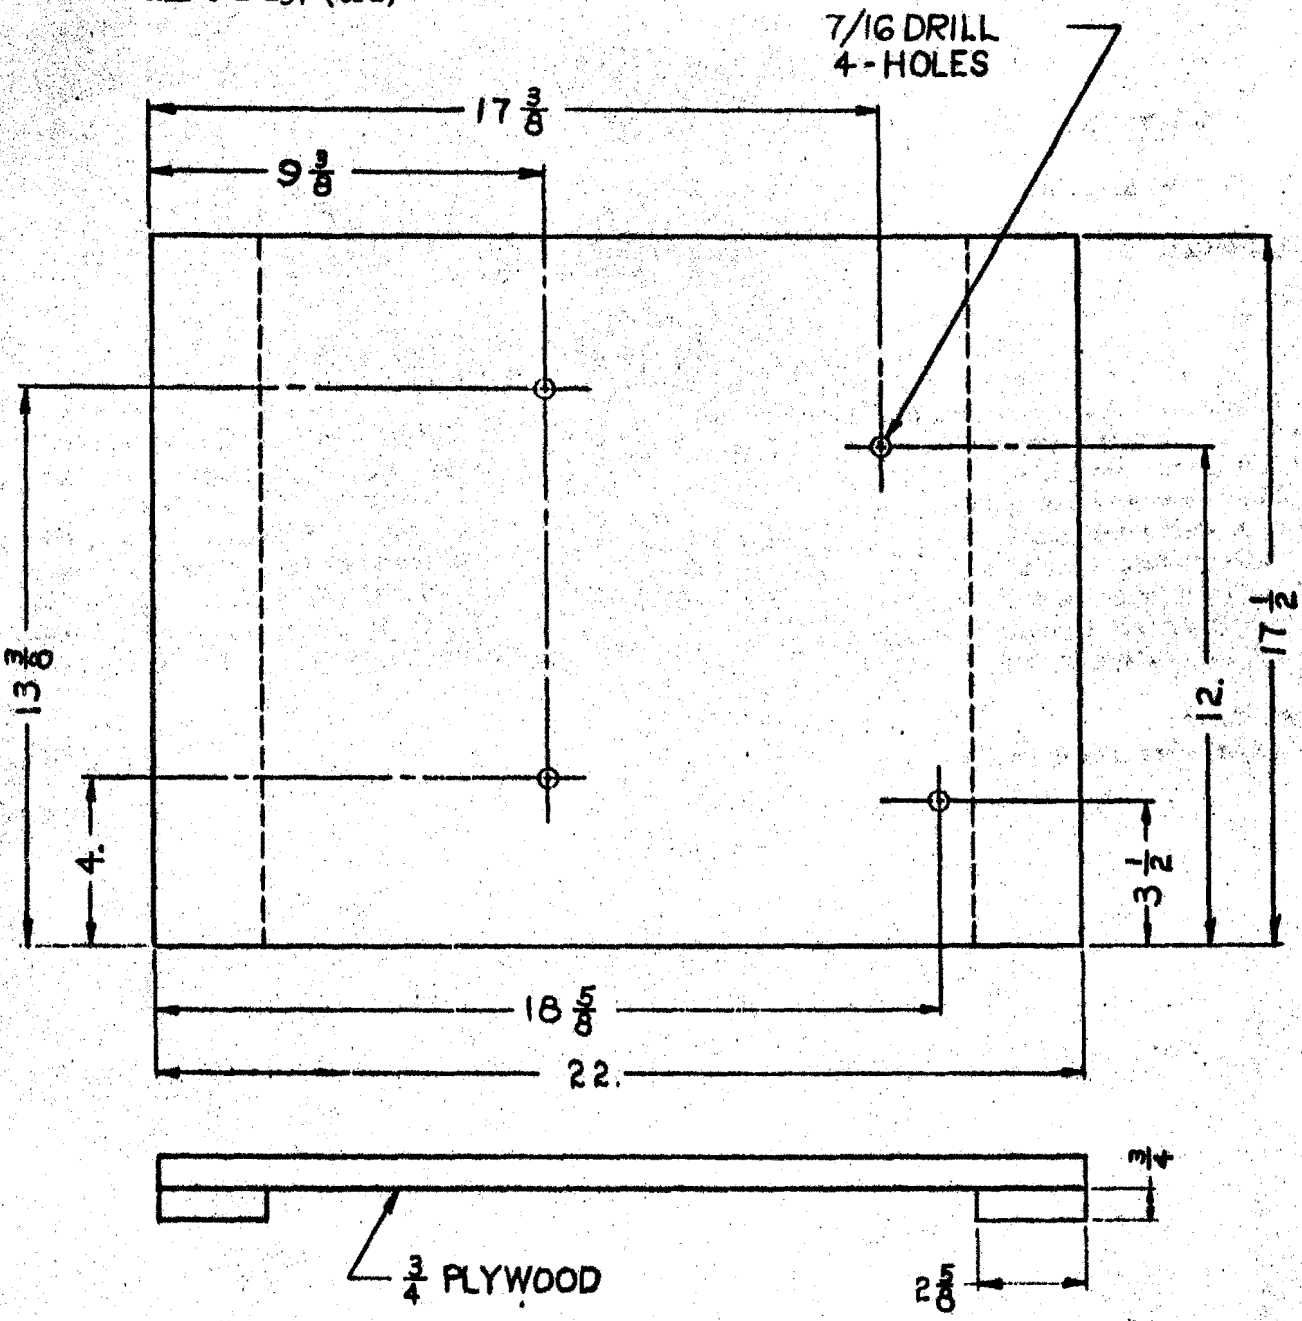


FIGURE 1
PACKAGING OF COMPUTER ASSEMBLY
PRIMARY BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

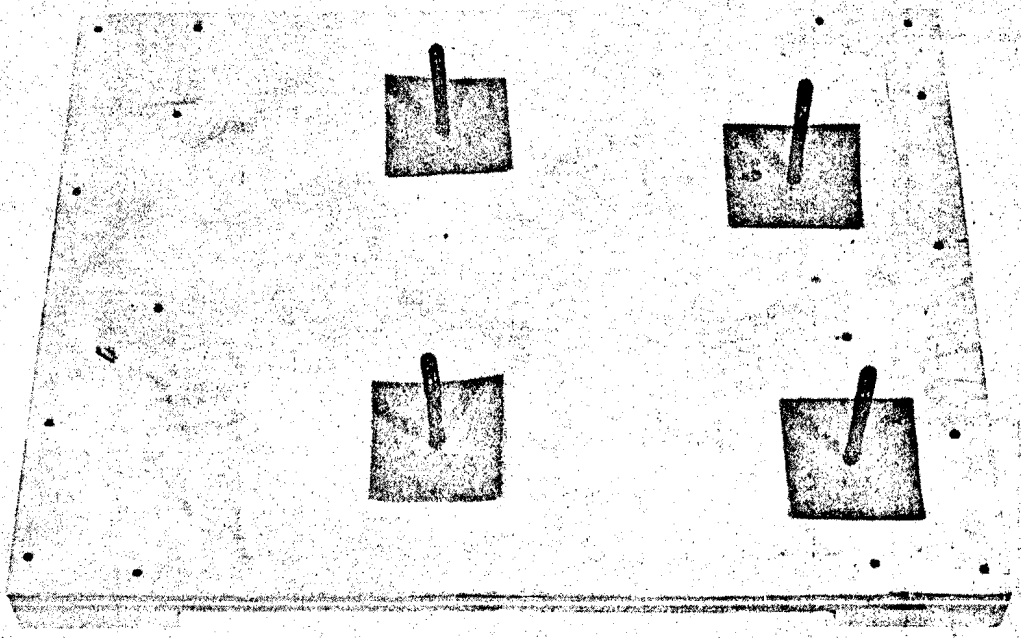

Neg. #26147-1 7/11/55 FRANKFORD ARSENAL ORD CORPS.

PACKAGING OF COMPUTER ASSEMBLY - Primary Base with Bolts and First Set of Gaskets
FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.


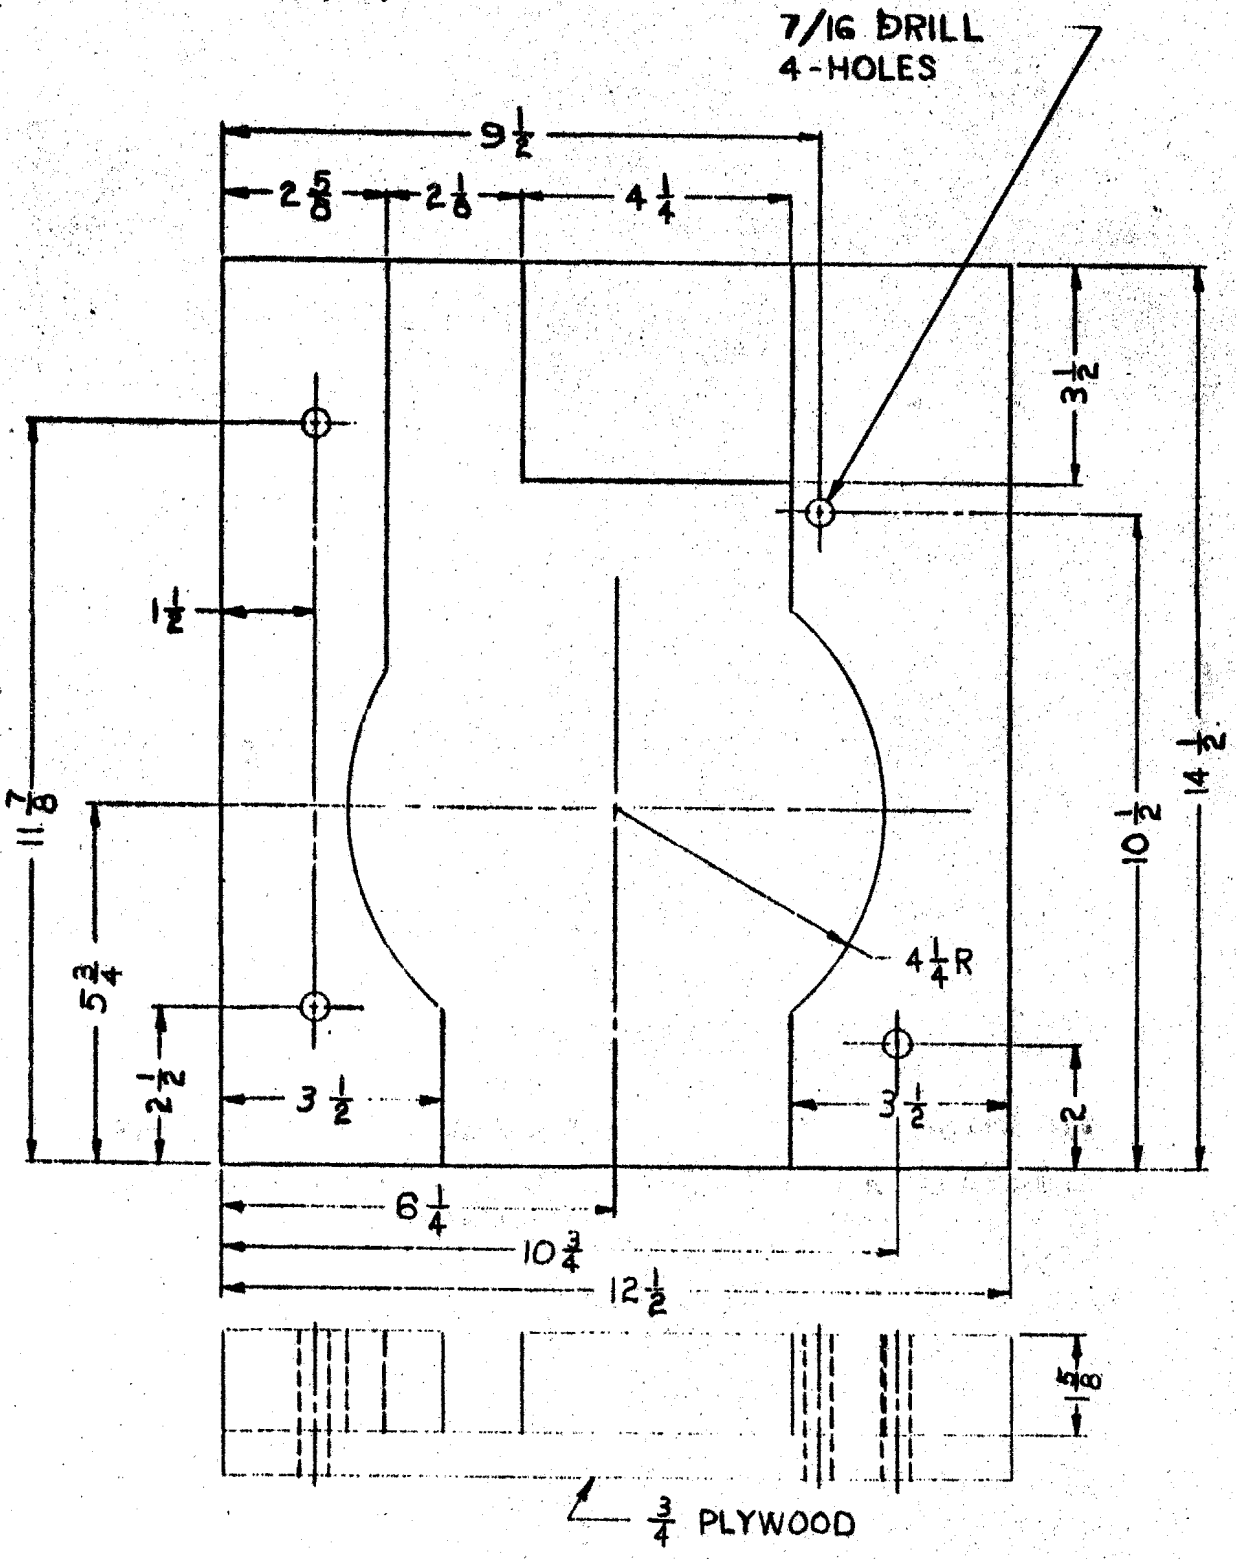


FIGURE 3
PACKAGING OF COMPUTER ASSEMBLY
SECONDARY BASE

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

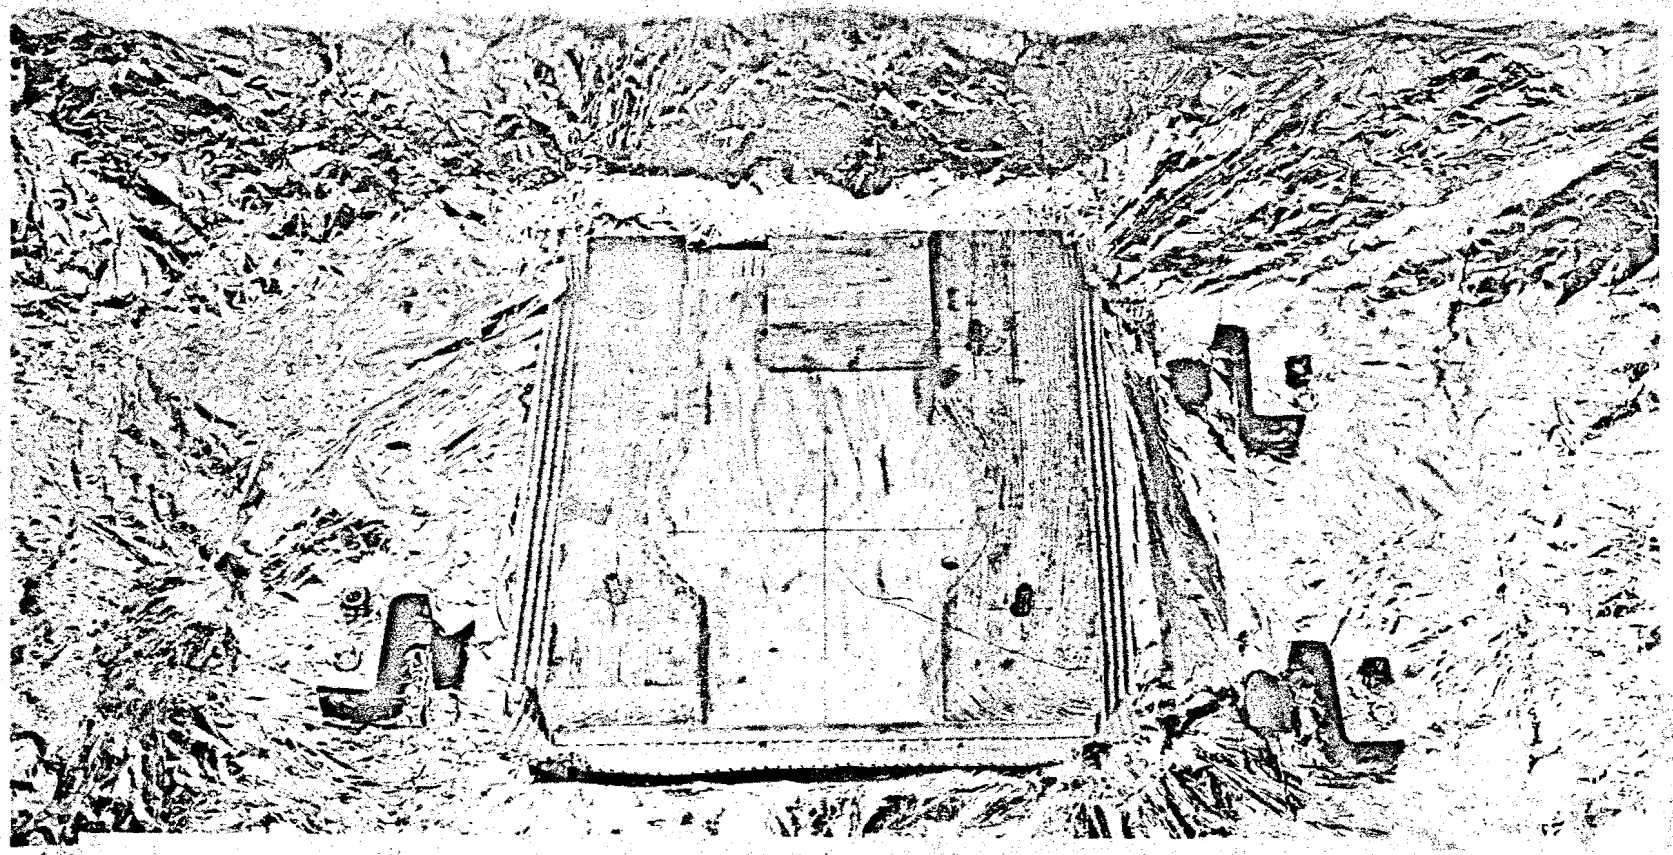


Neg. #26147-2 7/11/55 FRANKFORD ARSENAL ORD CORPS.

PACKAGING OF COMPUTER ASSEMBLY - Prepared Base

FIGURE 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

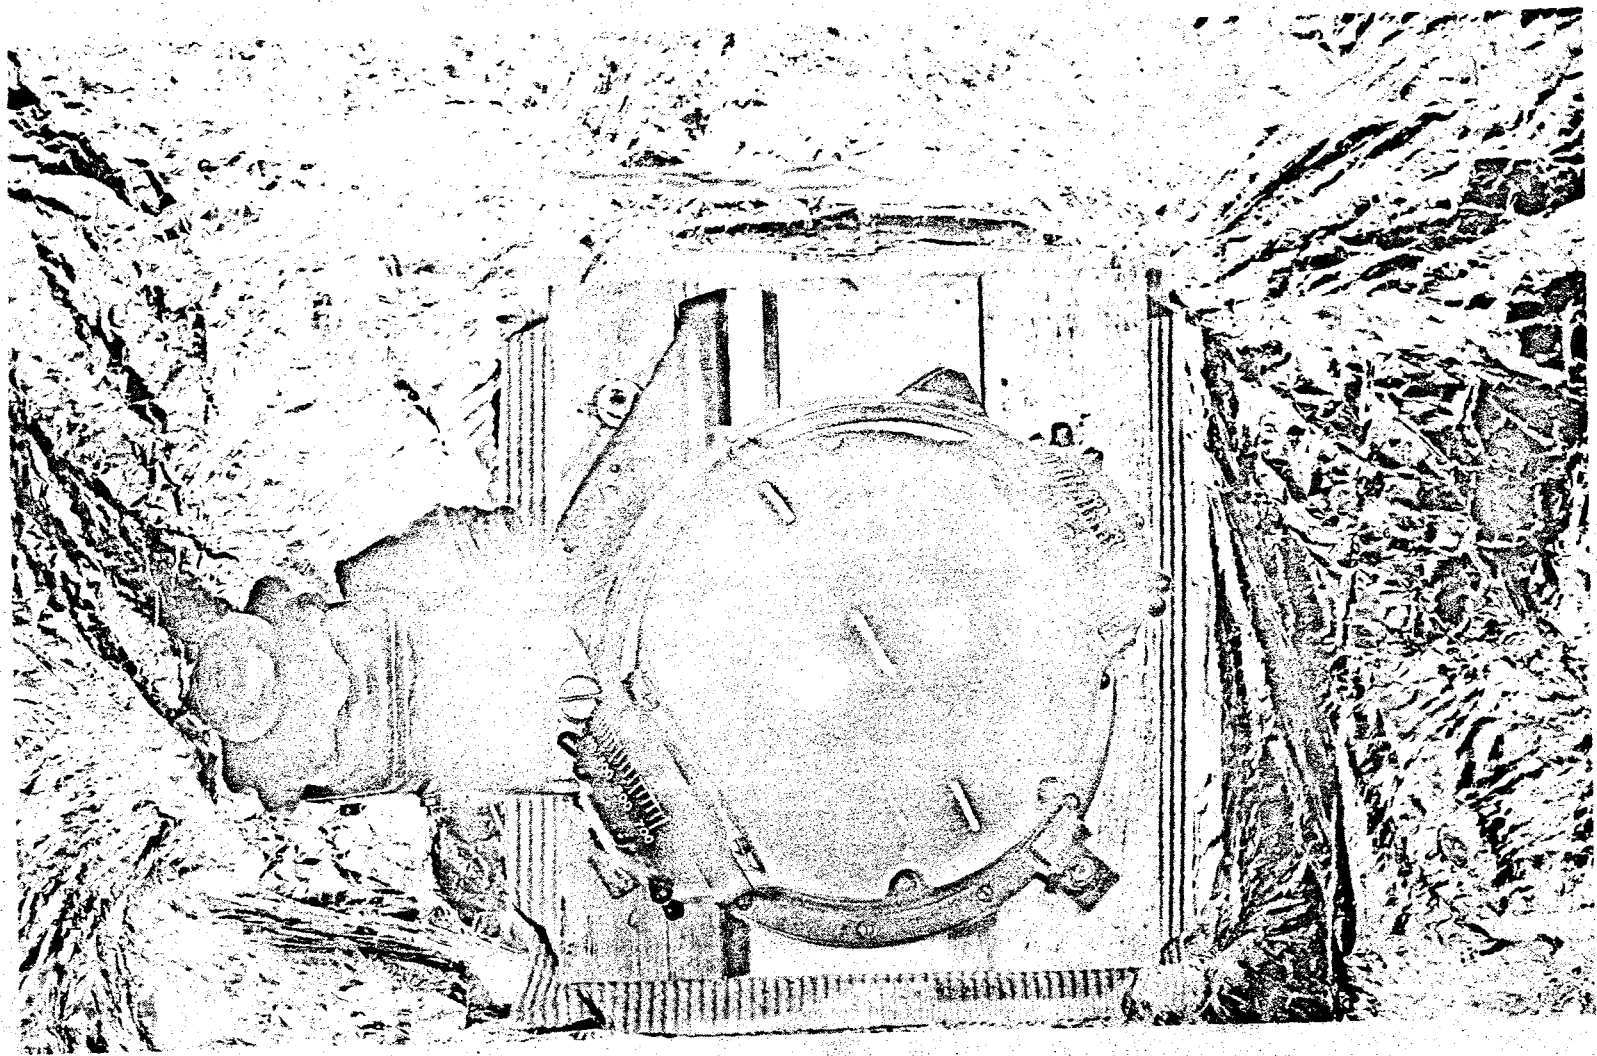


Neg. #26147-3 7/11/55 FRANKFORD ARSENAL ORD CORPS.

PACKAGING OF COMPUTER ASSEMBLY - Computer Mounted on Base

FIGURE 5


Source: https://assist.dla.mil - Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

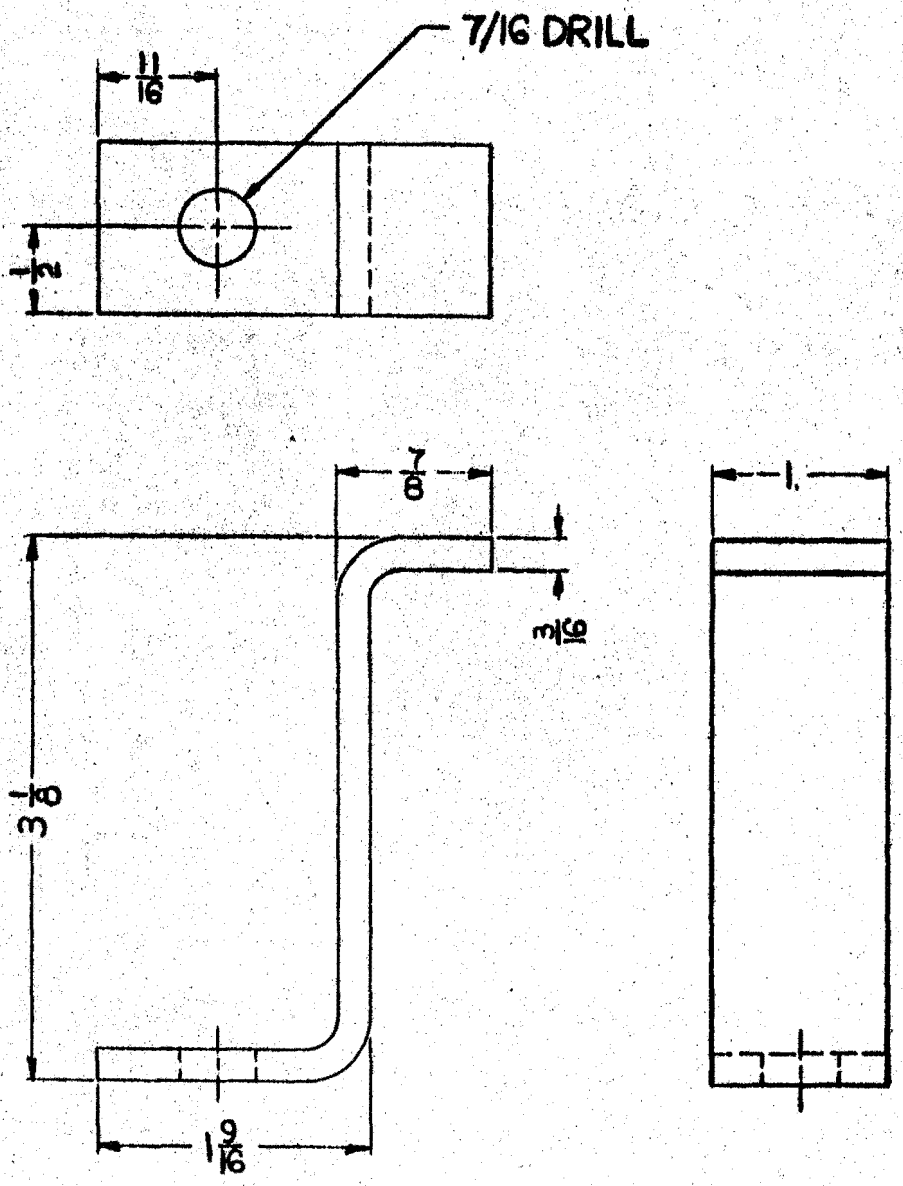

DEVELOPED LENGTH = 5 15/64

FIGURE 6
PACKAGING OF COMPUTER ASSEMBLY
IRON CLAMP

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

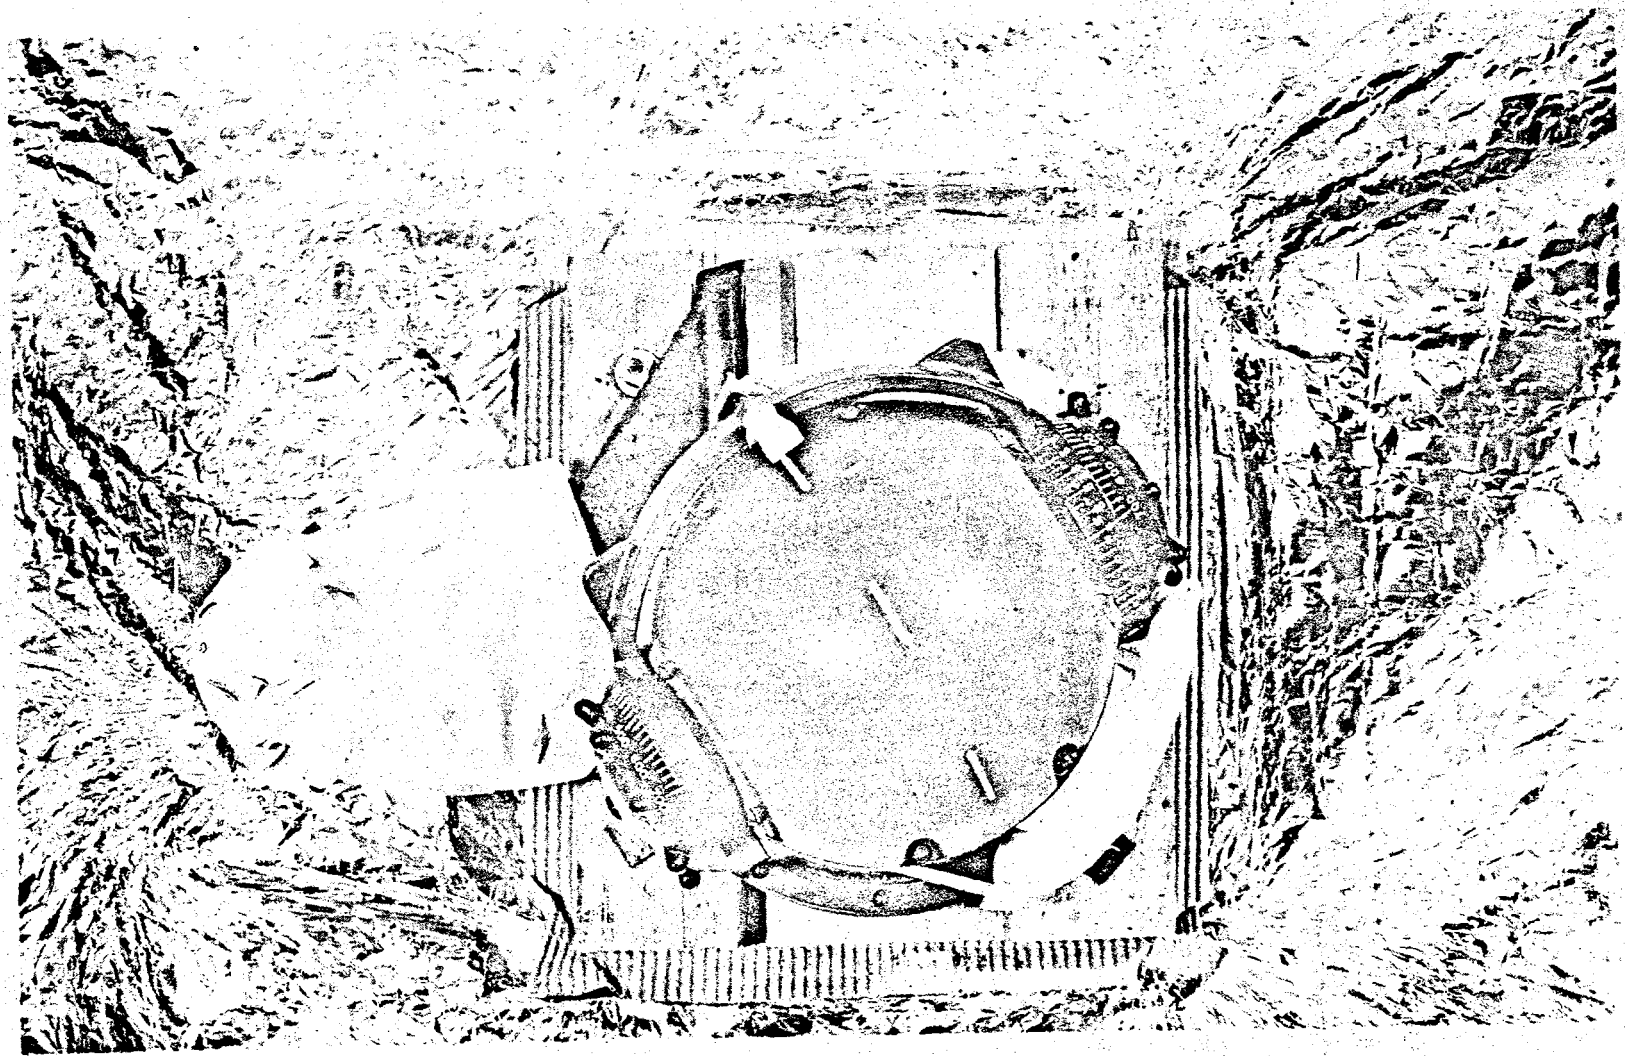

Neg. #26147-4 7/11/55 FRANKFORD ARSENAL ORD CORPS.

PACKAGING OF COMPUTER ASSEMBLY - Ready for Inclosure in Barrier
FIGURE 7


Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.



Neg. #26147-5 7/11/55 FRANKFORD ARSENAL ORD CORPS.

PACKAGING OF COMPUTING SIGHT - Inclosed in Barrier
FIGURE 8

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

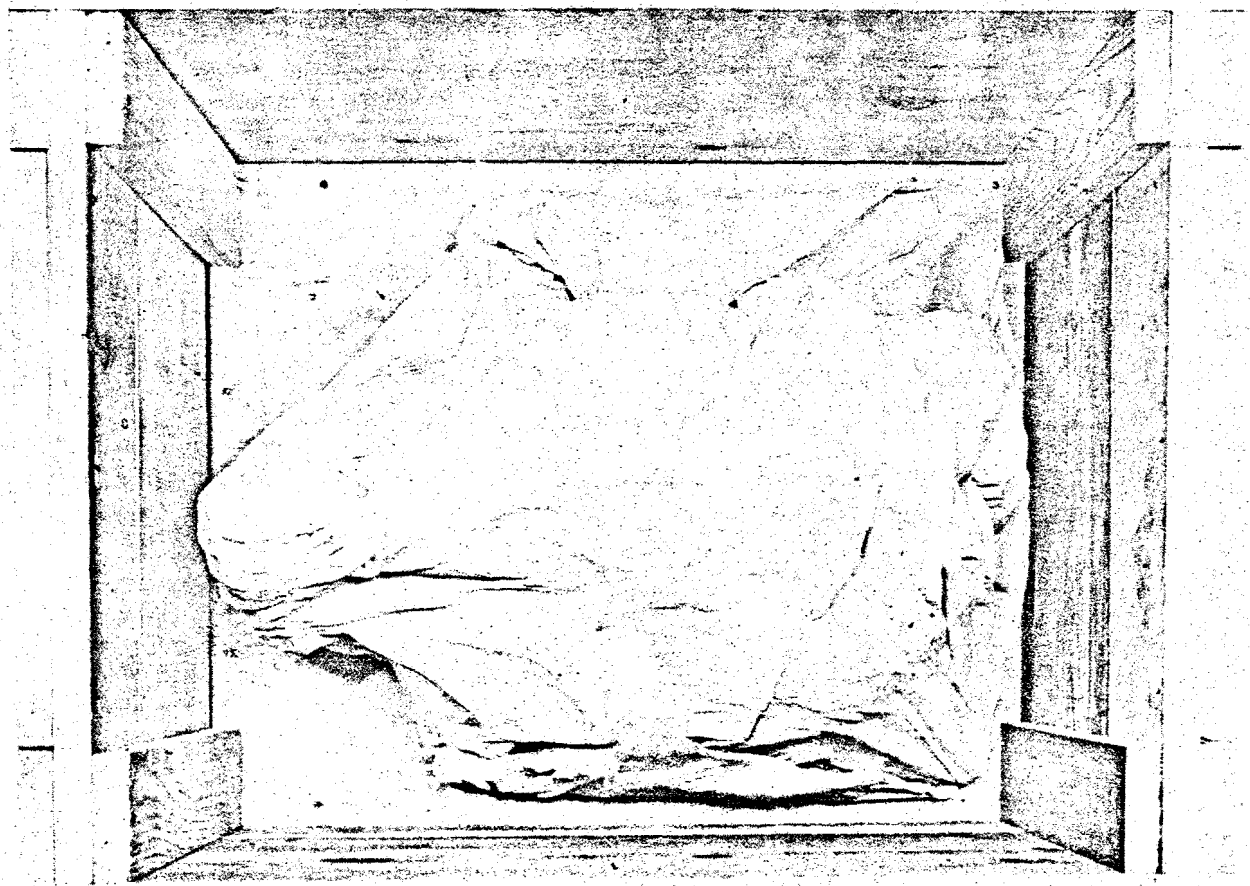

Neg. #26147-6 7/11/55 FRANKFORD ARSENAL ORD CORPS.

PACKAGING OF COMPUTING SIGHT - Immobilized in Shipping Container
FIGURE 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.