MILITARY SPECIFICATION

PARTS, EQUIPMENT AND TOOLS FOR ARMY
MATERIEL, PACKAGING OF

This specification is approved by Army Tank-Automotive Materiel Readiness Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification provides the general requirements for packaginng of parts, equipment and tools for Army materiel.

1.2 Precedence. In case of conflict between documents, the following shall be the order of precedence:

a. Contract
b. Detailed packaging document
c. This specification

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS
Federal

O-E-760	-	Ethyl Alcohol (Ethanol) Denatured Alcohol Proprietary Solvent and Special Industrial Solvents.
P-D-680	-	Dry Cleaning Solvent.
TT-T-291	-	Thinner Paint, Volatile Spirits (Petroleum-Spirits).
UU-C-282	-	Chipboard.
UU-P-533	-	Paper Wrapping, Tissue.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Tank-Automotive Materiel Readiness Command by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

VV-L-800	-	Lubricating Oil, General Purpose, Preservative, (Water-Displacing Low Temperature).
CCC-C-440	-	Cloth, Cheesecloth, Cotton, Bleached and Unbleached.
JJJ-C-561	-	Cotton, Sterile (Purified) and Nonsterile.
MMM-A-250	-	Adhesive, Water-Resistant, (For Sealing Fiberboard Boxes).
NNN-P-40	-	Paper, Lens Tissue.
PPP-B-20	-	Bags, Cotton, Mailing.
PPP-B-26	-	Bag, Plastic (General Purpose).
PPP-B-566	-	Box, Folding Paperboard.
PPP-B-585	-	Box, Wood, Wirebound.
PPP-B-591	-	Box, Fiberboard, Wood-Cleated.
PPP-B-601	-	Box, Wood, Cleated-Plywood.
PPP-B-621	-	Box, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Shipping, Fiberboard.
PPP-B-640	-	Box, Fiberboard, Corrugated, Triple-Wall.
PPP-B-665	-	Box, Paperboard, Metal Edged and Components.
PPP-B-676	-	Box, Setup.
PPP-B-1364	-	Box, Shipping, Corrugated Fiberboard, High Strength, Weather Resistant, Double Wall.
PPP-C-96	-	Can, Metal 28 Gage and Lighter.
PPP-C-650	-	Crate, Wood, Open and Covered.
PPP-D-700	-	Drum, Shipping, and Storage, Metal, 55 Gallon (for Acid and Corrosive Liquids)
PPP-D-705	-	Drum, Metal Shipping, Steel, (Over 12 and Under 55 Gollon).
PPP-D-723	-	Drum, Fiber.
PPP-D-729	-	Drum, Shippig and Storage, Steel, 55 Gallon.
PPP-F-320	-	Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-P-291	-	Paperboard, Wrapping, Cushioning.
PPP-P-704	-	Pails; Shipping, Steel (1 thru 12 Gallon).
PPP-S-30	-	Sack, Shipping, Paper (Cushioned or Reinforced).
PPP-T-42	-	Tape, Packaging/Masking, Paper.
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.
PPP-T-60	-	Tape; Packaging, Waterproof.
PPP-T-76	-	Tape, Pressure-Sensitive Adhesive Paper, Water Resistant (For Carton Sealing)

Military

MIL-C-104	-	Crate, Wood; Lumber and Plywood Sheathed, Nailed and Bolted.
MIL-P-116	-	Preservation, Methods of.
MIL-B-117	-	Bag, Sleeve and Tubing - Interior Packaging.
MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-P-130	-	Paper, Wrapping, Laminated and Creped.
MIL-B-197	-	Bearings, Anti-Friction, Associated Parts and Sub-Assemblies; Packaging of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

MIL-C-372 - Cleaning Compound, Solvent (for Bore of Small Arms and Automatic Aircraft Weapons).
MIL-P-3420 - Packaging Materials, Volatile Corrosion Inhibitor Treated, Opaque.
MIL-C-3774 - Crate, Wood; Open 12,000 and 16,000 pound Capacity.
MIL-C-3955 - Can, Fiber, Spirally Wound.
MIL-C-5501 - Cap and Plug, Protective, Dust and Moisture.
MIL-D-6054 - Drum, Metal-Shipping and Storage.
MIL-I-8574 - Inhibitor, Corrosion, Volatile, Utilization of.
MIL-Q-9858 - Quality Program Requirements.
MIL-G-10924 - Grease, Automotive and Artillery.
MIL-C-15074 - Corrosion Preventive, Fingerprint Remover.
MIL-P-17667 - Paper Wrapping, Chemically Neutral (Non Corrosive).
MIL-B-17757 - Box, Shipping, Fiberboard, (Modular Sizes).
MIL-B-26195 - Box, Wood-Cleated, Skidded, Load-Bearing Base.
MIL-B-40030 - Drum, Plastic, Molded Polyethylene.
MIL-C-40129 - Cloth, Cotton, Batiste, Polishing.
MIL-B-43666 - Box, Shipping Consolidation.
MIL-I-45208 - Inspection System Requirements.
MIL-P-46046 - Preservative Fluid, Automotive Brake System and Components.
MIL-P-46093 - Primer Coating, Synthetic (for Brake Drums).

STANDARDS

Federal

FED-STD-101 - Preservation, Packaging and Packing Materials, Test Procedures.
FED-STD-356 - Commercial Packaging of Supplies and Equipment.

Military

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-147 - Palletized and Containerized Unit Loads.
MIL-STD-647 - Packaging Standards, Preparation and Use of.
MIL-STD-1186 - Cushioning, Anchoring, Bracing, Blocking, and Waterproofing; with Appropriate Test Methods.
MIL-STD-1187 - Standard Size Unit, Intermediate and Exterior Containers for Modular Packaging and Unitization on the 40" X 48" Pallet.

HANDBOOKS

Military

TM 38-230 - Preservation, Packaging and Packing of Military Supplies and Equipment Preservation and Packaging (Vol 1 and Vol 2) Also designated as: DSAM 4145.2 Vol. 1, NAVAIR 15-01-1 AFP 71-4 Vol 1, MCC P4030.31.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

MIL-HDBK-53 - Quality and Reliability Assurance Handbook (Guide for Sampling Inspection).
MIL-HDBK-304 - Military Standardization Handbook Packaging Cushioning Design.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publication. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Headquarters United States Army Materiel Development and Readiness Command

AMCR - 746 - 2 - AMC Regulation Marking, Packing and Shipment of Supplies and Equipment.

3. REQUIREMENTS

3.1 Detailed packaging documents. General supplies shall be packaged for shipment and storage in accordance with the detailed requirements of packaging data sheets, packaging standards, master packaging sheets.supplemental listings of packaging data, and as specified herein.

3.2 Methods and materials. The methods and materials used in the cleaning, preservation and packaging of items shall be in accordance with the material specifications, packaging standards, detailed packaging data sheets, master packaging sheet, MIL-P-116 and as specified herein. When approved by the procuring activity, substitute methods and materials which provide equal or greater protection, at no increase in price to the Government, may be used.

3.2.1 Re-use of used packaging materials. Used packaging and packing materials such as barriers, wraps, bags, cushioning, dunnage, blocking, bracing and containers may be re-used providing they meet the applicable requirements of MIL-P-116 including all verification and test.

3.3 Cleaning, drying and preservation application.

3.3.1 Levels A and B. Cleaning, drying and preservation for Levels A and B shall be in accordance with 3.3.1.1 through 3.3.1.3.12 (see 6.1).

3.3.1.1 Cleaning. Items shall be cleaned and dried as specified in the packaging standards, detailed packaging data sheets or master packaging sheet and the applicable requirements specified herein. When a cleaning process is not specified for Level B the items shall be cleaned in accordance with procedures specified for Level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.3.1.1.1 Brake system components. Cleaning shall be in accordance with Process C-1 and dried by one or more drying procedures of MIL-P-116 except that processes incorporating petroleum base solvents shall not be used on interior parts of the air, vacuum or hydraulic brake systems.

3.3.1.1.2 Impregnated items. Oil and graphite impregnated items shall be cleaned by wiping with a cloth moistened with solvent conforming to P-D-680 or thinner conforming to TT-T-291. Quantity of solvent applied to the cloth shall be limited to avoid dissolving impregnated lubricants.

3.3.1.1.3 Complex items. Items requiring interior cleaning shall be completely drained of all entrapped cleaning fluid.

3.3.1.1.4 Anti-friction bearings. The bearings shall be cleaned in accordance with MIL-B-197, as specified in detailed packaging data sheet, packaging standards or master packaging sheets. Sealed and pre-lubricated bearings, when known to be lubricated or preserved, or combination of both, in accordance with requirements of MIL-B-197, shall be cleaned externally as specified in 3.3.1.1.3; and finger prints neutralized by wiping with a clean, lint free, cloth moistened with finger print remover conforming to MIL-C-15074, followed by wiping all surfaces with solvent conforming to P-D-680.

3.3.1.1.5 Burned powder removal. All items which have been exposed to burned powder residues shall be cleaned by the use of a dry cleaning solvent conforming to P-D-680, then scrubbed with a nonmetallic bristle brush saturated with cleaning compound conforming to MIL-C-372, followed by a rinse in clean petroleum solvent and allowed to drain.

3.3.1.1.6 Optical elements and assemblies.

3.3.1.1.6.1 Cleaning materials and equipment. The following materials and equipment shall be used in the cleaning of optics:

Materials and equipment	Specification
Alcohol, ethyl (Ethanol)	Grade I of O-E-760
Bottle, glass, 4 ounce	----------
Brush, camel hair	----------
Cloth, cotton cheesecloth	CCC-C-440
Cloth, cotton, batiste	MIL-C-40129
Cotton, absorbent	Grade A, Class I, JJJ-C-561
Paper, lens tissue	NNN-P-40
Sticks, orange or equal	----------
Syringe, rubber	----------

3.3.1.1.6.2 Cleaning operations. Exposed surfaces of optical elements or assemblies shall be cleaned in the following manner:

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

a. Loose particles of dust shall be removed from the surface of the optic with a camel hair brush.
b. The surface to be cleaned shall be wiped with a circular motion using cotton, lens paper or freshly laundered cheese cloth which has been saturated with alcohol. Drying shall be by wiping with clean cotton, lens paper or freshly laundered cheese cloth. CAUTION: Only lens tissue paper or batiste cloth shall be used to clean plastic lens elements. (NNN-P-40 lens tissue Type II ordType III shall not be used for plastic).
c. A swab shall be made by wrapping one piece of lens tissue paper around the end of an orange stick or equal. One or two drops of alcohol shall be added on the tip of the swab. The swabbing operation shall begin at the center of the polished surface. A light downward pressure shall be exerted on the swab and with a circular motion gradually increase the radius of area being cleaned until the entire surface has been swabbed. This operation shall be repeated until no trace of dirt, lint, or smears are perceptible.
d. A rubber syringe shall be used as a bellows to remove any residual dust or lint that may remain on the cleaned surface.
e. Immediately after cleaning, the optics shall be wrapped with lens tissue paper conforming to NNN-P-40, or covered with a plastic fungus resistant cap-plug conforming to MIL-C-5501.

3.3.1.1.7 Recoil, equilibrator, buffer cylinders, and gun tubes. Unless otherwise specified (see 6.1), painted surfaces shall be cleaned in accordance with Process C-1 and unpainted surfaces in accordance with Process C-3 of MIL-P-116. Interior surfaces shall be cleaned additionally in accordance with Process C-8 of MIL-P-116.

3.3.1.1.8 Nonmetallic items. Unless otherwise specified (see 6.1), items such as rubber, leather and cork shall be cleared in accordance with Process C-1 of MIL-P-116.

3.3.1.1.9 Prepacking. MIRCOM purchased items such as missile components, hydraulic lines, valves, fittings, and special system components used with liquid oxygen fuels and pneumatic systems shall be prepackaged immediately after cleaning in heat sealed bags conforming to MIL-B-117.

3.3.1.2 Drying. Immediately after cleaning, item shall be thoroughly dried by the specified procedure. When a drying procedure is not specified, the item shall be dried by the most applicable procedure of MIL-P-116. When procedure D-1 or D-4 is used as a cleaning process, drying is not required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.3.1.3 Preservative application. Immediately after cleaning and drying, a continuous coating of the specified contact preservative shall be applied to unpainted metal surfaces by one or more of the applications as specified in MIL-P-116. Coating requirements shall be in accordance with the applicable preservative specification as referenced in packaging standards or detailed packaging data sheets; except, that in lieu of the preservative specificatio referenced in packaging standards, the requirements in 3.3.1.3.1 through 3.3.1.3.12 shall apply to the specific items and for the conditions as stated therein.

3.3.1.3.1 Partially painted or combination metallic nonmetallic parts. Unless otherwise specified (see 6.1), preservatives specified in the packaging standards, detailed packaging data sheets or master packaging sheets shall be applied only to the unpainted, unplated ferrous metal surfaces of partially painted or plated parts.

3.3.1.3.2 Nonferrous and plated items. Preservatives specified in the packaging standards, detailed packaging data sheets or master packaging sheets shall not be required on exterior parts that are completely nonferrous, gold plated, silver plated, cadmium plated, zinc plated, tin plated or stainless steel. Coatings such as phosphate are not included in this exception.

3.3.1.3.3 Brake and clutch components. Interior of brake drums, brake disk, calipers, shoes, and related bare ferreous metal parts shall be coated with primer, conforming to MIL-P-46093 in lieu of other specified preservatives. Clutch disk and pressure plate shall be coated with the same type primer. Application on nonmetallic parts shall be held to an absolute minimum. The primer coating covered by this specification is intended for application to a dry film thickness between 0.0004 and 0.0006 inch on metal surfaces. The preferred method of applying this primer is by spraying, which will assure the desired film thickness and performance of primer to the specification.

3.3.1.3.4 Hydraulic brake system and components. Wheel cylinders, master cylinders, and related metal components shall be coated with preservative conforming to MIL-P-46046 in lieu of other specified preservatives.

3.3.1.3.5 Operational lubricants and hydraulic oils and fluids. When a preservative is specified for an item and it is known that the item to be packaged, operates in a lubricant or hydraulic oil or fluid that is other than that specified, except the hydraulic brake system, (see 3.3.1.3.4), the item shall be preserved with the same operational lubricant or oil. When the operational lubricant or oil cannot be determined, only those preservatives compatible with the item shall be used.

3.3.1.3.6 Volatile corrosion inhibitor (VCI). When VCI is specified in the packaging standards or detailed packaging data sheets, the VCI shall be used and applied in accordance with MIL-I-8574. The size of carrier applied to the unit quantity shall be computed as specified for "intimate single wrap" (see 3.4.1.1.1.1) and applied as the intimate wrap. When the unit quantity of an item occupies one half or less of the minimum size bag (2-1/2 by 3 inches)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

the VCI carrier size shall be a 4 by 2 inch sheet folded one half its length. The unit quantity shall be placed between the folds with the treated side next to the part and inserted into the specified bag.

3.3.1.3.7 Impregnated items. Unless otherwise specified (see 6.1), oil impregnated metallic items shall be coated with preservative oil conforming to VV-L-800. Preservatives shall not be applied to graphite impregnated items.

3.3.1.3.8 Complex items. Items requiring interior preservation application shall be sloshed, sprayed, or dipped, as applicable, with the specified preservative oil, as prescribed in the detailed packaging data sheet, packaging standards or master packaging sheets. Preservation shall be applied in such a manner to insure complete coverage of both interior and exterior surfaces. The preservative shall be thoroughly drained to avoid possible entrapment of preservative that could subsequently damage the package. In addition, if item cannot be sealed by design features, openings shall be sealed with caps or plugs, conforming to MIL-C-5501, or with tape conforming to Class 1 of PPP-T-60, Type III or IV.

3.3.1.3.9 Anti-friction bearings. The bearings shall be preserved in accordance with MIL-B-197, as specified in the packaging standards, detailed packaging data sheets or master packaging sheets. Sealed and prelubricated bearings, when lubricated or preserved in accordance with MIL-B-197, shall have exterior surfaces preserved with the same preservative or lubricant.

3.3.1.3.10 Rubber and synthetic rubber items. When rubber or synthetic rubber items are unit packaged in quantities of more than one, the individual pieces shall be dusted with technical talcum (soapstone), conforming to commercial standard, in powder form, or shall be separated by draft or plastic film separators.

3.3.1.3.11 Items with grease fittings. Unless otherwise specified (see 6.1), items such as universal joints and flexible cables that are equipped with grease fittings (zerk) or tapped holes for such fittings shall be preserved (pressure filled) with grease conforming to MIL-G-10924.

3.3.1.3.12 Supplemental oil reapplication. When the engineered drawing or other technical instruction require a supplementary oil finish to metals with phosphate and black oxide coatings, the same supplementary oil shall be re-applied after cleaning unless otherwise specified in packaging standards or detailed packaging data sheet.

3.3.2 Commercial. Cleaning, drying, and preservative application shall be in accordance with Fed. Std. No. 356.

3.4 Unit pack. Unit pack shall be Level A or B as specified (see 6.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.4.1 Level A.

3.4.1.1 Unit pack quantity. Each item, in the quantity specified shall be packed in accordance with the applicable packaging standard, detailed packaging data sheet or master packaging sheet and the applicable requirements specified herein. Flexible, coilable items constructed in a loop, such as fan belts, and having a 14 inch diameter or greater, shall be looped in an odd number of loops so as not to distort or otherwise damage the item. Items shall not be looped if undue strain or damage will occur. Items that are practical to roll or fold shall be rolled or folded to the minimum cube that will not damage the item.

3.4.1.1.1 Intimate wrap. When a multiple quantity is specified to be wrapped in a unit pack, individual pieces weighing more than 1/4 pound, or fragile items, shall be individually wrapped. When the individual item weighs 1/4 pound or less, and is not considered to be fragile, the entire specified multiple quantity shall be included in only one wrap. Arrangement of multiple quantities within the wrap shall be in such a manner as to provide minimum cube.

3.4.1.1.1.1 Intimate wrap size. When size is not specified, length and width shall be determined in accordance with Table I, except that the minimum size shall be 3 by 3 inches.

3.4.1.1.1.1.1 Intimate neutral wraps. When greaseproofness (no contact preservative) is not a requirement and barrier material conforming to MIL-B-121, Type II, Grade A, Class 2 is specified in the contract or packaging document as an intimate wrap, neutral papers conforming to MIL-P-17667, MIL-P-130 and Type II of UU-P-553 may be used as a substitute providing they meet the compatability requirements of MIL-P-116.

3.4.1.1.2 Cushioning blocking and bracing. When cushioning, blocking and bracing is required but not specified, application shall be in accordance with MIL-P-116. When cushioning wrap is required and size is not specified, size shall be computed as specified in 3.4.1.1.1.1 for intimate wrap.

3.4.1.1.3 Stiffeners. When stiffeners are required, the unit quantity of the item shall be sandwiched between two pieces of material 1/2 inch larger in length and width than the item or unit quantity. Stiffener material shall conform to UU-C-282 or PPP-F-320 as specified. After positioning the item between the stiffeners, the stiffeners shall be secured with tape conforming to PPP-T-42, PPP-T-45, PPP-T-76 or PPP-T-60. The tape shall not touch the item. Stiffeners shall not be secured in a manner that will exert pressure on items subject to set and distortion. Multiple unit quantities requiring a stiffener shall be placed adjacent to one another when the item is dubject to deformation, such as a preformed material or synthetic rubber seals and gaskets; otherwise, the items may be placed on top of each other in order to minimize cubic displacement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.4.1.1.3.1 Load deflector stiffeners. When an item needs protection from being compressed or otherwise deformed, such as "O" rings and a specific type of stiffener is not specified, such items shall be protected by one of the types of load deflector stiffeners (see figure 1). However, "O" rings with a diameter two inches or less will not require stiffeners. Coiling is permissible, except for "O" rings and gaskets, provided coiling will not deform the item.

3.4.1.1.4 Unit container. Unit container selection and container closure shall be in accordance with Table II. Specific use of container shall be in accordance with MIL-P-116, the applicable container specification selected from Table II.

a. When methods are specified which require fiberboard or paperboard containers within barriers, the corners of containers shall be blunted prior to insertion in the bags or barriers.

3.4.1.1.4.1 Unit container size. Flexible and rigid containers shall be of a size to provide a snug fit for the wrapped and/or cushioned item. The sequence of length, width, and depth for ordering purposes shall be in accordance with the applicable box specification. Unless otherwise specified (see 6.1), when each dimension of an item to be placed in a container is over three inches, an end loading carton shall be used with the longest dimension of the container shown as the depth and the smallest dimension shown as the width. When one or more dimensions of the item is three inches or less and a PPP-B-636 container is used, the style shall be OPF or FPF and the smallest dimension shall be designated as the depth.

3.4.1.1.4.2 Bag size. When size is not specified, determination of bag sizes shall be based on the length, width and depth of the unit quantity wrapped or contained prior to placing within the barrier. Bags shall be of a size calculated as follows:

a. When item depth is 1 inch or less
   1. - Width = Width, plus depth, plus 1/2 inch
   2. - Length = Length, plus depth, plus 1-1/2 inches

b. When item depth is greater than 1 inch and up to and inculding 8 inches.
   1. - Width = Width, plus depth, plus 1 inch
   2. - Length = Length, plus depth, plus 2 inches

c. When item depth exceeds 8 inches
   1. - Width = Width, plus depth, plus 1-1/2 inches
   2. - Length = Length, plus depth, plus 2-1/2 inches

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

Note 1: Minimum size of bag shall be 2-1/2 by 3 inches regardless of formula.

Note 2: After the size has been calulated, extend the dimension of the width to the next nearest inch, except for minimum size of bag.

d. Bag sizes may be adjusted to adequately contain items when automatic packaging equipment is utilized.

3.4.1.1.4.3 Conforming heat sealed bags. Unit packed items using heat sealable bags as the exterior unit container shall have the bags conforming to the configuration of the parts, or container, as applicable, prior to placing the bags into an intermediate container. An exception to this requirement is when stiffeners are used in conjunction with bags, the unit pack shall be placed in the intermediate container without conforming.

3.4.1.1.4.4 Closures. Closures shall be in accordance with the Packaging Standard, Detailed Packaging Data Sheet, Master Packaging Sheet, the applicable container specification and requirements specified herein.

3.4.1.1.4.4.1 Boxes closed with adhesive. When adhesive is used as a closure, for fiber boxes, the adhesive shall be applied over at least 50 percent of the area of contact between flaps of boxes used inside barriers, and over at least 90 percent of the area of contact between flaps of boxes not used in barriers. Adhesive shall conform to specification MMM-A-250.

3.4.1.1.4.4.2 Boxes closed with tape. When closure is made by means of tape, the tape shall be applied as follows:

a. Regular slotted carton (RSC): Two strips shall be applied, one on top seam and one on bottom seam, extending not less than two inches onto each end panel. When the bottom of the container is closed with stapels or adhesive, only a single strip of tape on the top seam is required.
b. One piece folders (OPF): One strip shall be applied on top seam, extending the full depth of end panels and one inch onto bottom panel.
c. Boxes conforming to PPP-B-566, PPP-B-665, and PPP-B-676 shall be closed with tape conforming to PPP-T-42, except when Class 2 of PPP-B-665 is used for Method I and III. The tape shall conform to PPP-T-60, Type III, Class 1. Tape, unless otherwise specified, shall be a minimum of one inch wide and have sufficient length to adequately secure all flaps and lids to sides or bottom, as applicable.
d. When containers conforming to class weather-resistant of PPP-B-636 are specified, tape conforming to PPP-T-60 Type III, Class 1 shall be used. When containers conforming

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

to class domestic of PPP-B-636 are specified, tape conforming to PPP-T-42 shall be used. Tape, unless otherwise specified, shall be two inches in width and applied as specified herein.

e. Full overlap (FOL): Apply tape around the two sides and length of the flap. Provide one inch on flap and one inch on panels.
f. Five panel folder (FPF): Closure shall be by taping all seams adequately, as applicable.

3.4.1.1.4.5 Desiccant application. Desiccant shall be applied in accordance with MIL-P-116 and the applicable packaging data sheet, packaging standard, or master packaging sheet.

3.4.1.2 Intermediate pack. Unit packs shall be packaged in intermediate containers in the quantities specified in the contract or packaging document, and as specified herein. (When an intermediate quantity is not specified in the contract or packaging document, the requirements in 3.4.1.2.1 and 3.4.1.2.2 shall apply for use of intermediate containers and determination of intermediate quantities.)

3.4.1.2.1 Intermediate quantities. Quantities specified in contract or packaging requirements may be varied under the following conditions:

a. When the quantity to be shipped to a single destination is less than the established intermediate quantity, the total quantity shall be placed in a shipping container of a minimum size to contain the pack.
b. When a contract or order specifies a total quantity that is more than the established intermediate quantity, but not in multiples thereof, established quantities shall be packaged in the required number of intermediate containers, and the remaining quantity shall be placed in the smallest container which will accommodate the unit pack.

3.4.1.2.2 Intermediate containers. Intermediate container selection shall be in accordance with the applicable container specification selected from Table II. Except as otherwise specified herein, intermediate container shall be used only under the following conditions:

a. When the exterior surface of the unit pack is a bag or wrap of any kind, regardless of size.
b. When the unit pack volume is less than 64 cubic inches and the exterior unit container is a rigid type.
c. When the quantity to be shipped to a single destination permits the use of two or more intermediate containers in an exterior container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.4.1.2.3 Limitations of intermediate pack. Except as otherwise specified herein, unit packs requiring intermediate packing shall be packed in quantities governed by the following limitations:

a. Maximum of 100 unit packs to the intermediate container.
b. Maximum net load of 40 pounds.
c. Maximum size of 1.5 cubic feet with at least two dimensions not exceeding 16 inches.

3.4.1.2.4 Quantities in intermediate containers. When the quantity of unit packs to be placed in an intermediate container is not specified in the packaging document, Table III will indicate the quantities of unit packs that shall be placed in an intermediate container, based on limitations specified in 3.4.1.2.3.

3.4.1.2.5 Containers. When the contract or order specifies a quantity that is more than twice the established maximum permissible intermediate quantity, the container size shall be selected as applicable from the sizes specified in MIL-STD-1187. The size selected shall be within the tolerance for voids (see 3.4.1.2.5) and, unless otherwise specified, the container size shall be selected as appropriate.

3.4.1.2.5.1 Tolerance for voids. Except for USAMICOM purchases, the void is represented by the dimensional difference between the interior space of the intermediate container and the space occupied by the unit packs. This void shall not exceed the tolerance in any one direction, length, width, or height, as specified in Table IV. The specified tolerance applies to each of the three directions and cannot be added to apply to any one direction.

3.4.1.2.6 Closure. Intermediate container shall be closed as specified in 3.4.1.1.4.4, except that when used, tape shall conform to PPP-T-60, Type III, Class I.

3.4.2 Level B.

3.4.2.1 Requirements. When detailed requirements are not specified in packaging documentation for Level B, packaging shall be in accordance with 3.4.2.2 through 3.4.2.7.

3.4.2.2 Unit pack.

3.4.2.2.1 Bare ferrous items (not painted or plated). Items shall be provided with a single wrap of VCI, treated carrier, conforming to Type I, Class 2, Style B of MIL-P-3420. Carrier shall be placed around the entire quantity contained in the unit pack.

3.4.2.2.2 Ferrous and nonferrous combinations. All items of 2 composite construction, including those which are partially plated or painted, shall be

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

coated with lubricating oil, conforming to VV-L-800 on the bare ferrous surfaces only. When a preservative is applied, the unit quantity shall be wrapped in barrier material conforming to Type II, Grade A, Class 2 of MIL-B-121.

3.4.2.2.3 Completely plated, painted and nonferrous items. All completely plated, painted and nonferrous items, including stainless steel, shall be packed without application of a preservative.

3.4.2.2.4 Items requiring protection from direct contact with water. When the nature of an item to be packaged is such that a contact preservative is not applicable, the quantity of items to be contained in the unit pack shall be wrapped in material conforming to PPP-B-1055, or MIL-B-121. Wrap shall be arranged on or around the items in a manner that will prevent free water (rain and melting snow) from entering directly into the interior of the pack.

3.4.2.3 Unit pack quantities. Unit pack quantities shall be the same as specified for Level A (see 3.4.1.1).

3.4.2.4 Unit container. Unit container selection shall be in accordance with the applicable container specification selected from Table II. Closure shall be in accordance with 3.4.1.1.4.4.

3.4.2.5 Unit pack bags. When a bag is used to attain waterproofness (see 3.4.2.2.4), the bags shall conform to the material and sealing requirements of MIL-B-117.

3.4.2.6 Cushioning. Items shall be cushioned within the pack to prevent damage which would result from movement of the items within the package.

3.4.2.7 Alternate unit packs. Alternate packaging materials and procedure proposed for acceptance in lieu of those specified above shall be submitted to the procuring activity for approval prior to use.

3.4.2.8 Intermediate packing. Intermediate packing for Level B shall be the same as Level A.

3.4.3 Commercial. Interior packing shall conform to Fed. Std. No. 356.

3.5 Packing. Packing shall be Level A, B, or Commercial as specified (see 6.1)

3.5.1 Level A.

3.5.1.1 Skidded containers. All shipping containers, with gross weights of more than 200 pounds and containers with length and width dimensions of 48 by 24 inches (1,200 X 600 MM) or more, weighing more than 100 pounds will be provided with skids, minimum size nominal 3 X 4 inch lumber laid flat, or in accordance with the applicable container specification to facilitate ease of handling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.5.1.2 Minimum container size. The minimum size of the exterior container shall be three cubic feet, with the following exceptions:

a. When the maximum gross weight precludes the use of the minimum size box, the size shall be governed by the quantity of the item which most nearly approximates the maximum gross weight.
b. When the total quantity of a line item to be shipped to a single destination displaces less than 3 cubic feet, the exterior container will be the size necessary for the shipment. If more than one line item is involved, those items whose cube is less than 3 cubic feet and whose weight is less than 200 pounds will be consolidated in multipacks to the fullest extent practicable.

3.5.1.3 Shipping container. Exterior shipping container shall be new or used as specified in 3.2.1 and of a minimum size to contain the packs. Unless otherwise specified, exterior container shall be in accordance with the applicable specification selected from Table V. Container size should conform to the maximum extent possible to those listed in MIL-STD-1187.

3.5.1.4 Closure. Closure of the exterior container shall be in accordance with the appendix to the applicable container specification.

3.5.1.5 Strapping exterior containers. Strapping of containers shall be in accordance with the applicable container specification with the following exceptions:

a. Conus shipments (does not include oversea shipments through ocean or air terminals).
b. Shipments through a consolidation depot or from one consignor to one consignee in MILVANS or SEAVANS.
c. Container of a palletized unit load.

3.5.1.6 Parcel post shipments. Parcel post shipments shall meet all requirements specified in parcel post rules and regulations. Containers for parcel post shipments shall conform to the following specifications as applicable:

PPP-B-636	-	Box Shipping, Fiberboard.
PPP-S-30	-	Sack, Shipping, Paper (Cushioned).
MIL-C-3955	-	Can, Fiber, Spirally Wound.

3.5.1.7 Multipacks. Multipacks shall be exterior containers used to consolidate shipments of two or more assorted items to a single destination when the total quantity of each item displaces less that three cubic feet. This does not include items packed in exterior containers prior to the time for shipment. A cover shall be fastened to the container to prevent pilferage or loss

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

of the inclosed packages. The total quantity of the same line items (unit and intermediate packs) shall be positioned during packing to permit ready identification upon opening, or shall be consolidated by means such as bagging, tying, bundling, wrapping and cartonizing then identified before being placed in a multipack container. Multipacks weighing over 200 pounds or over 20 cubic feet shall be provided with skids to facilitate handling. Multipack containers shall conform to the requirements of the applicable container specification. Containers listed in 3.5.1.3 shall be utilized for multipacks.

3.5.2 Level B. Containers selection shall be in accordance with the applicable container specification selected from Table V.

3.5.2.1 Container selection. The container selected shall be in accordance with the weight limitations established by this specification for the specific container Style, Type, Class, Grade, Size and variety used. Alternate containers proposed in lieu of those specified herein shall be submitted to the procuring activity for approval to use. All shipping containers with gross weights of more than 200 pounds and with length and width dimensions of 48 by 24 inches (1200 X 600 MM) (or more) weighing more than 100 pounds will be provided with skids minimum size nominal 3 X 4 inch lumber laid flat, or in accordance with the applicable container specification.

3.5.2.2 Multipacks. Requirements for multipack shall be the same as specified for Level A except that the containers selected shall be in accordance with the applicable container specification specified for Level B in Table V. When multipacks are unitized, low cost expendable pallets (see 3.5.3.2) may be used.

3.5.2.3 Parcel post shipments. Containers shall be capable of meeting postal regulations. Cloth mailing bags conforming to PPP-B-20 are permissible for unbreakable items provided projections are cushioned to prevent rupture of the bag during shipment. Flat items may be shipped positioned between sheets of material conforming to PPP-F-320 with the sides stapled or taped. Parcel post containers, when closed with PPP-T-45 tape, may be shipped outside the continental United States.

3.5.3 General requirements.

3.5.3.1 Palletization of containerized unit loads. When specified, material shall be palletized in accordance with MIL-STD-147. Palletization shall be used to the greatest extent possible where volume of homogeneous commodities for shipment are destined for a CONUS or overseas destination. Palletization shall be accomplished in accordance with the criteria in 3.5.3.2.

3.5.3.2 Criteria for unitization and consolidation. The following factors shall be used in determining the feasibility and requirements for unitization and consolidation:

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

a. Palletized loads. When four or more exterior shipping containers, except containers skidded in accordance with 3.5.1.1, are being shipped to the same distribution point or destination, which will provide a pallet load utilizing at least 85 percent of the pallet base to a minimum height of 35 inches, including height of pallet and shall not exceed a height of 41 inches maximum.

b. Commercial expendable pallet. Commercial expendable pallets, 40" X 48" (4 way), may be used in lieu of those specified in MIL-STD-147 provided that the weight capacity of the pallet selected is adequate for load and the gross weight of palletized load does not exceed 1,500 pounds.

3.5.4 Commercial. Packing shall conform to the requirements of Fed. Std. No. 356.

3.6 Marking.

3.6.1 General. Marking for Level A and B shall be in accordance with MIL-STD-129. When the Level B unit pack and exterior packs are the same as specified for Level A the packs shall be marked Level A. Marking for commercial shall be in accordance with Fed. Std. No. 356.

3.6.1.1 Advertising matter and case markings. Advertising matter and case markings shall be in accordance with MIL-STD-129.

3.6.2 Shelf life codes. When specified (see 6.1) shelf life codes shall be marked on unit, intermediate and exterior containers in accordance with MIL-STD-129, as applicable. Procedures pertaining to the identification, control and utilization of Shelf-Life items may be found in AR-700-89.

3.7 First article inspection. Unless otherwise specified (see 6.1) the first article pack furnished under this specification shall be a pack that has been inspected and has passed the first article inspection and tests specified herein (see 4.3). The first article pack will not be required when such a pack has previously been inspected, tested and accepted for the same method for a similar item by the same contractor, and satisfactory evidence can be furnished to the Government that the equipment or items have been prepared identically with the previously approved pack. First article inspection and tests shall be repeated when changes in preservation, packaging, and packing materials, or processes or design are made.

3.8 Workmanship. Workmanship shall be such that will provide adequate protection against deterioration and physical damage to the item being packaged and packed under this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Written description. Unless otherwise specified in the contract or purchase order, the contractor shall provide and maintain an effective packaging quality assurance system acceptable to the Government. A current written description of the system shall be submitted the Government Quality Assurance representative prior to initiation of production packaging. The written description shall be considered acceptable when as a minimum, it provides the quality assurance required by this specification and other applicable documents. When the contract or purchase order does not require Government approved written description, the quality assurance provisions of this specification shall apply.

4.2 Government verification. All quality assurance operations performed by the contractor shall be subject to Government verification at unscheduled intervals. Verification shall consist of (a) surveillance of the operations to determine that the practices, methods, and procedures of the written inspection plan are being properly applied, and (b) Government packaging inspection to measure the quality of the packs offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices, shall be immediately called to the attention of the contractor. Failure of the contractor to promptly correct the deficiencies discovered shall be cause for suspension of acceptance until correction has been made. To avoid interference with operations, the contractor shall designate a responsible official or officials to whom the Government will report such instances.

4.3 First article inspection. Unless otherwise specified (see 6.1), the contractor shall submit one first article pack of the item being procured. The pack shall be made utilizing the same materials, equipment and methods of packaging and packing proposed for use in subsequent production packaging. First article inspection shall be performed by the contractor and shall consist of the examination, and the first article tests specified in the contractor's written description or by the examination specified in 4.4.2 and 4.4.3 and tests specified in 4.6. The Government representative shall be given at least five days notice of the time and place of first article inspection. Examination and tests shall be subject to surveillance inspection by the Government. The contractor shall furnish the Government inspector a written report of the first article inspection listing all examinations and tests and the results thereof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

The first article inspection report shall require Government approval prior to the start of production packaging. The approved first article pack and the first article inspection report shall be used as the production standard.

4.3.1 Failure. Failure of the first article pack to pass the examinations and tests of the contractor's written description, or by the examinations and tests specified in 4.4.2, 4.4.3 and 4.6 shall be cause for rejection. Evidence shall be provided by the contractor that corrective actions have been taken to eliminate the condition which caused rejection.

4.4 Quality conformance inspection.

4.4.1 Materials. Except for materials which have been Government inspected at the source, all materials to be used in the packaging shall be inspected in accordance with the applicable material specification; or certified inspection and laboratory test reports shall be furnished which show that material, as furnished, conforms to the detailed specification.

4.4.2 Packaging inspection. Packaging inspection shall be performed by the contractor and shall consist of the inspection and quality conformance test specified in the applicable Packaging Inspection Provisions A through R.

4.4.2.1 Lot-by-lot inspection.

4.4.2.1.1 Lot formation. A lot shall consist of all the packaging of items having the same stock number and from an identifiable packaging period and submitted at one time for inspection.

4.4.2.1.2 Sampling for examination. Sampling for examination shall be in accordance with MIL-STD-105, using a single sampling plan. Acceptance or rejection shall be based on the classification of defects and Acceptable Quality Level (AQL) specified in the applicable Packaging Inspection Provisions.

4.4.2.1.3 Sampling for tests. From each lot that has passed the examination specified in 4.4.2.1.2, a representative sample shall be selected in accordance with inspection level S-4 of MIL-STD-105. Acceptance or rejection shall be based on an AQL of 4.0 percent defective. The samples selected shall be subjected to the quality conformance tests specified in the applicable Packaging Inspection Provisions.

4.4.3 Packing inspection. Packing inspection shall be performed by the contractor and shall consist of the examination specified in the applicable Packing Inspection Provisions. Performance testing shall also be performed, and consist of the following requirements:

Level A exterior shipping containers referenced on individual packaging data sheets or selected from the optional container listings in Table V, for the packing level of protection contained in procurement documents shall be

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:58Z
Check the source to verify that this is the current version before use.

subjected to the rough handling tests contained in Federal Standard 101. Packs not exceeding 200 pounds and with no dimensions greater than 60 inches, Method 5007. Packs exceeding 200 pounds or having any dimension greater than 60 inches shall be tested first by Method 5005 followed by either Method 5012 or Method 5023. Fiberboard containers either referenced or selected for Level B packing shall be tested to Method 5017 only. Determination of satisfactory performance shall be in accordance with Para. 7.1.5 of this method.

4.4.3.1 Lot formation. A lot shall consist of all packs made of the same materials and during an identifiable period and submitted at one time for inspection.

4.4.3.2 Sampling for examination. Sampling for examination shall be in accordance with MIL-STD-105, using a single sampling plan. Acceptance or rejection shall be based on the classification of defects and AQL specified in the applicable Packaging Inspection Provisions.

4.5 Government acceptance. Acceptance by the Government inspector of the packaging and packing of each shipment of the item being procured shall be based on process surveillance, review of the contractor's inspection records, and sufficient verification inspection to substantiate the records. The Government inspector shall conduct visual inspection on a spot check basis to assure correct marking of the packs prior to granting approval for shipment.

4.6 Control test. When specified (see 6.1), a control test shall be required.

4.6.1 Responsibility. The contractor shall be responsible for performing the control test on the completed pack as packed, ready for shipment.

4.6.2 Frequency. Control test samples shall be selected at the rate of one per month or two from each 500 produced, whichever occurs first, but not more than two samples shall be selected in any given 30 day period.

4.6.3 Tests. Control test samples shall be subjected to the rough handling test of MIL-P-116.

4.6.4 Failure. Failure of a control test sample to pass any specified test shall be cause for the Government to refuse to accept subsequent lots for shipment until it has been proved to the satisfaction of the Government that the faults revealed by the tests have been corrected.

4.7 Quality control program or inspection system requirements. For USAMICOM purchases, when contracts include provisions for the establishment by the contractor of a quality control program in accordance with MIL-Q-9858 or an inspection system in accordance with MIL-I-45208, and the approved program or system includes samplings and inspection requirements to insure that packs meet the requirements of this specification, that program or system shall be used in lieu of the sampling and inspection provisions of this specification.

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS A
FOR
METHOD I OF MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Item not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper seal or closure of unit pack	Visual
120	Excessive looseness in unit pack	Shake
121	Intermediate container not as specified	Visual
122	Improper closure of intermediate container	Visual
123	Shipping container not in accordance with specification	Visual
124	Excessive cube	Visual
125	Improper blocking	Visual
126	Closure not in accordance with specification	Visual
127	Weight and size exceed container limitations	Weight and Measure
128	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
129	Marking omitted, incorrect or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 202640-18T02:58Z
Check the source to verify that this is the currentversion before use.

PACKAGING INSPECTION PROVISIONS B
FOR
SUBMETHOD IA-6, 1A-8 OF MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified (IA-8 only)	Visual
116	Cushioning material not as specified (IA-8 only)	Visual
117	Improper application of cushing (IA-8 only)	Visual
118	Unit container not as specified	Visual
119	Improper seal or closure of unit container	Visual
120	Excessive looseness in unit container (IA-8 only)	Shake
121	Excessive air within unit container (IA-8 only)	Visual
122	Intermediate container not as specified	Visual
123	Improper closure of intermediate container	Visual
124	Shipping container not in accordance with specification	Visual
125	Excessive cube	Visual
126	Improper blocking	Visual
127	Closure not in accordance with specification	Visual
128	Weight and size exceed container limitations	Weigh and Measure
129	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
130	Marking omitted, incorrect or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116

2.4 Heat seal test of MIL-P-116 (IA-8 only)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS C
FOR
SUBMETHOD IA-5 and IA-13 of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not specified	Visual-
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper seal or closure of unit container	Shake
120	Excessive looseness in unit container	Visual
121	Intermediate container not as specified	Visual
122	Improper closure of intermediate container	Visual
123	Shipping container not in accordance with specification	Visual
124	Excessive cube	Visual
125	Improper blocking	Visual
126	Closure not in accordance with specification	Weigh and
127	Weight and size exceed container limitations	Measure
128	Strapping not in accordance with the specification, incorrectly applied, omitted	Visual
129	Marking omitted, incorrect or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. Pneumatic pressure test may be used in lieu of the vacuum chamber test. MIL-C-3955 cans shall be tested by the submersion test in lieu of the vacuum chamber.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS D
FOR
SUBMETHOD IA-14 of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper closure of unit containers	Visual
120	Improper seal of bag	Visual
121	Excessive looseness in unit container	Shake
122	Excessive air within sealed bag	Visual
123	Intermediate container not as specified	Visual
124	Improper closure of intermediate container	Visual
125	Shipping container not in accordance with specification	Visual
126	Excessive cube	Visual
127	Improper blocking	Visual
128	Closure not in accordance with specification	Visual
129	Weight and size exceed container limitations	Weigh and Measure
130	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
131	Marking omitted, incorrect or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. When specified (see 6.1), the vacuum retention test shall be used in lieu of the vacuum chamber test. Outer container shall be removed prior to testing.

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS E
FOR
SUBMETHOD IA-15 of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper closure of seal of unit container	Visual
120	Excessive looseness in unit pack	Shake
121	Excessive air within unit pack	Visual
122	Unit container corners not blunted	Visual
123	Bag not folded to conform to container and secured	Visual
124	Intermediate container not as specified	Visual
125	Improper closure of intermediate container	Visual
126	Shipping container not in accordance with specification	Visual
127	Excessive cube	Visual
128	Improper blocking	Visual
129	Closure not in accordance with specification	Visual
130	Weight and size exceed container limitation	Weigh and Measure
131	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
132	Marking omitted, incorrect or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. When specified (see 6.1), the vacuum retention test shall be used in lieu of the vacuum chamber test. Outer container or wraps shall be removed prior to testing.

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS F
FOR
SUBMETHOD IA-16 of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper seal or closure of unit pack	Visual
120	Shipping container not in accordance with specification	Visual
121	Excessive cube	Visual
122	Closure not in accordance with specification	Visual
123	Weight and size exceed container limitations	Weigh and Measure
124	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
125	Marking omitted, incorrect or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. When specified (see 6.1), the vacuum retention test shall be used in lieu of the vacuum chamber test. Outer container shall be removed prior to testing.

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS G
FOR
SUBMETHOD IB-1 and IB-2 of MIL-P-116

1. Classification of defects

Char. No.	Characteristics Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Coating not uniform thickness	Measure
113	Coating thickness less than 0.025 inch minimum for items weighing less than 1/4 pound	Measure
114	Coating thickness less than 0.05 inch minimum for items weighing 1/4 pound or more	Visual
115	Wrap not as specified (IB-2 only)	Visual
116	Intermediate container not as specified	Visual
117	Improper closure of intermediate container	Visual
118	Shipping container not in accordance with specification	Visual
119	Excessive cube	Visual
120	Improper blocking	Visual
121	Closure not in accordance with specification	Weigh and Measure
122	Weight and size exceed container limitations	Visual
123	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
124	Marking omitted, incorrect, or illegible	

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 When specified (see 6.1), the cyclic exposure test of MIL-P-116 shall be used.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the currentversion before use.

PACKAGING INSPECTION PROVISIONS H
FOR
SUBMETHODS, IC-1, IC-2, IC-e of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper seal of unit container	Visual
120	Excessive looseness in unit container	Shake
121	Excessive air within unit container	Visual
122	Intermediate container not as specified	Visual
123	Improper closure of intermediate container	Visual
124	Shipping container not in accordance with specification	Visual
125	Excessive cube	Visual
126	Improper blocking	Visual
127	Closure not in accordance with specification	Visual
128	Weight and size exceed container limitations	Weigh and Measure
129	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
130	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVIDIONS J
FOR
SUBMETHOD IIa and IIc of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Improper amount of desiccant (formula of MIL-P-116)	Visual
119	Desiccant contacting item	Visual
120	Unit container not as specified	Visual
121	Improper seal of unit container	Visual
122	Excessive looseness in unit container (IIc only)	Shake1
123	Window not as specified (IIa only)	Visual
124	Excessive air within unit container	Visual
125	Intermediate container not as specified (IIc only)	Visual
126	Improper closure of intermediate container	Visual
127	Shipping container not in accordance with specification	Visual
128	Excessive cube	Visual
129	Improper blocking	Visual
130	Closure not in accordance with specification	Visual
131	Weight and size exceed container limitations	Weigh and Measure
132	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
133	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.2 Determination of cleanliness of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. When specified (see 6.1), the vacuum retention test shall be used in lieu of the vacuum chamber test. Outer container shall be removed prior to testing (IIa only).

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS K
FOR
SUBMETHODS IId and IIf of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of preservative	Visual
118	Improper amount of desiccant (formula of MIL-P-116)	Visual
119	Desiccant contacting item	Visual
120	Unit container not as specified	Visual
121	Improper seal of unit container	Visual
122	Excessive looseness in unit container	Shake
123	Intermediate container not as specified	Visual
124	Improper closure of intermediate container	Visual
125	Shipping container not in accordance with specification	Visual
126	Excessive cube	Visual
127	Improper blocking	Visual
128	Closure not in accordance with specification	Visual
129	Weight and size exceed container limitations	Weigh and Measure
130	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
131	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. Pneumatic pressure test may be used in lieu of the vacuum test. MIL-C-3955 cans may be tested by the submersion test in lieu of the vacuum chamber test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS L
FOR
SUBMETHOD IC-4 of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not specified	Visual
117	Improper application of cushioning	Visual
118	Unit container not as specified	Visual
119	Improper seal of unit container	Visual
120	Excessive looseness in unit container	Shake
121	Intermediate container not as specified	Visual
122	Improper closure of intermediate container	Visual
123	Shipping container not in accordance with specification	Visual
124	Excessive cube	Visual
125	Improper blocking	Visual
126	Closure not in accordance with specification	Visual
127	Weight and size exceed container limitations	Weigh and Measure
128	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
129	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. Submersion test may be used in lieu of the vacuum chamber test for containers sealed with tape. Pneumatic pressure test may be used in lieu of the vacuum chamber test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

selected at random from each

PACKAGING INSPECTION PROVISIONS P
FOR
SUBMETHOD IIb of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent drfective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Improper amount of desiccant (formula of MIL-P-116)	Visual
119	Desiccant contacting item	Visual
120	Unit container not as specified	Visual
121	Improper seal or closure of unit containers	Visual
122	Unit container corners not blunted	Visual
123	Excessive looseness in unit container	Shake
124	Excessive air within unit container	Visual
125	Intermediate container not as specified	Visual
126	Improper closure of intermediate container	Visual
127	Shipping container not in accordance with specification	Visual
128	Excessive cube	Visual
129	Improper blocking	Visual
130	Closure not in accordance with specification	Visual
131	Weight and size exceed container limitations	Weigh and Measure
132	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
133	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. When specified (see 6.1), vacuum retention test shall be used in lieu of the vacuum chamber test. Outer container shall be removed prior to testing.

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS Q
FOR
SUBMETHOD IIe of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Improper amount of desiccant (formula of MIL-P-116)	Visual
119	Desiccant contacting item	Visual
120	Unit container not as specified	Visual
121	Unit container corners not blunted	Visual
122	Improper seal or closure of unit container	Shake
123	Excessive looseness in unit container	Visual
124	Excessive air within unit container	Visual
125	Intermediate container not as specified	Visual
126	Improper closure of intermediate container	Visual
127	Shipping container not in accordance with specification	Visual
128	Excessive cube	Visual
129	Improper blocking	Visual
130	Closure not in accordance with specification	Visual and Measure
131	Weight and size exceed container limitations	Visual
132	Strapping not in accordance with specification incorrectly applied, omitted	Visual
133	Marking omitted, incorrect, or illegible	

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116. When specified (see 6.1), the vacuum retention test shall be used in lieu of the vacuum chamber test. Overwrap when provided shall be removed prior to testing.

2.4 Heat seal test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS R
FOR
METHOD III of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Wrap not as specified	Visual
113	Cushioning material not as specified	Visual
114	Improper application of cushioning	Visual
115	Unit container not as specified	Visual
116	Improper seal or closure of unit container	Visual
117	Excessive looseness in unit container	Shake
118	Intermediate container not as specified	Visual
119	Improper closure of intermediate container	Visual
120	Shipping container not in accordance with specification	Visual
121	Excessive cube	Visual
122	Improper blocking	Visual
123	Closure not in accordance with specification	Visual
124	Weight and size exceed container limitations	Weight and Measure
125	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
126	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

PACKAGING INSPECTION PROVISIONS S
FOR
SUBMETHODS, IC-7, IC-9, IC-10, IVa, IVb of MIL-P-116

1. Classification of defects

Char. No.	Characteristic Major AQL 4.0 percent defective	Method of Inspection
101	Cleaning material contaminated	Visual
102	Item not completely cleaned	Visual
103	Item damaged by action of cleaning process	Visual
104	Item contaminated (handling with bare hands after cleaning)	Visual
105	Process incomplete (omission of final rinse)	Visual
106	Cleaning materials not as specified	Visual
107	Item not completely dry	Visual
108	Item damaged by air blast, overheating	Visual
109	Contaminated compressed air (moisture)	Visual
110	Contaminated wiping cloths	Visual
111	Items not thoroughly drained	Visual
112	Preservative not as specified	Visual
113	Incomplete coverage of preservative	Visual
114	Excessive preservative	Visual
115	Wrap not as specified	Visual
116	Cushioning material not as specified	Visual
117	Improper application of cushioning	Visual
118	Plastic material not as specified	Visual
119	Improper seal of unit container	Visual
120	Excessive looseness in unit container	Shake
121	Plastic material not of sufficient thickness to contain the item	Visual
122	Intermediate container not as specified	Visual
123	Improper seal or closure of unit container	Visual
124	Perforation or tear lines omitted (IC-7)	Visual
125	Shipping container not in accordance with specification	Visual
126	Excessive cube	Visual
127	Improper blocking	Visual
128	Closure not in accordance with specification	Visual
129	Weight and size exceed container limitations	Weigh and Measure
130	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
131	Marking omitted, incorrect, or illegible	Visual

2. Quality conformance tests

2.1 Determination of cleanliness of MIL-P-116

2.2 Determination of preservative application of MIL-P-116

2.3 Vacuum chamber test of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

5. PACKAGING

This section is not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

a. Title, number, and date of this specification.

b. If cleaning of recoil, equilibrator, buffer cylinders and gun tubes other than specified is required (see 3.3.1.1.7).

c. If cleaning of nonmetallic items other than specified is required (see 3.3.1.1.8).

d. If preservatives are required for surfaces of partially painted parts (see 3.3.1.3.1).

e. If preservation of oil impregnated metallic items other than in accordance with applicable specification is required (see 3.3.1.3.7).

f. If preservation of items with grease fittings other than specified is required (see 3.3.1.3.11).

g. Selection of applicable level of packaging as required (see 3.4), and packing (see 3.5).

h. If containers other than specified are required (see 3.4.1.1.4c, and 3.4.1.1.4.1).

i. If packaging requirements as specified are required (see 3.5.1).

j. If palletization of unit loads as specified is required (see 3.5.3.2).

k. If shelf life code marking specified is required (see 3.6.2).

l. If first article pack other than specified is required (see 3.7) and 4.3). If preproduction and tests other than specified are required (see 4.3).

m. If a control test is required (see 4.6).

n. If the vacuum retention test in lieu of the vacuum chamber test is required (see packaging and packing inspection provision D, E, F, J, P and Q).

o. If the cycle exposure test is required (see packaging and packing inspection provision G).

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

p. If commercial packaging is required (see 3.4, 3.4.3 and 3.5).

6.2 The use of Electronic Accounting Machine (EAM) Card Packaging Data is clarified in 6.2.1 through 6.2.5.

6.2.1 Packaging Data for Standard Group, Secondary Items (Repair Parts) MIL-STD-647. Packaging data consists of the applicable requirements of this specification which are referenced on the individual packaging standards and listed thereon. The standards are identified in the upper right hand corner by an alphabetical-numerical symbol, for example, A-1-A-1-A. To complete and implement packaging data, individual items are identified to the appropriate packaging standard. A one line electronic accounting method (EAM) card or an automatic listing produced from the card is printed "in-the-clear", that is directly readable without decoding. Each block of information is identified on the card or list. When it is desired to package any specific item or group of items, the items are located on the list by part or stock number, and an abbreviated six letter, noun nomenclature; then by looking in the "packaging reference" block we can read the alpha-numerical symbols (A1A1A) which identify the applicable packaging standard. The user then refers to the applicable paragraphs of this specification listed on the standard. Each standard contains complete information on the methods and materials to be used. The listing or EAM card also carries the quantity of items to be placed in the unit package, and when available, the size of the unit package in 1/100ths of a foot, the cube of the package in 1/100ths of a cubic foot, and the weight of the item in 1/100ths of a pound. The balance of the information on the listing is, for the most part, a repeat of data in the appropriate standard and is present primarily for internal analytical purposes at the engineering level. All additional data, such as type of intermediate and exterior containers and guidance for their usage is contained in the various sections of this specification.

6.2.2 Detailed packaging data sheets. Detailed packaging data sheets are prepared for an item when, because of some peculiarity of the item to be packaged, a drawing, sketch, figure, or narrative instruction is required to adequately show the package blocking or arrangement of the item within the package. Data sheets contain complete information for the packaging and packing of the items involved either as self contained data or by reference to a supporting specification covering the packaging materials and procedures to be employed.

6.2.3 Use of packaging standard. This standard details the requirements for the cleaning, preservation (if applicable), unit package protection and intermediate packing and marking requirements. All notes on the standard refer to applicable paragraphs of this specification. Each standard also refers to an applicable inspection plan.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

6.2.4 Use of EAM packaging data card. When the contract or order specifies that packaging and packing shall be in accordance with this specification and a one line description of the peculiar information such as federal name, packaging standard number, part number, federal stock number, method, cleaning, first preservative, source revision, unit package quantities, unit package weight, unit package cube, unit package size, second preservative and machine account number, the contractor shall proceed to find the applicable standard number contained in this specification and proceed to package the item utilizing the unit and intermediate quantities prescribed on the one line description. NOTE: The unit package weight, size and cube are considered the maximum allowable permitted. With the utilization of the packaging standard number (see 6.2.3) and the peculiar data referenced herein complete packaging instructions are provided.

6.2.5 Supplemental listing of packaging data. When the contract or order specifies that packaging and packing of an item shall be in accordance with a standard packaging provision (see 6.2.3) reference shall be made to the supplemental listing for necessary information peculiar to the specific part number. Such data representing the maximum permissible item size, package size, cube and all other data shown on the supplemental listing,shall be used, except no use shall be made of the abbreviated nomenclature.

6.3 Detailed Information.

6.3.1 Ecology. Pollution of the environment due to packaging of materiels will be controlled and held to a minimum. Environmental quality standards prescribed by Federal States and local authorities will be used in determining corrective measures required to control pollution. The design and selection of packaging systems and materials will include consideration of reuse, biodegradability, and recycling when appropriate to promote environmental quality and the conservation of resources.

6.3.1.1.1 Any cleaning material used in the process must be selected to comply with the Williams Steiger Occupational and Health Act of 1970 and the use thereof shall conform to Air Pollution Control Statutes and regulations in force in the geographic and industrial areas where cleaning is performed.

6.4 Cleaning, preservation and packaging. Supplemental information on cleaning, preservation and packaging may be found in Manual on Preservation, Packaging and Packing of Military Supplies and Equipment, Preservation; Defense Supply Agency Number DSAM 4145.2, Volume I/Army Number TM 38-230-1/1 Navy Number NAVAIR 15-01-1/Air Force Number AFP 71-4, Volume I/Marine Corps Number MCO P4030.31.

6.5 Cushioning design. Supplemental information on cushioning design may be found in Military Standardization Handbook Packaging Cushioning Design, MIL-HDBK-304.

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

6.6 Anchoring, blocking, bracing, cushioning and waterproofing. Supplemental information on use and application of these procedures may be found in MIL-STD-1186.

6.7 Inspection and Quality Assurance Handbook. Information on the basic principles of sampling inspection and administration of the sampling inspection procedures may be found in the Department of Defense Quality and Reliability Assurance Handbook H 53.

6.8 Shrink-Film Bonding means for Palletized Loads. Shrink-film processes when used as a bonding means for palletized loads will be in accordance with MIL-STD-147 and AMCR 746-2.

6.9 Small Parcel Shrink-Film System. Small parcel shrink-film system will be as prescribed in AMCR 746-2.

Table I. Intimate Wrap Size

Length and Width of Single Wrap	Length and Width of Double Wrap
Rectangular or square items having a depth of 6 inches or less	
Length = 2 times width, plus 2 times depth, plus 2 inches	Length = 4 times width, plus 4 times depth
Width = Length, plus depth, plus 1 inch	Width = Length, plus depth, plus 1 inch
Rectangular or square items having a depth greater than 6 inches	
Length = 2 times width, plus 2 times depth, plus 2 inches	Length = 4 times width, plus 4 times depth
Width = Length, plus depth, plus 2 inches	Width = Length, plus depth, plus 2 inches
Cylindrical items having an outside diameter of 1 1/2 inches or less	
Length = Length, plus diameter, plus 1 inch	Length = Length, plus diameter, plus 1 inch
Width = 3.1416 times diameter, plus 1 inch	Width = 2 times 3.1416, times diameter, plus 1 inch
Cylindrical items having an outside diameter, greater than 1 1/2 inches	
Length = Length, plus diameter plus 1 inch	Length = Length, plus diameter plus 1 inch
Width = 3.1416 times, diameter plus 2 inches	Width = 2 times 3.1416, times diameter, plus 2 inches

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.

Table II. Selection and closure of unit and intermediate containers.

Specification/title	Use and/or closure
PPP-B-26, Bag, Plastic, (General Purpose)	See note 1.
PPP-B-566, Box, Folding, Paperboard (Variety 2)	See notes 2, 3, and 4.
PPP-B-636, Box, Shipping Fiberboard (Class Weather Resistant)	See note 4 and 5.
PPP-B-665, Box, Paperboard, Metal Edged and Components, Class 1	See notes 2, 3, and 4.
PPP-B-665, Class 2	See notes 2 and 3.
PPP-B-676, Box, Set-up (Variety 2)	See notes 2, 3, and 4.
PPP-S-30, Sack, Shipping Paper (Reinforced or Cushioned)	See note 1.
MIL-B-117, Bags and Sleeves, Interior Packaging	See note 1.
MIL-C-3955, Cans, Fiber Spiral Wound	See note 7.

Note 1. For MIL-C-117 bags, net weight of contents will not exceed 10 pounds except that there are no weight restrictions for the following bags: type 1, class B, style 2; type 1, class C, style 2; and type 1, class E, styles 1, 2, and 3. Closure may be any adequate means, except when specified.

Note 2. Use only when weight of contents is as prescribed in applicable container specification.

Note 3. Closure will be accomplished as specified herein (see 3.4.1.1.4.4) or in the applicable specification or appendix of the specification. Table VI lists tapes which may be used for closures if the tape cited herein or in the appendix of the specification is not available.

Note 4. When methods are specified which require container within a waterproof and water vaporproof barrier materials, water resistant and weather resistant containers or not a requirement.

Note 5. Closure will be accomplished in accordance with 3.4.1.1.4.4.

Note 7. Closure will be accomplished as specified in the applicable specification.

Source: https://assist.dla.mil -- Downloaded: 20261O-18T02:58Z
Check the source to verify that this is the current version before use.

Table III. Tabulation of Unit Packages Per Intermediate Container

Unit pkgs per int	Unit package weight pounds	Unit package cube Cubic ft
100	.4	.0150
96	.41	.0156
92	.43	.0163
88	.46	.0170
84	.47	.0178
80	.5	.0187
76	.52	.0197
72	.55	.0208
68	.59	.0220
64	.62	.0234
60	.66	.0250
56	.71	.0267
52	.77	.0288
48	.83	.0312
44	.91	.0340
40	1.0	.0375
36	1.11	.0416
32	1.25	.0478
28	1.43	.0535
24	1.66	.0625
20	2.0	.0750
16	2.5	.0937
12	3.33	.125
8	5.	.187
4	10.	.375

NOTE: Table III will function as follows:

a. If the unit package weight is .60 pounds and the unit cube in feet is .0175, 64 units would be placed in the intermediate container.

b. If the unit package weight is .49 pounds and the unit package cube in feet is .0265, 56 unit packages would be placed in the intermediate container.

c. In every instance the lesser quantity of unit packages would be placed in the intermediate container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Table IV. Intermediate Dimensional Tolerance

Inside dimension, length width or height	Allowable tolerance in any one direction
Inches	Inch
0 through 8	1/8
Over 8 through 12	1/4
Over 12 through 18	3/8
Over 18	1/2

Table V

PREFERRED EXTERIOR CONTAINERS FOR LEVELS A AND B

Specifications		Level A	Level B
PPP-B-585	Box, Wood, Wirebound Pallet Type	X[1,3]	X[3]
PPP-B-591	Box, Fiberboard, Wood-Cleated		X
PPP-B-601	Box, Wood, Cleated Plywood	X[3]	X[3]
PPP-B-621	Box, Wood, Nailed and Lock Corner	X[2,3]	X[3]
PPP-B-636	Box, Shipping, Fiberboard		X[4]
PPP-B-640	Box, Fiberboard, Corrugated Triple-Wall		X[4]
PPP-C-650	Crate, Wood, Open and Covered	X	X
PPP-D-700	Drum; Shipping and Storage, Metal, 55-Gallon (For Acid and Corrosive Liquids)	X	X
PPP-D-705	Drum, Shipping and Storage; Steel, 16- and 30-Gallon Capacity	X	X
PPP-D-723	Drum, Fiber		X
PPP-D-729	Drum, Shipping and Storage, Steel 55-Gallon	X	X
PPP-P-704	Pail, Shipping, Steel, (1 through 12-Gallon)	X	X

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Table V - Cont.

Specifications		Level A	Level B
MIL-C-104	Crate, Wood, Lumber and Plywood Sheathed, Nailed and Bolted	X	X
MIL-C-3774	Crate, Wood, Open, 12,000 and 16,000-Pound Capacity	X	X
MIL-D-6054	Drum, Metal, Shipping and Storage	X	X
MIL-B-17757	Box, Shipping, Fiberboard, (Modular Sizes)		X
MIL-B-26195	Box, Wood - Cleated, Skidded, Load-Bearing Base	X	X
MIL-D-40030	Drum, Plastic, Molded Polyethylene	X	X
MIL-B-43666	Box, Shipping Consolidation	X[5]	X[4]

FOOTNOTES

1 Styles 2 or 3 designed for type 3 loads, class 3 use (overseas), are preferred for packing Army materiel. Boxes designed for type 1 and 2 loads, or those requiring special design for specific items, may be used when prescribed by the packaging activity.

2 Style 4 will be considered as preferred for Army materiel providing weight of contents does not exceed 400 pounds.

3 Container sizes listed in MIL-STD-1187 shall be used to the maximum extent practicable.

4 Fiberboard containers used for Army shipments will be class weather-resistant.

5 Wood cleated plywood and wirebound plywood will be used for level A.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Table VI

Tape Substitution List

Listed below are specification tapes prescribed for use in container closure. The adjacent column contains a list of suitable substitutes that can be used when required tapes are not available and cannot be obtained. In the event tapes cannot be obtained, MMM-A-250 (Adhesive, Water Resistant) can be used as an alternate for closing both interior and exterior containers.

Specification and Title	Type	Grade	Class	Suitable Substitute	Type	Grade	Class
PPP-T-76[1], Tape	N/A	N/A	N/A	PPP-T-60	III	N/A	1&2
Pressure Sensitive				PPP-T-60	IV	N/A	1
Adhesive, Paper				PPP-T-45	I	N/A	2
(For Carton Sealing)				PPP-T-70	N/A	N/A	N/A
PPP-T-60[1], Tape	III	N/A	1&2	PPP-T-45[2]	ALL	N/A	2
Packaging, Waterproof &IV				PPP-T-70	N/A	N/A	N/A
PPP-T-45, Tape,	ALL	N/A	2	PPP-T-60	III	N/A	1&2
Gummed, Paper,							
Reinforced & Plain,							
For Sealing & Securing							
PPP-T-70[1], Tape	1&2	N/A	N/A		*		
Packaging, Plastic							
Film							

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Table VI - Cont.

Specification and Title	Type	Grade	Class	Suitable Substitute	Type	Grade	Class
PPP-T-42[1], Tape Packaging, Masking, Paper	1&2	N/A	N/A		*		

[1]Pressure Sensitive

[2]Water Activated

*Substitute not available.

Custodian:

Army - AT

Review activities:

Army - EL, GL, ME, MI, MU, SM, WC, AV,

User:

Navy - MC


Preparing Activity:

Army - AT


Project No. PACK-A140

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:58Z
Check the source to verify that this is the current version before use.


STIFFENERS & LOAD DEFLECTORS

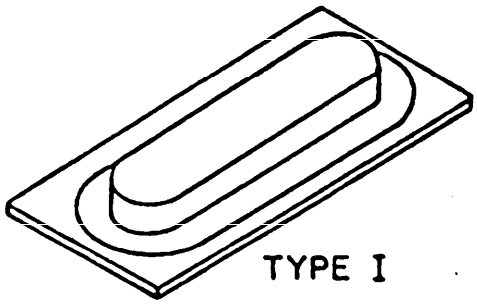


TYPE I

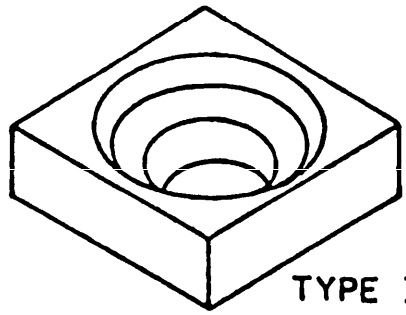


TYPE II

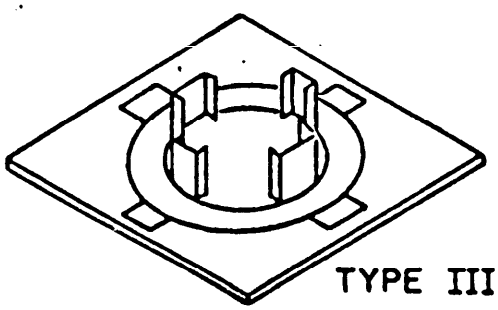


TYPE III

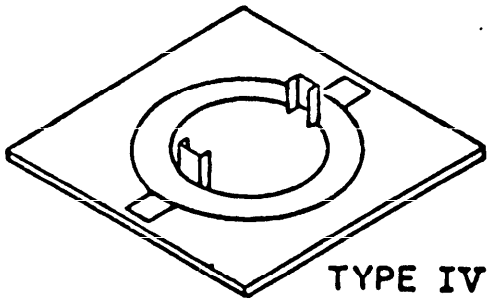


TYPE IV

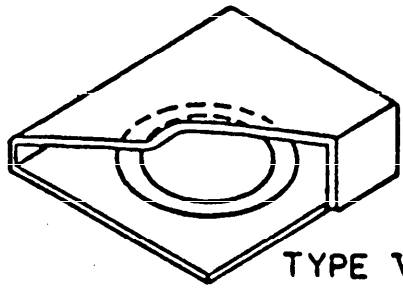

TYPE V

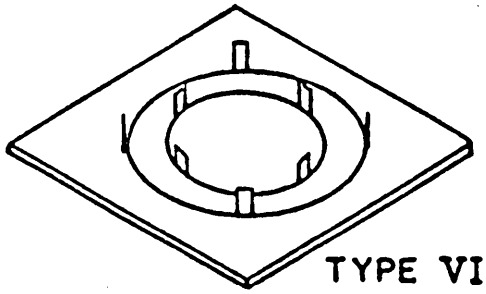

TYPE VI

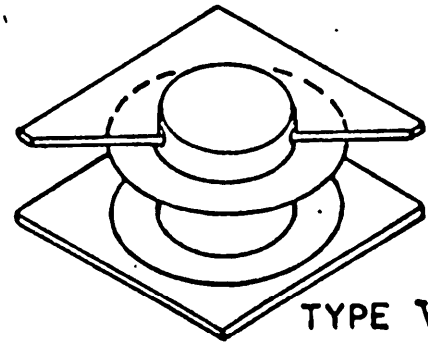

TYPE VII

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Tank-Automotive Command
ATTN: DRSTA-GSS
Warren, MI 48080

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assistdla.mil/ -- Downloaded: 2026-04-18T02:58Z
Check the source to verify that this is the current version before use.