MIL-P-14236 (Ord)
27 January 1956
Superseding
FCP 954-54
AFPS 50
AFPS 51

# MILITARY SPECIFICATION

## PACKAGING OF GEAR, OIL, M3 SERIES, M6A1 OR M6A1E1

### 1. SCOPE

1.1 This specification covers the packaging and packing of Gear, Oil, M3 Series, M6A1 or M6A1E1 for each level of protection.

### 2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids, form a part of this specification.

SPECIFICATIONS

Federal

| | |
|---|---|
| FF-B-571 | - Bolts; Nuts; Studs and Rivets. |
| FF-N-101 | - Nails, Spikes, Staples and Tacks. |
| NN-P-515 | - Plywood, Container Grade. |
| QQ-S-781 | - Strapping, Flat, Steel. |
| QQ-S-790 | - Strapping, Round; Steel, Bare and Zinc-Coated. |
| UU-T-111 | - Tape; Paper, Gummed (Sealing and Securing). |
| LLL-B-631 | - Boxes, Fiber, Corrugated (for Domestic Shipment). |
| PPP-B-601 | - Boxes, Wood, Cleated-Plywood. |
| PPP-B-621 | - Boxes, Wood, Nailed and Lock Corner. |
| PPP-C-843 | - Cushioning Materials, Cellulosic. |
| PPP-T-76 | - Tape, Paper, Water Resistant, Pressure-Sensitive. |

Military

| | |
|---|---|
| JAN-P-100 | - Packaging and Packing for Overseas Shipment - General Specification. |
| JAN-P-106 | - Boxes; Wood, Nailed (Overseas Type). |

FSC 1290

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

| | |
|---|---|
| JAN-P-108 | - Boxes; Fiberboard, Corrugated and Solid (Military Type). |
| MIL-P-116 | - Preservation, Methods of. |
| MIL-B-121 | - Barrier Material, Greaseproofed, Flexible (Waterproofed). |
| JAN-P-127 | - Packaging and Packing for Overseas Shipment - Tape, Adhesive, Pressure-Sensitive, Water-Resistant. |
| MIL-B-131 | - Barrier-Material; Water-Vaporproof, Flexible. |
| MIL-D-3464 | - Desiccant (Activated) in Bags; for Static Dehumidification and Packaging. |
| MIL-P-13988 | - Paper, Lens Tissue, Antitarnish, Wrapping. |

STANDARD

Military

| | |
|---|---|
| MIL-STD-105 | - Sampling Procedures and Tables for Inspection by Attributes. |
| MIL-STD-129 | - Marking for Shipment and Storage. |

DRAWING

Army-Navy Aeronautical

| | |
|---|---|
| AN-7511 | - Humidity Indicator, Large. |

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Material. - Material shall be as specified herein. Material not definitely specified shall be of good commercial quality, entirely suitable for the purpose. Material shall be free from defects and imperfections that might affect the serviceability of the finished packaging and packing. Unless otherwise specified, the contractor shall provide the Government inspector inspection certification of adherance to the requirements of material specification.

3.2 Preservation and Packaging.

3.2.1 Level A

3.2.1.1 Cleaning. - The exposed unpainted metal surfaces of the oil gear, including the mounting hardware, shall be cleaned in accordance with process C-2 of Specification MIL-P-116, and the cleaned surfaces shall be dried by method D-4 of Specification MIL-P-116. The exposed glass surfaces and cable assembly of the M6A1E1 oil gear shall be cleaned by process C-1 of Specification MIL-P-116. The cleaned glass surfaces shall be covered with antitarnish tissue paper conforming



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

to Specification MIL-P-13988 and shall be secured with pressure-sensitive tape conforming to type I or II, grade C of Specification JAN-P-127.

3.2.1.2 Preservation. - The mounting hardware shall be coated with preservative P-7 conforming to Specification MIL-P-116.

3.2.1.3 Packaging. - Each oil gear shall be packaged method IIb in accordance with Specification MIL-P-116 (see figure 6) and as follows:

3.2.1.3.1 The covered glass surfaces shall be over covered with cellulosic cushioning material conforming to type III, class B of Specification PPP-C-843. The cushioning material shall be secured with pressure-sensitive tape.

3.2.1.3.2 The preserved mounting hardware shall be wrapped with greaseproof barrier material conforming to type I or II, grade A, class 1 of Specification MIL-B-121. The wrap shall be secured with gummed tape conforming to any class of Specification UU-T-111. The wrapped hardware shall be placed in a waterproof bag conforming to type I or II, grade A, class b or c of Specification JAN-P-117. The bag shall be closed by heat sealing after the excess entrapped air is removed.

3.2.1.3.3 The cable assembly ends of the M6A1E1 oil gear shall be wrapped with greaseproof barrier material conforming to type I, grade C, class 1 or 2 of Specification MIL-B-121. The wrap shall be secured with pressure-sensitive tape.

3.2.1.3.4 The cradle assembly shall be constructed. The plywood used shall conform to type II or III, class 2 of Specification NN-P-515. All nails used for assembly shall be clinched except those securing top cleats to side cleats. Four carriage bolts conforming to Specification FF-B-571 shall be positioned in the base. A sheet of greaseproof barrier material conforming to type I, grade C, class 1 or 2 of Specification MIL-B-121 shall be placed over the bolts, back up block, and plywood pads. The oil gear shall be positioned on the bolts and secured to the base. A flat metal washer and a lock washer shall be used under each nut. The exposed threads above the nuts shall be coated with unthinned paint. (see figures 2, 3, and 4)

3.2.1.3.5 The cable assemblies, oil gear M6A1E1 only, shall be wound around the coupling assembly and immobilized to the oil gear with twine or pressure-sensitive tape.

3.2.1.3.6 The bagged mounting hardware shall be secured to the oil gear with pressure-sensitive tape.

3.2.1.3.7 The required units of desiccant conforming to class 2 of Specification MIL-D-3464 shall be secured to the oil gear by twine or pressure-sensitive tape. A layer of greaseproof barrier material conforming to type I or II grade A of Specification MIL-B-121 shall be placed between the desiccant and surface of the oil gear.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.2.1.3.8 A humidity indicator conforming to Drawing AN-7511 shall be secured to the top of the oil gear with pressure-sensitive tape. A protective piece of greaseproof barrier material, conforming to type I or II, grade A of Specification MIL-B-121 shall be inserted between the humidity indicator and oil gear.

3.2.1.3.9 The support assembly with hold down cleats shall be assembled to the base. The hold down cleats may be nailed to the base for ease of assembly and handling. Two machine bolts conforming to Specification FF-B-571 shall be inserted through the oil gear side bracket holes and the plywood support pads from the inside. Large washers shall be placed between the bolt heads and side brackets. A flat washer and lock washer shall be used under each nut. The exposed threads over the nuts shall be coated with unthinned paint.

3.2.1.3.10 The mounted oil gear shall be fitted snugly in the interior fiberboard box having a minimum bursting strength of 350 pounds per square inch and conforming to style RSC or OLC (full overlap) of Specification LLL-B-631. The box shall be closed by covering all seams with gummed tape conforming to class 3 of Specification UU-T-111. The corners of the fiberboard box shall be blunted and any stapling or stitched joints shall be covered with pressure-sensitive tape.

3.2.1.3.11 The interior fiberboard box shall be placed in a water vaporproof barrier bag conforming to class 1 of Specification MIL-B-131. The water vaporproof bag shall be closed by heat sealing after the excess entrapped air is removed. The time lapse between securing of the desiccant and the closure of the barrier bag shall be held to an absolute minimum. (see figure 5)

3.2.1.3.12 The bagged interior fiberboard box shall be placed in the exterior fiberboard box conforming to compliance symbol V2s, V3s, or V3c, any style except FTC of Specification JAN-P-108. Any stapling or stitching on the interior of the fiberboard box shall be covered with pressure-sensitive tape. The exterior fiberboard box shall be closed by covering all seams with water-resistant tape conforming to Specification PPP-T-0076 (2 inch).

3.2.2 Level B - Packaging shall be as specified in 3.2.1.

3.2.3 Level C

3.2.3.1 Cleaning. - Cleaning shall be as specified in 3.2.1.1.

3.2.3.2 Preserving. - The oil gear shall be preserved to meet conditions existing during shipment.

3.2.3.3 Packaging. - The unpainted metal surfaces of the oil gear shall be covered with greaseproof barrier material.

3.3 Packing



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.3.1 Level A - The packaged oil gear shall be immobilized in a shipping container conforming to Specification PPP-B-601, oversea type; or to Specification JAN-P-106, style 2 or 4. Nailed wood boxes shall be constructed from group I or II lumber. Closure and strapping of the shipping container shall be in accordance with Appendix I of the box specification except that straps shall not be stapled on domestic shipments. (see figure 7)

3.3.2 Level B - The packaged oil gear shall be immobilized in a shipping container conforming to Specification PPP-B-601, domestic type; or to Specification PPP-B-621, style 2 or 4.

3.3.3 Level C - The oil gear shall be cushioned, blocked or braced as necessary and immobilized in a suitable domestic wooden box, wirebound box, or strapped three-way corner crate in accordance with commercial practice which shall afford complete protection to the item during transportation by a common carrier at the lowest reasonable cost. The two plywood support pads and back up block as indicated in figure 2 for Level A shipment may be used to immobilize the oil gear in a modified box with a skid base, conforming to style 2 of Specification PPP-B-621. The pads and block may be secured to the side panels of the suggested container in approximately the same locations as indicated on the crate assembly drawing, figure 2.

3.4 Marking

3.4.1 Marking shall be in accordance with Standard MIL-STD-129.

3.4.2 The serial number of the oil gear shall appear with the permanent marking on the shipping container.

3.4.3 The method of preservation (Method IIb for Levels A and B and Method I for Level C) shall appear with the permanent marking on the shipping container.

3.4.4 Level B shipping containers shall be marked: "LTD MIL PK."

3.4.5 Level C shipping containers shall be marked: "MIN MIL PK."

3.4.6 Oversea marking. - The following requirements apply only to oversea shipments:

3.4.6.1 The service symbol shall be stenciled on the sides of the container adjacent to the service color corner marking. The size shall be commensurate with the size of the basic marking on the exterior container.

3.4.6.2 The SNL group (SNL-F) shall be stenciled on the sides of the container adjacent to the service color corner marking. The size shall be commensurate with the size of the basic marking on the exterior container.

3.4.6.3 Exterior container markings shall be protected with a coating of transparent waterproof material in accordance with Standard MIL-STD-129.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

3.5 Pilot pack. - Prior to quantity production, a pilot pack consisting of a complete and packed shipping container, shall be submitted to the Government inspector to determine conformance with the requirements of this specification for Level A protection.

3.6 Workmanship. - Adequate controls shall be utilized to check for contamination of cleaning solvents and preservatives. Wraps shall be neat, conforming, and firmly secured. Tapes shall be uniformly applied to interior boxes and shall completely cover and adhere to all joints and seams. Shipping containers shall be free of protruding staples, screws, nails, etc. Strapping shall be applied perpendicular to the sides of the container just prior to shipment and shall not cover any container marking. Irrevalent marking shall be neatly obliterated. Visual observation shall indicate that the application of specified materials and methods are practical and will not result in packaging or packing deficiencies.

## 4. QUALITY ASSURANCE PROVISIONS

4.1 General. - The inspection and test procedures specified in this section are those that shall be conducted (as applicable) to determine acceptability of the packaging and packing covered by this specification. The tests shall be accomplished by the contractor or his agent under the supervision of the Government inspector. The inspection and test procedures shall be conducted in process. Unless otherwise specified in the detail specification or contract, and prior to any production, the pilot pack shall have met all the requirements of 4.4 and 4.5 herein.

4.2 Lot sizes. - The lot size submitted for acceptance purposes shall be determined by the procuring activity or Government inspection agency and shall be as large as is practicable, consistent with available facilities.

4.3 Sampling

4.3.1 For inspection. - Sampling for inspection shall be conducted in accordance with Standard MIL-STD-105.

4.3.2 For tests. - Sampling tests for packages shall be conducted in accordance with Table I.

TABLE I. - SAMPLING

| Lot Size Packages | Sample Size | Rejection Number |
|---|---|---|
| 3 to 50 | 3 | 1 |
| 51 to 500 | 5 | 1 |
| 501 to 1000 | 10 | 2 |
| 1001 and over | 15 | 3 |

4.4 Inspection

4.4.1 Classification of defects. - Visual inspection for defects established in Table II shall apply to each item of the applicable sample of interior packages or exterior containers.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

TABLE II - CLASSIFICATION OF DEFECTS

Major Defects

| AQL = 1.0 percent | Method of Inspection |
|---|---|
| Incorrect marking | Visual |
| Illegible marking | Visual |

Minor Defects

| AQL = 2.5 percent | Method of Inspection |
|---|---|
| Improper closure of interior packages | Visual |
| Inadequate strapping or nailing | Visual |
| Inadequate blocking | Visual |
| Improper packing (insufficient clearance between contents and container; container oversize; inadequate or excessive cushioning material; etc.) | Visual |
| Inadequate bolting | Manual-Visual |
| Immobilized items, desiccant and interior packages. | Manual-Visual |

Incidental Defects

| AQL = 6.5 percent | Method of Inspection |
|---|---|
| Workmanship | Visual |

4.5 Tests

4.5.1 Rough handling test. - The pilot pack shall be subjected to the rough handling test in accordance with the requirements of Specification JAN-P-100. Applicable only to level A.

4.5.2 Packaging tests. - Each package in the applicable sample of Table I shall be subjected to the pertinent packaging tests of Specification MIL-P-116 as determined by the methods of preservation shown in Table III.

4.6 Acceptance and rejection

4.6.1 Final acceptance

4.6.1.1 Inspection. - Lots shall be accepted when the applicable samples have met the requirements of the inspection of defects established in Table II.

4.6.1.2 Tests

4.6.1.2.1 Tests for packages. - Lots shall be accepted when the defective units found during tests are less than the rejection number shown in Table I. Lots shall be rejected when the defective units equal or exceed the rejection number.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

## TABLE III - PACKAGING TESTS

| TEST | METHOD OF PRESERVATION | | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | I | IA-1 | IA-2 | IA-5 | IA-8 | IB-1 | IC-1 | IC-2 | IC-3 | IC-4 | IC-5 | IIa | IIb | IIc | IId | IIe | III |
| Heat Seal (Applicable to level A) | | | | | x | | | | | | | x | x | x | | x | |
| Quick leak (Applicable to level A) | | x | x | x | x | | | | | | | x | x | x | x | x | |
| *Waterproofness (Applicable to level A) | | | | | | | x | x | x | x | x | | | | | | |
| Determination of cleanliness test (Applicable to levels A and C) | (Required when a cleaning process is used.) | | | | | | | | | | | | | | | | |
| Preservative compound application (Applicable to levels A and C) | (Required when a preservative is used.) | | | | | | | | | | | | | | | | |

*When the size, weight, or other characteristics of Method IC packages precludes the use of the waterproofness test, the water spray test shall be used in lieu thereof.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

4.6.2 Corrective action. - Defective packages and packs from lots which have been accepted shall be corrected prior to shipment.

5. PREPARATION FOR DELIVERY
(There are no applicable requirements)

6. NOTES

6.1 Ordering data. - Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) The level of protection required.
(c) Applicable stock number.

6.2 Replacement of packaging materials. - The procurement documents should specify that all packaging materials and containers which become unserviceable during inspection and tests shall be replaced prior to shipment of the items.

TABLE IV

*DIMENSIONS OF SHIPPING CONTAINER

Dimensions in Inches

| Level A Military | Length | Width | Height |
|---|---|---|---|
| M3 Series | | | |
| Inside | 25 1/4 | 13 | 30 1/4 |
| Outside | 28 1/4 | 14 3/8 | 31 5/8 |
| Displacement: | 7.4 cubic feet | | |
| M6A1 and M6A1E1 | | | |
| Inside | 25 1/4 | 13 | 32 1/2 |
| Outside | 28 1/4 | 14 3/8 | 33 7/8 |
| Displacement: | 8.0 cubic feet | | |

*Container dimensions are approximate and may vary slightly due to manufacturer's practice.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Dimensions in Inches

| Level B Limited Military | Length | Width | Height |
|---|---|---|---|
| M3 Series | | | |
| Inside | 25 1/4 | 13 | 30 1/4 |
| Outside | 28 1/4 | 14 1/4 | 31 1/2 |
| Displacement: | 7.3 cubic feet | | |
| M6A1 and M6A1E1 | | | |
| Inside | 25 1/4 | 13 | 32 1/2 |
| Outside | 28 1/4 | 14 1/4 | 33 3/4 |
| Displacement: | 7.8 cubic feet | | |

TABLE V
*WEIGHTS

| Level A Military | M3 | M3A1 | M6A1 | M6A1E1 |
|---|---|---|---|---|
| Net | 260 lbs | 260 lbs | 281 lbs | 281 lbs |
| Tare | 71 lbs | 71 lbs | 76 lbs | 76 lbs |
| Gross | 331 lbs | 331 lbs | 357 lbs | 357 lbs |
| Level B Limited Military | | | | |
| Net | 260 lbs | 260 lbs | 281 lbs | 281 lbs |
| Tare | 67 lbs | 67 lbs | 72 lbs | 72 lbs |
| Gross | 327 lbs | 327 lbs | 353 lbs | 353 lbs |

TABLE VI
BILL OF MATERIAL

Dimensions in Inches (Min.)

| No. | Part | Req'd | Length | Width | Thickness | Reference |
|---|---|---|---|---|---|---|
| | FIBERBOARD BOX AND CONTENTS (per item for Level A) | | | | | |
| 1 | *Box, Exterior (Inside Dimensions) | 1 | | | | JAN-P-108 compliance symbols V2s, V3s, and V3c, any style except FTC |
| | M3 Series | | 24 3/4 | 12 1/2 | 29 1/2 (Depth) | |
| | M6A1 or M6A1E1 | | 24 3/4 | 12 1/2 | 31 3/4 (Depth) | |

*Container dimensions and weights are approximate and may vary slightly due to manufacturer's practice.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Dimensions in Inches (Min.)

| No. | Part | Req'd | Length | Width | Thickness | Reference |
|---|---|---|---|---|---|---|
| 2 | Barrier Material<br>M3 Series<br>M6A1 or M6A1E1 | | <br>91<br>96 | <br>40<br>40 | | MIL-B-131, class 1 |
| 3 | Humidity Indicator | 1 | | | | AN 7511 |
| 4 | *Box, Interior (Inside Dimensions)<br>M3 Series<br>M6A1 or M6A1E1 | 1 | <br>24<br>24 | <br>11 3/4<br>11 3/4 | <br>28 1/2 (Depth)<br>30 3/4 (Depth) | LLL-B-631 min. bursting strength 350 lbs/sq. in. style RSC or OLC (full overlap) |
| | Tape, Pressure-Sensitive | as required | | | | JAN-P-127 type I or II, grade C |
| 5 | Base | 1 | 24 | 11 3/4 | 1/2 | NN-P-515 type II or III, class 2 |
| 6 | Runners | 2 | 24 | 3 | 3/4 | JAN-P-106, group I or II |
| | Nails, 5d | 8 | for assembly of runners to base | | | FF-N-101 |
| 7 | Hold Down Cleats<br>M3 Series<br>M6A1 or M6A1E1 | 4 | <br>27<br>29 1/4 | <br>2 5/8<br>2 5/8 | <br>3/4<br>3/4 | JAN-P-106, group I or II |
| 8 | Top Cleats | 2 | 11 3/4 | 2 5/8 | 3/4 | JAN-P-106, group I or II |
| 9 | Support Pads | 2 | 4 | 2 1/2 | 1/2 | NN-P-515, type II or III, class 2 |
| 10 | Back-up Block | 1 | 5 1/2 | 2 5/8 | 1 1/8 | JAN-P-106, group I or II |
| 11 | Support & Side Cleat | 4 | 24 | 2 5/8 | 3/4 | JAN-P-106, group I or II |
| | Nails, 5d | as required for cradle assembly | | | | FF-N-101 |

*Container dimensions are approximate and may vary slightly due to manufacturer's practice.



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Dimensions in Inches (Min.)

| No. | Part | Req'd | Length | Width | Thickness | Reference |
|---|---|---|---|---|---|---|
| | Nails, 7d | 3 | to secure back-up block | | | FF-N-101 |
| 12 | Desiccant | | 11 lbs (176 units) | | | MIL-D-3464, class 2 |
| 13 | Bolts, Carriage | 4 | 2 1/2 3/8 dia. with plain washer and lock washer and hex nut per bolt | | | FF-B-571 |
| 14 | Bolts, Machine | 2 | 2 3/8 dia. with plain washer and lock washer and nut per bolt | | | FF-B-571 |
| | Washers, Steel | 2 | 13/32 I.D. | 2 1/4 O. D. | | .0625 (thick) |
| | Unthinned Paint | as required | | | | |
| | Greaseproof Barrier Material | | 16 | 12 | | MIL-B-121 type I, grade C, class 1 or 2 |
| | Greaseproof Barrier Material - M6A1E1 | | 36 | 12 | | MIL-B-121 type I, grade C, class 1 or 2 |
| | Greaseproof Barrier Material | | 12 | 10 | | MIL-B-121 type I or II, grade A, class 1 |
| 15 | Waterproof Bag | 1 | 5 | 3 | | JAN-P-117 type I or II, grade A, class b or c |
| | Tape, Paper, Gummed | | 150 | 3 | | UU-T-111 class 3 |
| | Tape, Paper, Water-Resistant | | 160 | 3 | | PPP-T-0076 |
| 16 | Cellulosic Cushioning Material | | 8 | 4 | 1/4 | PPP-C-843 type III, class B |
| 17 | Paper, Tissue | | 6 | 2 | | MIL-P-13988 |
| | Cleaning Material | as required | | | | MIL-P-116 C-2, C-1 |
| | Preservative | as required | | | | MIL-P-116 P-7 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

| No. | Part | Req'd | Dimensions in Inches (Min.) Length | Width | Thickness | Reference |
|---|---|---|---|---|---|---|
| | LEVEL A CONTAINER (per item, style 4 box, JAN-P-106) | | | | | |
| 18 | Sheathing (Top & Bottom) | 2 | 26 3/4 | 14 3/8 | 11/16 | JAN-P-106 group I or II |
| 19 | Sheathing (Side) | 2 | | | | JAN-P-106 group I or II |
| | M3 Series | | 28 1/4 | 30 1/4 | 11/16 | |
| | M6A1 or M6A1E1 | | 28 1/4 | 32 1/2 | 11/16 | |
| 20 | Sheathing (End) | 2 | | | | JAN-P-106 group I or II |
| | M3 Series | | 13 | 30 1/4 | 3/4 | |
| | M6A1 or M6A1E1 | | 13 | 32 1/2 | 3/4 | |
| 21 | Cleats (End) | 4 | | | | JAN-P-106 group I or II |
| | M3 Series | | 31 3/8 | 2 5/8 | 3/4 | |
| | M6A1 or M6A1E1 | | 33 5/8 | 2 5/8 | 3/4 | |
| | Nails, 6d | as required for end cleating | | | | FF-N-101 |
| | Nails, 9d | as required for assembly | | | | FF-N-101 |
| 22 | Strapping, Flat | 2 | 100 | 3/4 | .020 | QQ-S-781 type I class A or B |
| | or Round | 2 | 100 | .0915 (13 gage) | | QQ-S-790 class A or B |
| | LEVEL B CONTAINER (per item for style 2 box, PPP-B-621) | | | | | |
| | Sheathing (Top & Bottom) | 2 | 28 1/4 | 14 1/4 | 5/8 | PPP-B-621 group I or II |
| | Sheathing (Side) | 2 | | | | PPP-B-621 group I or II |
| | M3 Series | | 28 1/4 | 30 1/4 | 5/8 | |
| | M6A1 or M6A1E1 | | 28 1/4 | 32 1/2 | 5/8 | |
| | Sheathing (End) | 2 | | | | PPP-B-621 group I or II |
| | M3 Series | | 13 | 30 1/4 | 3/4 | |
| | M6A1 or M6A1E1 | | 13 | 32 1/2 | 3/4 | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

Dimensions in Inches (Min.)

| No. Part | Req'd | Length | | Thickness | Reference |
|---|---|---|---|---|---|
| Cleats (Vertical) | 4 | | | | PPP-B-621 group I or II |
| M3 Series | | 30 1/4 | 2 5/8 | 3/4 | |
| M6A1 or M6A1E1 | | 32 1/2 | 2 5/8 | 3/4 | |
| Cleats (Horizontal) | 4 | | | | PPP-B-621 group I or II |
| M3 Series | | 7 3/4 | 2 5/8 | 3/4 | |
| M6A1 or M6A1E1 | | 7 3/4 | 2 5/8 | 3/4 | |
| Nails, 6d | as required for cleating | | | | FF-N-101 |
| Nails, 9d | as required for assembly of box | | | | FF-N-101 |
| Strapping, Flat | 2 | 100 | 3/4 | .020 | QQ-S-781, type I class A or B |
| or Round | 2 | 100 | .0915 (13 gage) | | QQ-S-790 class A or B |
| LEVEL C | | | | | |
| Cleaning, preserving, packaging and packing material as required for shipment, see 3.2.3 and 3.3.3. | | | | | |

Patent notice: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention in any way related thereto.

CUSTODIAN:
Army-Ordnance Corps



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

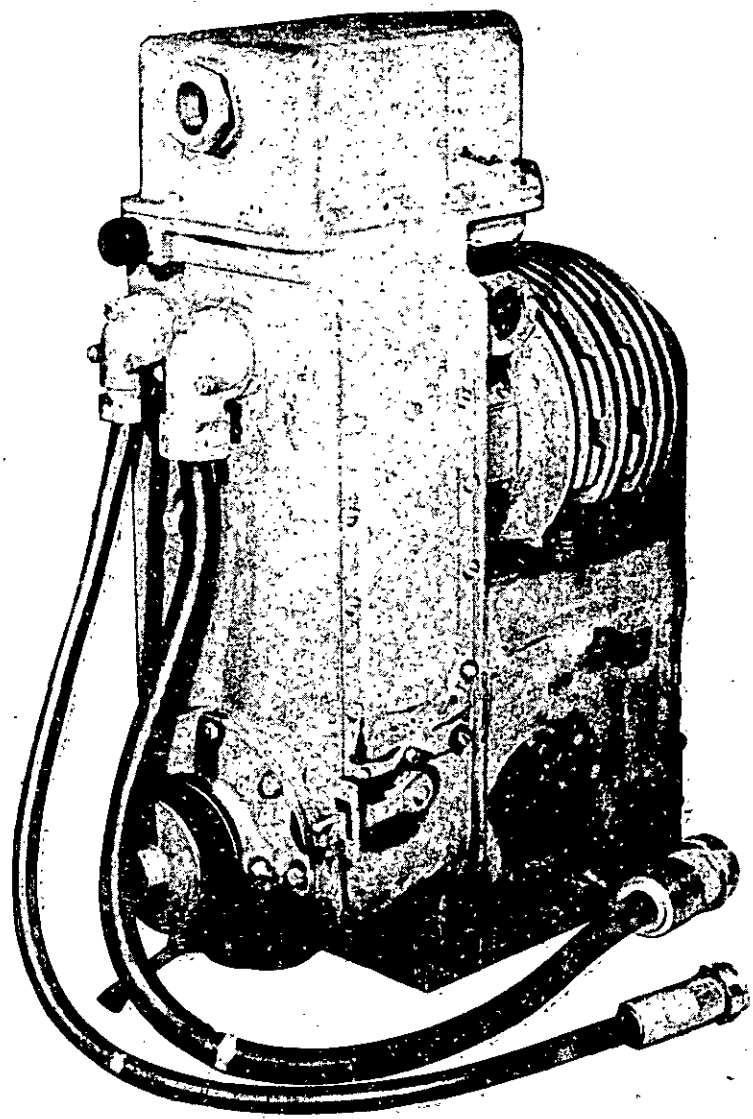


**FIGURE 1**
**GEAR, OIL, M6A1E1**



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

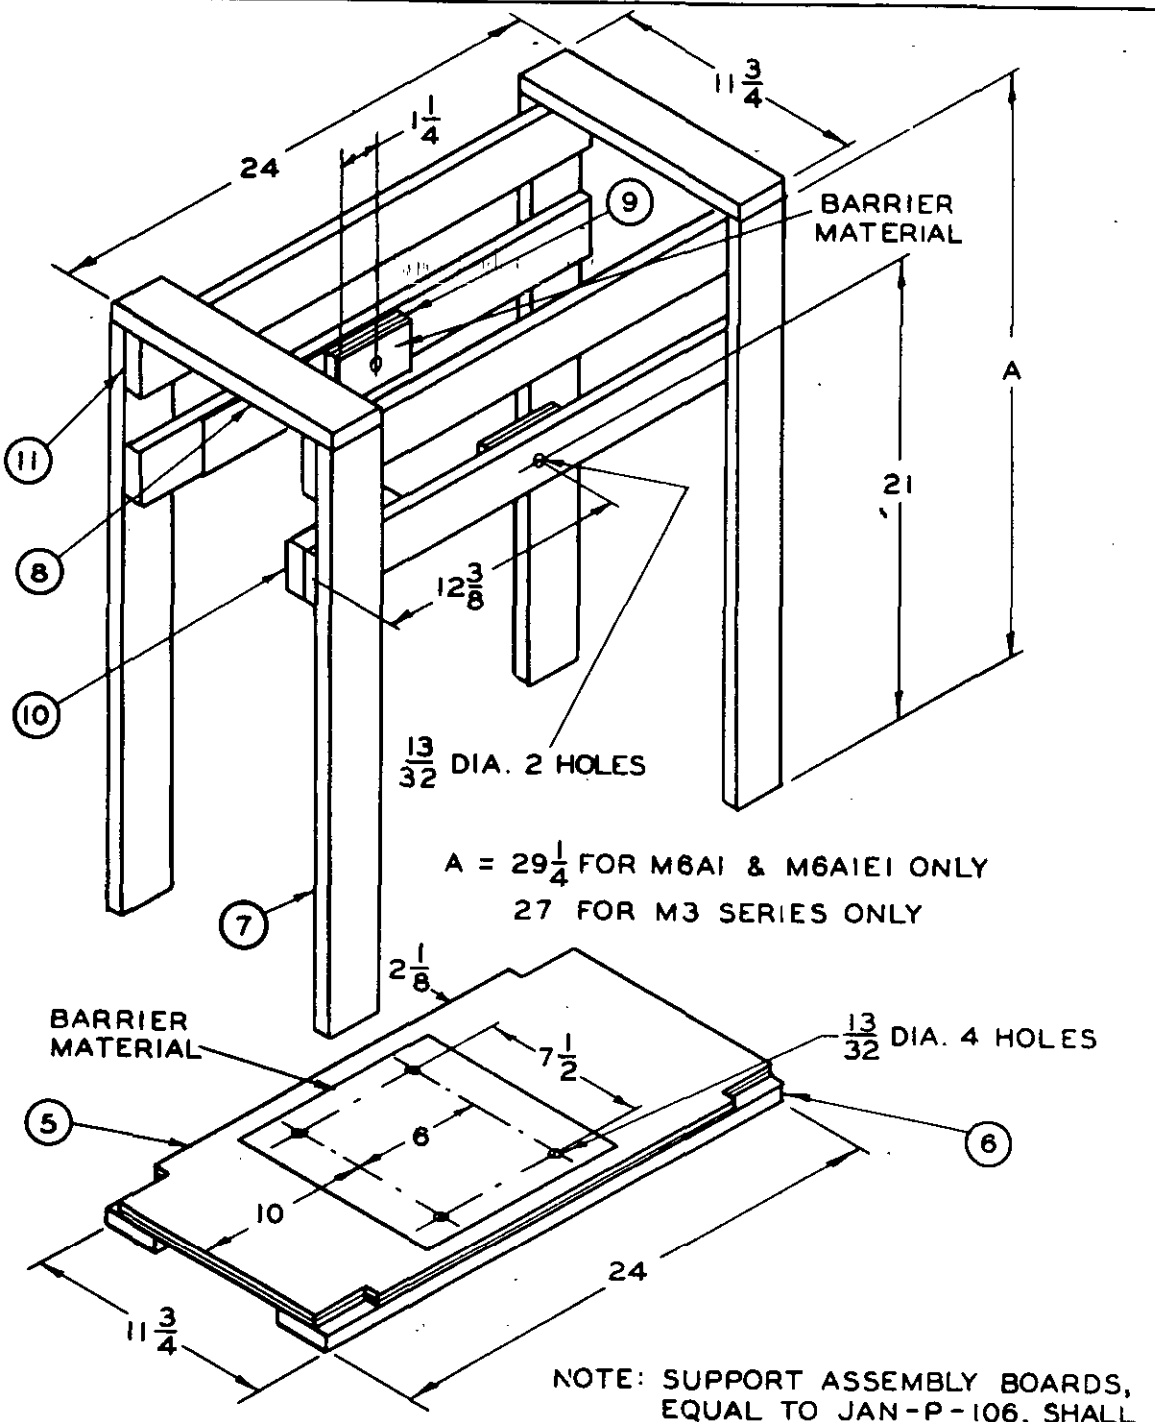



FIGURE 2

GEAR.OIL. M3 SERIES. M6A1 OR M6A1E1. CRADLE ASSEMBLY



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

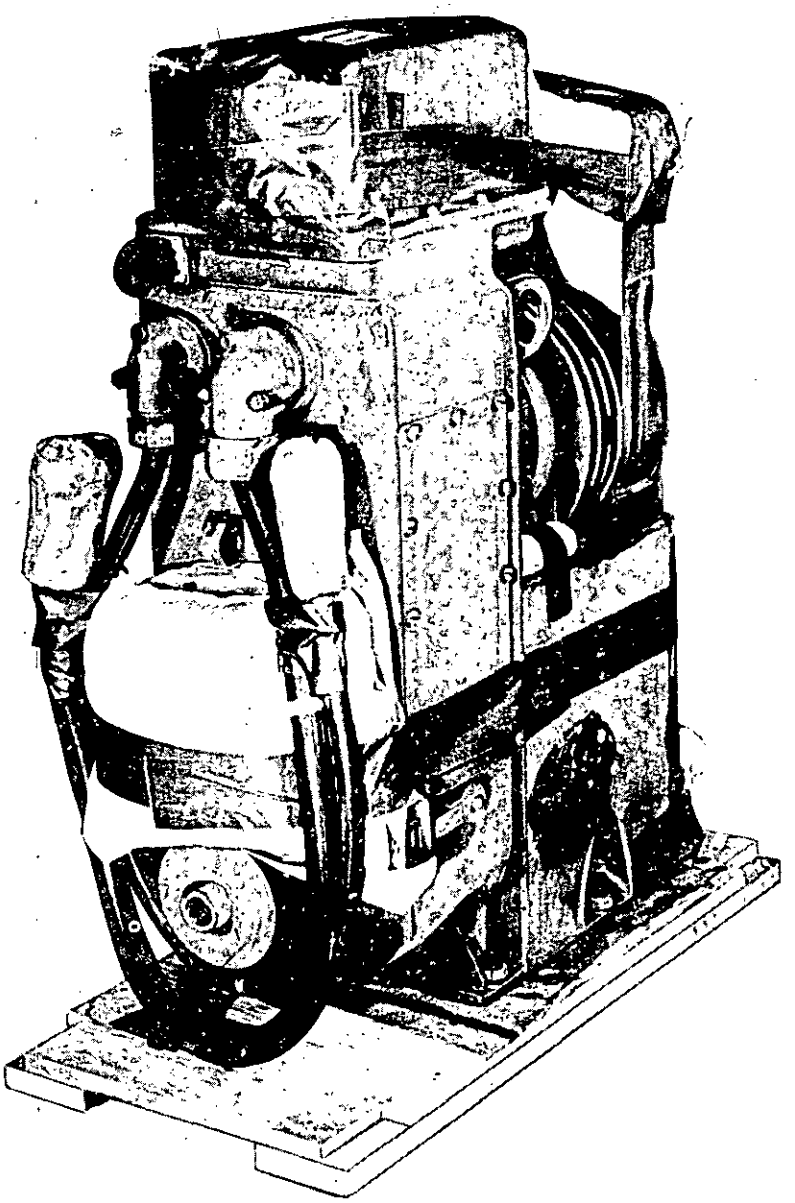


FIGURE 3
GEAR, OIL, M6A1E1 SECURED ON BASE



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

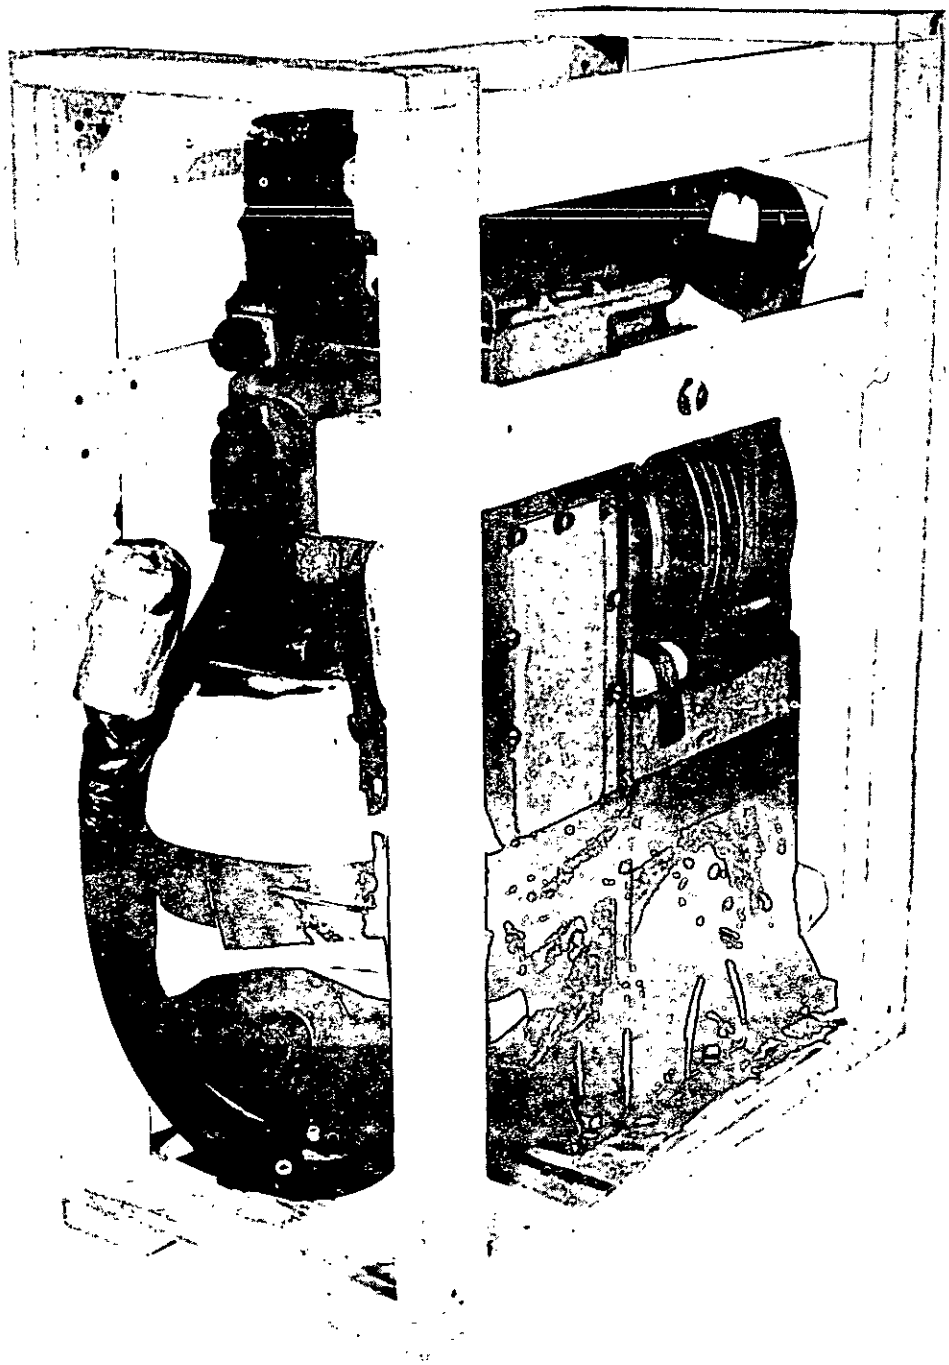


FIGURE 4
GEAR, OIL, M6A1E1 SECURED IN CRADLE ASSEMBLY



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

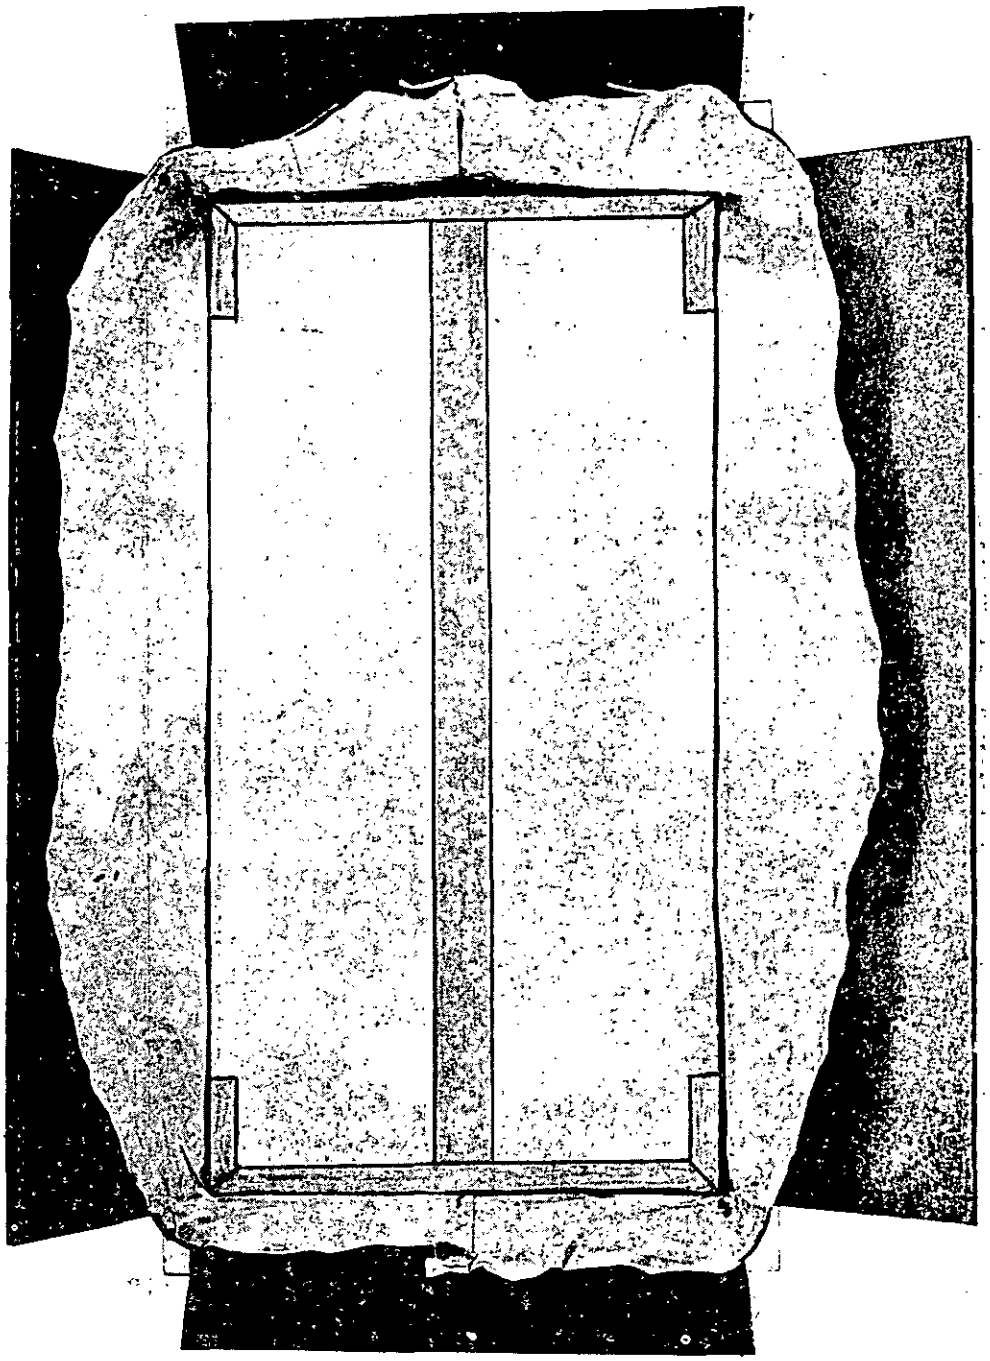


**FIGURE 5**
**GEAR, OIL, M3 SERIES, M6A1 OR M6A1E1**
**READY FOR CLOSURE OF BARRIER BAG**



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

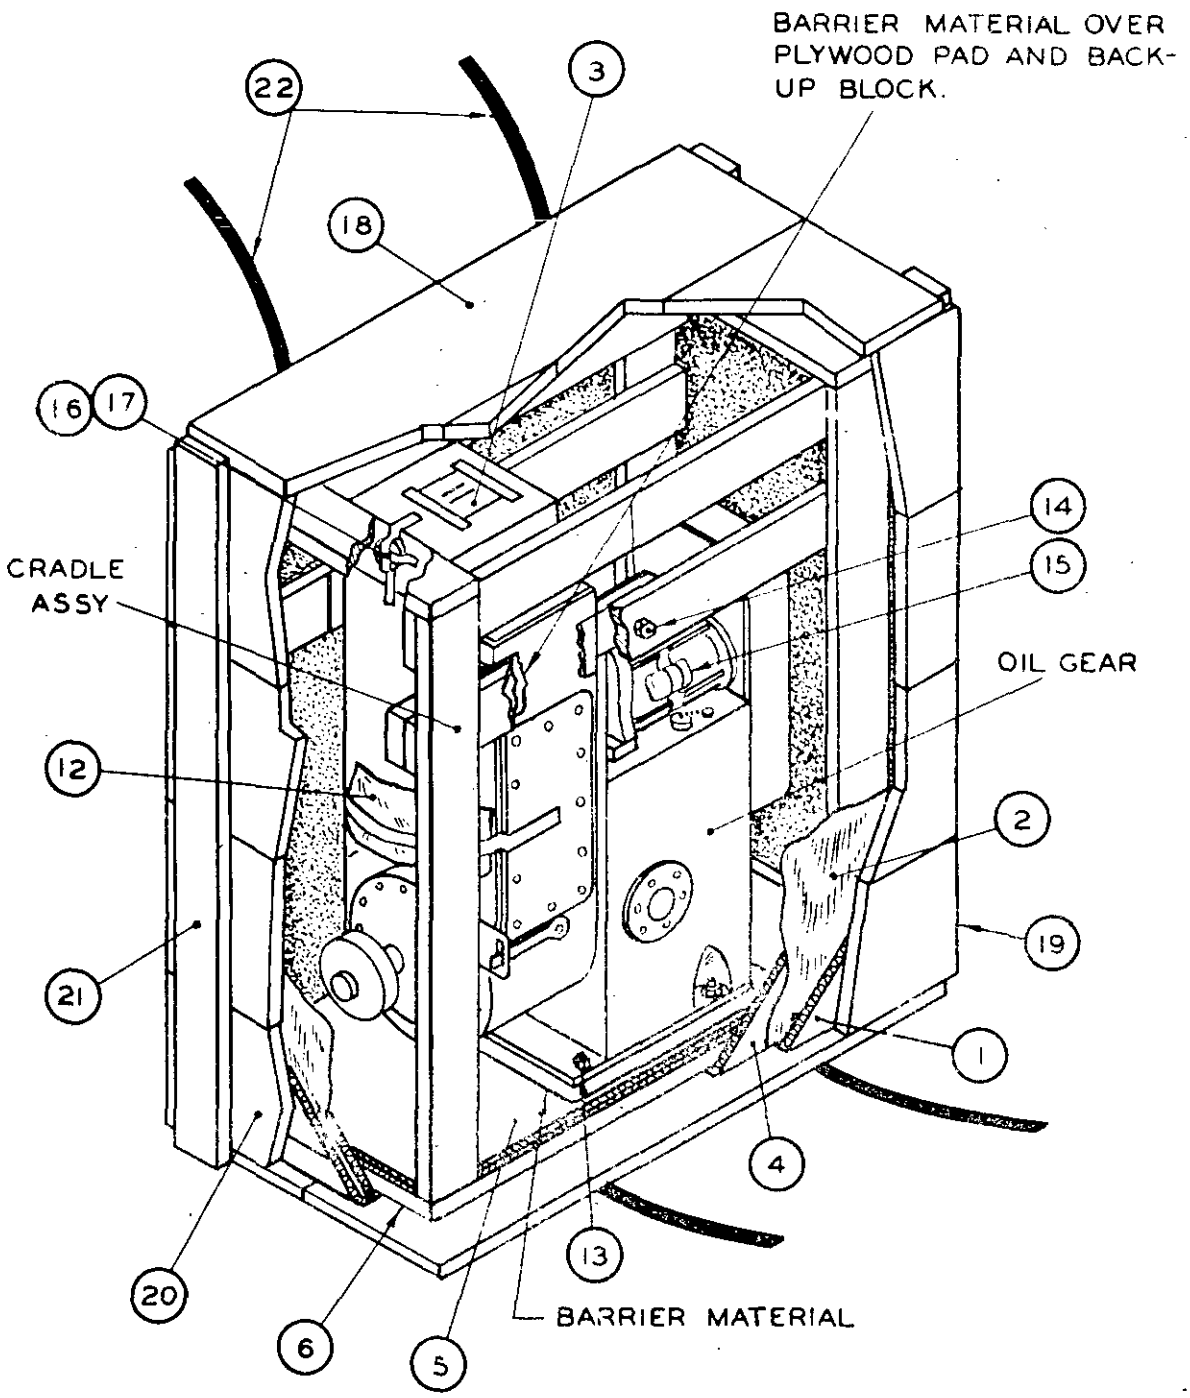



FIGURE 6

GEAR, OIL, M3 SERIES, M6A1, OR M6A1E1 PACKAGED METHOD IIb



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

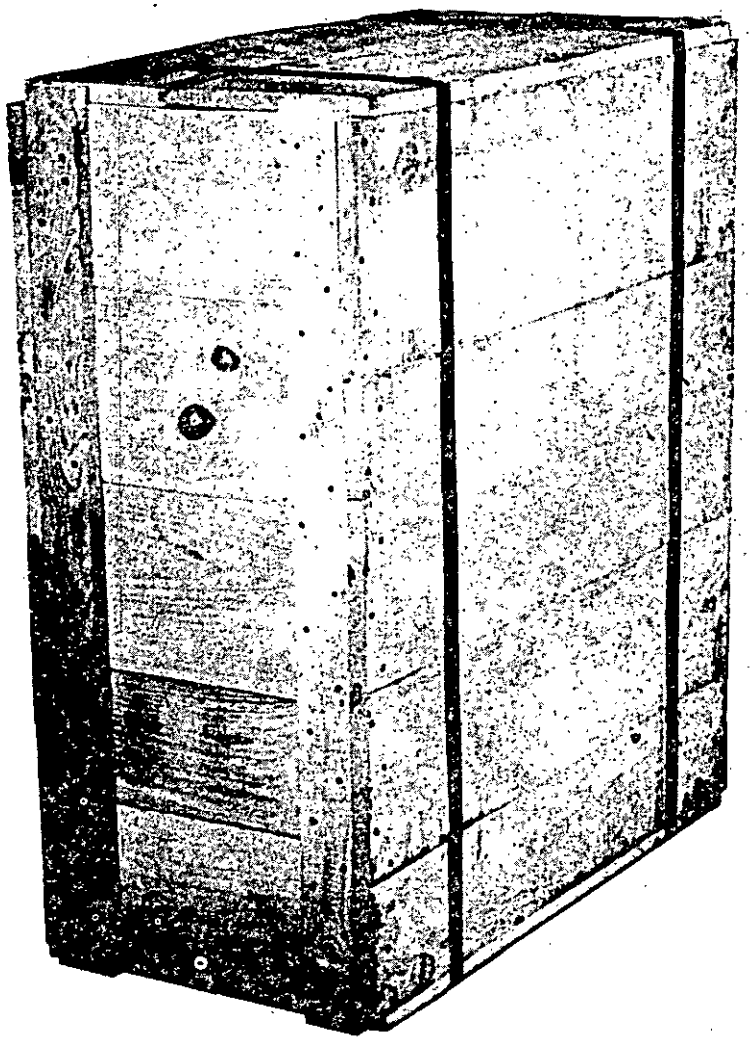


FIGURE 7
GEAR, OIL, M3 SERIES, M6A1 OR M6A1E1 BOX STRAPPED



Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.

# SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT $

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 1541:9

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:58Z
Check the source to verify that this is the current version before use.