MIL-P-14250C(ME)
4 August 1981
SUPERSEDING
MIL-P-14250B(ME)
16 March 1976

MILITARY SPECIFICATION

PIN, STRAIGHT, HEADED AND PIN, STRAIGHT, HEADLESS, SLOTTED TEMPLET STUD

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers headed and headless steel pins for slotted templet studs.

1.2 Classification. The pins shall be of the following types, as specified (see 6.2):

Type I - Headed pins.
Type II - Headless pins.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-S-781 - Strapping, Steel, and Seals.

FSC 6675

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426 appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

PPP-B-566	- Boxes, Folding, Paperboard.
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-B-636	- Boxes, Shipping, Fiberboard.

MILITARY

MIL-P-116	- Preservation, Methods of.
MIL-A-8625	- Anodic Coatings for Aluminum and Aluminum Alloys.

STANDARDS

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specifications to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

ANSI/ASTM A 313	- Chromium-Nickel Stainless and Heat-Resisting Steel Spring Wire.
ANSI/ASTM A 686	- Carbon Tool Steel.
ANSI/ASTM B 16	- Free-Cutting Brass Rod, Bar, and Shapes for Use in Screw Machines.
ANSI/ASTM B 211	- Aluminum-Alloy Bars, Rods, and Wire.
ANSI Y14.5	- Dimensioning and Tolerancing.

(Application for copies should be addressed to the American National Standards Institute, 1430 Broadway, New York, NY 10018.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Description. The pins shall be as shown in Figure 1 for Type I and Figure 2 for Type II, and as specified herein.

3.2 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.3).

3.3 Construction.

3.3.1 Pin shaft. The pin shaft shall be tool steel conforming to ANSI/ASTM A 686, Type W1-8 or W1-9, Grade A, form, condition, and finish optional, or corrosion-resistant steel conforming to ANSI/ASTM A313, UNS S 30200, S 30400, S 30500 or S 31600.

3.3.2 Pin point. Each pin shall have a needle point concentric to the true center of the shaft.

3.3.3 Type I - headed pins. The heads of Type I pins shall be brass conforming to ANSI/ASTM B 16 or aluminum conforming to ANSI/ASTM B 211. When aluminum is used, it shall be anodized in accordance with MIL-A-8625, Type II, class optional. The head shall be permanently attached to the shaft.

3.4 Workmanship. The pins shall be clean, free from scale, smooth, round, straight, and of proper dimensions. The pins shall be free from defects which would interfere with use of the pins in the application for which they are intended.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Material inspection. The contractor is responsible for insuring that materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Quality conformance inspection (see 4.3).
(b) Inspection of packaging (see 4.5).

Source: https://assist.dla.mil -- Downloaded: 202610-18T02:59Z
Check the source to verify that this is the current version before use.

4.3 Quality conformance inspection.

4.3.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105, Inspection Level II.

4.3.2 Lot. All units of the same type offered to the Government at one time shall be considered a lot for purposes of inspection.

4.3.3 Examination. Samples selected in accordance with 4.3.1 shall be examined for the defects specified in 4.4.1. AQL shall be 2.5 percent defective.

4.4 Inspection procedure.

4.4.1 Examination. The pins shall be examined as specified herein for the following major defects:

101. Material not as specified.
102. Diameter not as specified.
103. Other dimensions not as specified.
104. Point not concentric with true center of the shaft.
105. Workmanship not as specified.

4.5 Inspection of packaging.

4.5.1 Quality conformance inspection of pack.

4.5.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.5.1.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.5.1.3 Examination. Samples selected in accordance with 4.5.1.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106. Materials, methods, or containers not as specified.
107. Quantities per unit pack not as specified.
108. Strapping not as specified.
109. Marking illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or Commercial, as specified (see 6.2).

5.1.1 Level A. The pins shall be preserved in accordance with MIL-P-116, Method IC-2. Type I pins shall be preserved in quantities of 144. Type II pins shall be preserved in quantities of one pound. The container shall be the contractor's commercial container or a box conforming to PPP-B-566.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

5.1.2 Commercial. The pins shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be Level A, Level B, or Commercial, as specified (see 6.2).

5.2.1 Level A. The pins, preserved as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-601, Overseas Type, style optional. Strapping shall conform to QQ-S-781, Class 1, Type I or IV, size as applicable. Unless otherwise specified (see 6.2), strapping shall be Finish B. When specified (see 6.2), Finish A strapping shall be used.

5.2.2 Level B. The pins, preserved as specified in 5.1, shall be packed in close-fitting boxes conforming to PPP-B-636, Class Weather Resistant, grade as applicable, style optional.

5.2.3 Commercial. The pins shall be packed in accordance with MIL-STD-1188.

5.3 Marking.

5.3.1 Levels A and B. Level A and B marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The pins are intended for use with slotted templet studs in triangulation by the slotted templet method.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type of pin required (see 1.2).
(c) Whether Level A or Commercial preservation, and Level A, Level B, or Commercial packing is required (see 5.1 and 5.2).
(d) When other than Finish B strapping is required (see 5.2.1).

6.3 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.2).


Custodian:
Army - ME

Review activity:
DLA - GS

Preparing activity:
Army - ME

Project 6675-A238

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

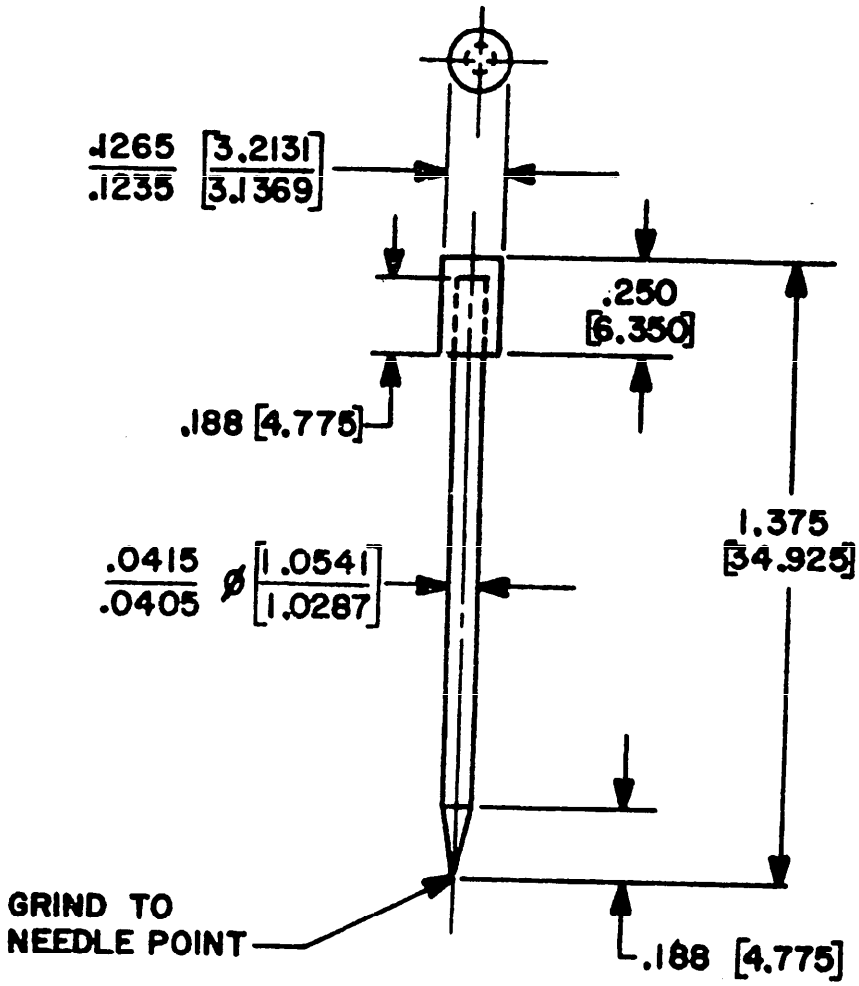


NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETER]
2. UNSPECIFIED TOLERANCES ± .015 [.38]
3. FOR INTERPRETATION OF DIMENSIONING AND TOLERANCING SEE ANSI Y14.5
4. METRIC DIMENSIONS ARE REFERENCE ONLY.

FIGURE 1. Headed pin.

X-3102A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

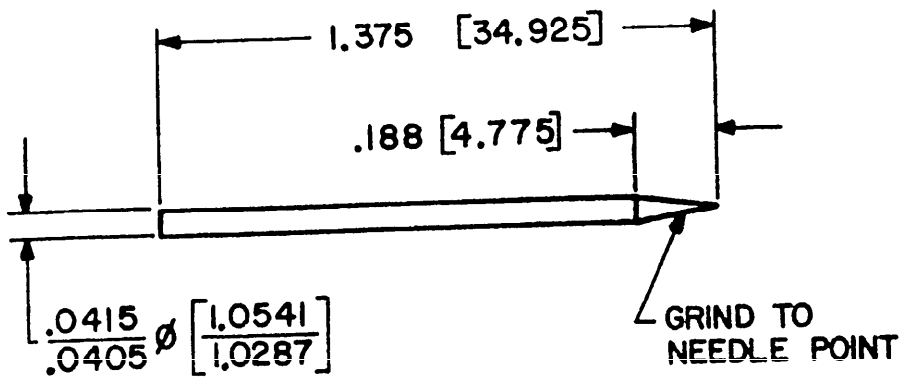

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETER]
2. UNSPECIFIED TOLERANCE ± .015 [.381]
3. FOR INTERPRETATION OF DIMENSIONING AND TOLERANCING SEE ANSI Y14.5
4. METRIC DIMENSIONS ARE REFERENCE ONLY.

FIGURE 2. Headless pin.

X-3103A

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER (Number) AND TITLE MIL-P-14250C(ME) Pin, Straight, Headed and Pin, Straight, Headless, Slotted Templet Stud

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.

)LD

EPARTMENT OF THE ARMY

OFFICIAL BUSINESS
IALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Mobility Equipment Research and
Development Command
ATTN: DRDME-DS
Fort Belvoir, VA 22060

)LD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T02:59Z
Check the source to verify that this is the current version before use.