MIL-P-14351D(ME)
30 October 1979
SUPERSEDING
MIL-P-14351C(ME)
22 July 1975

MILITARY SPECIFICATION

PIPELINE BARREL, CLEANER TRAP:

INCOMING AND OUTGOING

This specification is approved for use by the Mobility Equipment Research and Development Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers steel pipeline barrel cleaner send and receive fluid-propelled pipeline cleaning elements conforming to MIL-C-14076.

1.2 Classification. Pipeline barrel cleaner traps shall be of the following types and sizes, as specified (see 6.2):

Type I - Grooved ends
  Size 6-inch
  Size 8-inch
Type II - Flanged ends
  Size 6-inch
  Size 8-inch
  Size 12-inch

FSC 4730

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Mobility Equipment Research and Development Command, ATTN: DRDME-DS, Fort Belvoir, VA 22060 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

1.2.1 Part number. The military specification part number for the pipeline barrel traps specified herein shall be as follows (see 6.9):

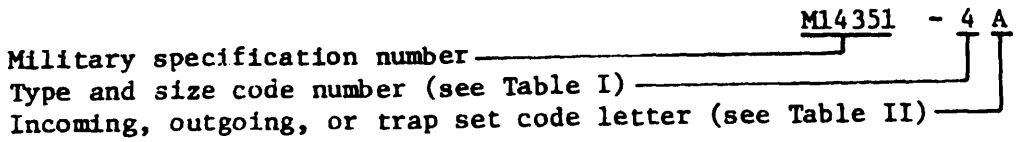


TABLE I. Type and Size Code Number.

Size	Type I	Type II
6	1	3
8	2	4
12	-	5

TABLE II. Incoming, Outgoing, or Trap Sets Code Letter.

Incoming	A
Outgoing	B
Trap sets	C

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal' form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

QQ-S-781	- Strapping, Steel, and Seals.
WW-P-406	- Pipe, Steel (Seamless and Welded) (For Ordinary Use).
PPP-B-601	- Boxes, Wood, Cleated-Plywood.
PPP-P-40	- Packaging and Packing of Hand Tools.
PPP-T-60	- Tape: Packaging, Waterproof.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-P-116	- Preservation-Packaging, Methods of.
MIL-B-121	- Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-P-514	- Plates, Identification, Instruction and Marking, Blank.
MIL-T-704	- Treatment and Painting of Materiel.
MIL-C-10387	- Couplings, Clamp, Pipe; with Bolts and Synthetic-Rubber Gaskets for Grooved-End Pipe and Tube.
MIL-P-10388	- Pipe Fittings: One or More Ends Grooved.

STANDARDS

FEDERAL

FED-STD-H28/7	- Screw Thread Standards for Federal Services, Section 7, American Standard Pipe Thread (Except Dryseal and Hose Coupling Types).

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-130	- Identification Marking of US Military Property.
MIL-STD-810	- Environmental Test Methods.
MIL-STD-1188	- Commercial Packaging of Supplies and Equipment.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

B16.5 - Steel Pipe Flanges and Flanged Fittings.
B16.9 - Factory-Made Wrought Steel Buttwelding Fittings.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

AMERICAN SOCIETY OF MECHANICAL ENGINEERS (ASME)

Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

(Application for copies should be addressed to the American Society of Mechanical Engineers, 345 East 47th Street, New York, NY 10017.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 36 - Structural Steel.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

AMERICAN WELDING SOCIETY (AWS)

D1.1 - Structural Welding Code.

(Application for copies should be addressed to the American Welding Society, Inc., 2501 North West Seventh Street, Miami, FL 33125.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the currentversion before use.

3. REQUIREMENTS

3.1 Description. The pipeline barrel cleaner traps (hereinafter called "traps") (see 6.3 and Figures 1 through 5) shall consist of a barrel with inlet and outlet connections and an end cover to facilitate insertion and removal of the pipeline cleaning elements. The traps shall be furnished individually, or as a set consisting of one incoming trap and one outgoing trap.

3.2 First article (first produced traps). The contractor shall furnish one trap set, one incoming trap, or one outgoing trap, as specified (see 6.2), for examination and testing within the time frame specified (see 6.2), to prove prior to starting production that his production methods and choice of design detail will produce traps that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.4).

3.3 Material. Material shall be as specified herein. Materials not specified shall be selected by the contractor and shall be subject to all provisions of this specification (see 6.8).

3.4 Threads. Screw threads shall be American Standard Pipe Threads (NPT) conforming to FED-STD-H28/7.

3.5 Construction.

3.5.1 Structural steel. Structural steel shapes shall be in accordance with ASTM A 36.

3.5.2 Pipe and pipe nipples. Pipe and pipe nipples shall be seamless pipe conforming to WW-P-406, Weight A, Class 1. Pipe shall be furnished with bevel ends for welding, and all sizes shall withstand a hydrostatic test pressure of not less than 1440 pounds per square inch (psi).

3.5.3 Couplings. Couplings shall conform to MIL-P-10388, grooved on one end and beveled on the other end.

3.5.4 Flanges. Flanges shall be in accordance with ANSI B16.5, Class 400.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the currentversion before use.

3.5.5 Reducers. Reducers shall be concentric forged steel fittings in accordance with ANSI B16.9. Swaging of the pipeline barrel is acceptable as an alternate to a forged reducer, subject to the following:

(a) Metal shall be hot-worked in compression.
(b) There shall be no sharp shoulders, internal weld flash, fissures, or burrs on the inside of the pipe.
(c) Final dimensions of the swaged end shall be compatible with the connecting pipe sections or flanges.
(d) Wall thickness of the swaged section shall be the same as the connecting pipe sections or flanges.
(e) Swaged end shall be beveled for welding.

3.5.6 End closure assembly. All traps, except the Type I, Size 6-inch trap, shall be provided with a hinged blanking end closure. The closure shall be steel, and shall be butt-welded to the pipeline barrel. Sealing shall be by a petroleum-fuel-resistant-type gasket of hardness conforming to the Grade 2 coupling gasket requirements of MIL-C-10387, to preclude fuel leakage. The hinge shall support the cap or blanking plug in the open position, shall provide unobstructed access to the end of the barrel, and shall be as shown on Figures 2, 3, 4, and 5.

3.6 Performance.

3.6.1 Hydrostatic. The traps shall withstand an internal hydrostatic test pressure of not less than 1440 psi without leakage or permanent deformation or damage to any part or component when tested as specified herein.

3.6.2 Barrel and end closure assembly. The barrel and end closure assembly shall be designed for a minimum safety factor of 3 based upon a 960 psi working pressure. If any special tools are required to operate the closure, such tools shall be provided and shall be captive-chained to the closure or barrel in such a way as to allow operation of the closure without damage to or interference with any other component when tested in accordance with 4.5.2.3.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the current version before use.

3.7 Environmental conditions.

3.7.1 Operational temperatures. The traps shall be functionally operable for their intended use as specified herein and in the following ambient conditions:

(a) Low - minus 30° F plus or minus 5° F (minus 34° C plus or minus 3° C), for not less than 6 hours with negligible solar radiation.

(b) High - Plus 125° F plus or minus 5° F (plus 52° C plus or minus 3° C), for not less than 1 hour at no solar radiation.

3.7.2 Storage temperatures. The traps shall not be adversely affected or damaged when stored under the following ambient conditions:

(a) Low - minus 30° F plus or minus 5° F (minus 34° C plus or minus 3° C), for not less than 6 hours with no wind and relative humidity tending toward saturation.

(b) High - plus 160° F plus or minus 5° F (plus 71° C plus or minus 3° C), for not less than 1 hour with negligible wind and relative humidity 10 to 85 percent.

3.8 Identification marking. The traps shall be identified in accordance with MIL-STD-130. The marking shall be applied on 4 inch x 6 inch plates conforming to MIL-P-514, Type III, Composition C, of Type I, Grade A, Class 1 material.

3.9 Treatment and painting. The exterior of the traps shall be cleaned, treated, and painted in accordance with MIL-T-704, Type A. Color shall be at the option of the contractor. The interior surfaces of the traps shall be cleaned but shall not be treated and painted.

3.10 Type I grooved-ends. The grooved-end configuration shall be in accordance with MIL-P-10388.

3.10.1 Size 6-inch. The 6-inch grooved trap shall be in accordance with Figure 1 and as specified herein. Each trap shall be furnished with an 8-inch grooved blanking end cap in accordance with MIL-P-10388 and an 8-inch coupling in accordance with MIL-C-10387.

Source: https://assist.dla.mil -- Downloaded: 202640-18T03:04Z
Check the source to verify that this is the currentversion before use.

3.10.2 Size 8-inch. The 8-inch grooved trap shall be in accordance with Figure 2 and as specified herein.

3.11 Type II traps-flanged ends. The Type II traps shall be skid mounted. The skids shall be provided with upturned ends to allow for towing and lifting of the traps. End rails and barrel supports shall be 2-inch nominal size pipe. Barrel supports shall be radial from the centerline of the traps and shall be gusseted at the skid base. No part or component of the traps shall overhang the skid base, with the exception of the 12-inch-size trap. The skid base for the 12-inch-size trap shall extend to the end of the barrel with the hinged portion of the closure removed.

3.11.1 Size 6-inch. The 6-inch traps shall be in accordance with Figure 3 and as specified herein. The skid siderails shall be fabricated from 4-inch steel channels.

3.11.2 Size 8-inch. The 8-inch traps shall be in accordance with Figure 4 and as specified herein. The skid siderails shall be fabricated from 4-inch steel channels.

3.11.3 Size 12-inch. The 12-inch traps shall be in accordance with Figure 5 and as specified herein. The skid siderails shall be fabricated from 4-inch-wide flange beams.

3.12 Workmanship.

3.12.1 Metal fabrication. Metal used in the fabrication of the trap shall be free from kinks and sharp bends. The straightening of material shall be done by methods that will not cause damage to the metal. Flame-cutting, using a tip suitable for the thickness of the metal, may be employed instead of shearing or sawing. Burned surfaces of flame-cut material shall be ground or machined to remove ash and cooling checks. All bends of major character shall be made with metal dies or fixtures to insure uniformity of size and shape. Precautions shall be taken to avoid overheating, and heated metal shall be allowed to cool slowly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

3.12.2 Bolted or pin connections. Boltholes shall be accurately formed and shall have the burrs removed. Washers or lockwashers shall be provided where essential. Matching thread areas of securing bolts shall withstand the tensile strength of the bolt. All fasteners shall be correctly torqued and shall have full thread engagement.

3.12.3 Castings. Castings shall be sound and free from blowholes patching, misplaced coring, warping, and other defects which might render the castings unsound or unsuitable for their intended use.

3.12.4 Welders and welding.

3.12.4.1 Welders. Before assigning any welder to manual welding work covered by this specification, the contractor shall provide the contracting officer with certification that the welder has passed qualification tests as prescribed by either of the following listed codes for the type of welding operations to be performed and that such qualification is effective as defined by the particular codes:

AWS D1.1, Structural Welding Code, Section 5, Qualification.
ASME, Boiler and Pressure Vessel Code, Section IX, Welding Qualifications.

Contractors who make only horizontal welds need not qualify welders for "all position welding". Subject to approval by the Government, the contractor's standard welder qualification may be substituted in lieu of the above codes provided that the contractor's procedure is equivalent to the above codes. The contractor shall be responsible for determining that automatic welding equipment operators are capable of producing quality welds in accordance with AWS or ASME codes.

3.12.4.2 Steel weldments. The surfaces and edges of parts to be welded, including layers of weld materials when multiple layers are required, shall be free from oxide scale, paint, lubricant, and other foreign matter. Welds shall transmit stress to the heat-affected zone without permanent deformation or failure when the parts connected by the welds are subjected to proof and service loading. All welded parts shall be free from cracks, porosities and other imperfections that may reduce the effectiveness of the part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

3.12.4.3 Steel welding. Steel welding shall be done by the shielded-electric-arc method or metal-inert-gas (MIG) process in accordance with qualification procedures prescribed in 3.12.4.1, or by any other method providing equivalent mechanical properties of the filler-metal-to-base-metal combinations. Where embrittlement of the joined metal may result, preheating, annealing or both shall be employed. Work shall be positioned for flat welding whenever practicable. Complete and uniform penetration and fusion of the metals shall be obtained on all welds.

3.12.4.4 Rewelding defects. Portions of welded joints that have been rejected on inspection because of defects specified in 3.12.4.3 may be repaired only by rewelding. The defective weld shall be removed by chipping or machining. Before rewelding, the joint shall be inspected to assure that all the defective weld has been removed and that the joint is accessible so that the welding operator can obtain full preparation and fusion through the joint.

3.12.4.5 Jigs and fixtures. Components, except minor parts, shall be assembled in jigs or frames and welded while held in the correct position. Jigs or frames shall be designed to minimize distortion of the parts being welded.

3.12.5 Cleaning. The traps shall be thoroughly cleaned of all machining oil, residue of tests, grease, dirt, metal shavings and filings, and other contaminants. Cleaning shall be accomplished in a manner that will not leave a residue or otherwise render the traps unsuitable for their use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

4.1.1 Component and material inspection. The contractor is responsible for insuring that components and materials used are manufactured, examined, and tested in accordance with referenced specifications and standards, as applicable.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First produced traps inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First produced traps inspection.

4.3.1 Examination. The first produced traps shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.3.2 Tests. The first produced traps shall be tested as specified in 4.5.2.1 through 4.5.2.3. Failure of any test shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Examination. Each trap shall be examined as specified in 4.5.1. Presence of one or more defects shall be cause for rejection.

4.4.2 Test. Each trap shall be tested as specified in 4.5.2.2. Failure of this test shall be cause for rejection.

4.5 Inspection procedure.

4.5.1 Examination. The traps shall be examined as specified herein for the following defects:

Major

101. Fabrication not in accordance with applicable figures.
102. Dimensions not as specified.
103. Materials not as specified.
104. Threads not as specified.

Source: https://assist.dla.mil -- Downloaded: 202640-18T03:04Z
Check the source to verify that this is the currentversion before use.

105. Pipe, pipe nipples, couplings, flanges, and reducers not as specified.
106. Barrel and end closure assembly not as specified.
107. Workmanship not as specified.

Minor

201. Identification marking incorrect, incomplete, illegible or missing.
202. Treatment and painting not as specified.

4.5.2 Tests.

4.5.2.1 Environmental conditions. Unless otherwise specified herein, one trap set, one incoming trap, or one outgoing trap (see 3.2) shall be tested in an environmental chamber for the conditions specified in 3.7. The traps shall be tested for high temperatures in accordance with MIL-STD-810, Method 501.1, Procedure I, excepting Steps 5 and 7. The traps shall be tested for low temperatures in accordance with MIL-STD-810, Method 502.1, Procedure I, excepting Steps 5 and 7. Nonconformance to 3.7 shall constitute failure of this test. When specified (see 6.2), the contractor shall furnish to the contracting officer, in lieu of testing, a certification that the traps meet the environmental condition requirements specified in 3.7 and have been previously tested in accordance with 4.5.2.3. A report of the test results shall be furnished to the contracting officer at the time of shipment.

4.5.2.2 Hydrostatic. Each trap shall be hydrostatically tested at not less than 1440 psi for a period of not less than 5 minutes. During the test, all welds shall be struck in not less than three places with a flat-faced hammer. Nonconformance to 3.6.1 shall constitute failure of this test.

4.5.2.3 Barrel and end closure assembly. Unless otherwise specified (see 6.2), each barrel and end closure assembly shall be hydrostatically tested at not less than 2680 psi (safety factor of 3) for not less than 5 minutes. Nonconformance to 3.6.2 shall constitute failure of this test.

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the current version before use.

4.6 Inspection of packaging.

4.6.1 Preproduction pack inspection.

4.6.1.1 Examination. The preproduction pack shall be examined for the defects specified in 4.6.2.3. Presence of one or more defects shall be cause for rejection.

4.6.2 Quality conformance inspection of pack.

4.6.2.1 Unit of product. For the purpose of inspection, a completely processed pack prepared for shipment shall be considered a unit of product.

4.6.2.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.2.3 Examination. Samples selected in accordance with 4.6.2.2 shall be examined for the following defects. AQL shall be 2.5 percent defective.

108.	Materials, methods, and containers not as specified. Each incorrect material, method, or container shall be considered one defect.
109.	Preservation not as specified for Level A.
110.	Disassembly not as specified for Level A.
111.	Openings not sealed as specified for Level A.
112.	Wrenches and tools not preserved as specified for Level A.
113.	Packing not as specified for Level A and Level B.
114.	Marking illegible, incorrect, incomplete, or missing.

5. PACKAGING

5.1 Preproduction pack. The contractor shall furnish a preproduction pack for examination and testing within the time frame specified (see 6.2) to prove prior to starting production packaging that the applied preservation, packing, and marking comply with the packaging requirements of this specification. Examination and tests shall be those specified in Section 4 and shall be subject to the surveillance and approval by the Government (see 6.5). The preproduction pack may be prepared utilizing either the first produced trap or a production trap. When the first produced trap is utilized, any preservation and packing shall be removed by the contractor at no expense to the Government, when requested by the Government, to facilitate comparison between the first produced trap and production traps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

5.2 Preservation. Preservation shall be Level A or Commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Disassembly. The closure hinge shall be removed from the 12-inch flanged cleaner trap and secured to the trap.

5.2.1.2 Preservatives. Preservatives specified herein shall conform to the applicable specification listed in and shall be applied in accordance with MIL-P-116.

5.2.1.3 Interior surfaces. The interior surfaces of the traps shall be coated with Type P-10 preservative to assure complete coverage of the entire interior and the flanged or grooved areas. The excess preservative shall be drained through the bottom drain opening. All openings shall be sealed with barrier material in accordance with MIL-B-121, Type I, Grade A, Class 2, and secured with tape in accordance with PPP-T-60, Type IV.

5.2.1.4 Wrenches and tools. The wrenches and tools shall be preserved in accordance with the applicable requirements of PPP-P-40.

5.2.2 Commercial. Commercial preservation shall be in accordance with MIL-STD-1188.

5.3 Packing. Packing shall be Level A, Level B, or Commercial as specified (see 6.2).

5.3.1 Level A. Each complete trap, with wrenches and tools, shall be packed in a close-fitting cleated-plywood box conforming to PPP-B-601, Overseas Type, style optional, with skids. The trap shall be secured within the box so as to prevent movement. The box shall be reinforced in accordance with the appendix to the box specification with flat steel strapping conforming to QQ-S-781, Type I or IV, size not less than 0.023 inch thick x 0.50 inch wide. Unless otherwise specified herein, strapping shall be Finish B. When specified (see 6.2), strapping shall be Finish A.

5.3.2 Level B. The traps, with wrenches and tools, shall be packed as specified in 5.3.1, except that the boxes shall be Domestic Type.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

5.3.3 Commercial. Commercial packing shall be in accordance with MIL-STD-1188.

5.4 Marking. Marking for shipment and storage shall be in accordance with MIL-STD-129 for military protection. Commercial marking shall be in accordance with MIL-STD-1188.

6. NOTES

6.1 Intended use. The incoming and outgoing pipeline barrel cleaner traps are intended for use with pipeline station manifolds as part of a terminal for pipeline cleaning elements. The Type I traps are for use with 6- and 8-inch low-pressure trunk pipelines. The Type II traps are for use with 6-, 8-, and 12-inch high-pressure trunk pipelines.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Definitive Military Specification part number required (see 1.2.1).
(c) Time frame required for submission of first produced traps, and whether a trap set, incoming trap or outgoing trap is required (see 3.2).
(d) When certification of compliance will be accepted in lieu of environmental testing (see 4.5.2.1).
(e) When hydrostatic testing of barrel and end closure assemblies is not required (see 4.5.2.3).
(f) Time frame required for submission of the preproduction pack (see 5.1).
(g) Degree of preservation and degree of packing required (see 5.2 and 5.3).
(h) When strapping shall be Finish A (see 5.3.1).

6.3 Figures. Figures 1 through 5 delineate configurations and critical dimensions of the traps that shall be complied with; however, the figures do not preclude a different method of fabrication and choice of design provided that all other requirements of this specification are met (see 3.1).

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the current version before use.

6.4 First produced traps. Any changes or deviations of production traps from the approved first produced traps during production will be subject to the approval of the contracting officer. Approval of the first produced traps will not relieve the contractor of his obligation to furnish traps conforming to this specification (see 3.2).


6.5 Preproduction pack. Any changes or deviations of production packs from the approved preproduction pack will be subject to the approval of the contracting officer. Approval of the preproduction pack will not relieve the contractor of his obligation to preserve, pack, and mark the traps in accordance with this specification (see 5.1).

6.6 Data requirements. The contracting officer should include requirements for such data as technical publications, instructional materials, illustrated parts lists, and contractor's maintenance and operation manual to be furnished with each trap.

6.7 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools, as necessary (including any special tools), and instructions on shipment of traps.

6.8 Recycled material. It is encouraged that recycled material be used, when practical, as long as it meets the requirements of this specification (see 3.3).

6.9 Definitive military specification part number. The military specification part number corresponds to the type and size code number, and to the individual traps or trap sets code letter of pipeline cleaners covered by this specification. The specification number, the type and size code number, and individual traps or trap sets code letter are combined to form the definitive military specification part number as shown below:

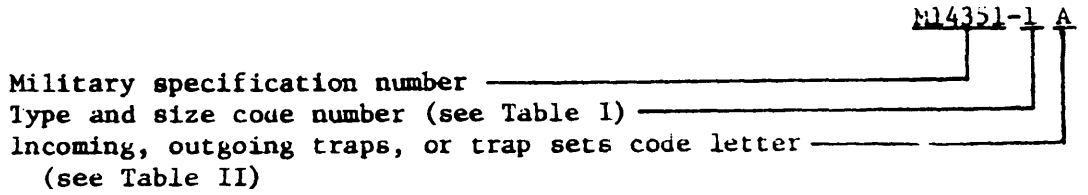

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the current version before use.

Custodian:
Army - ME

Preparing activity:
Army - ME

Project 4730-A939

Review activity:
DLA - CS

User activity:
Army - CE

☆U.S. GOVERNMENT PRINTING OFFICE: 1979-603-022/4803

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

DESCRIPTION	DIM A
OUTGOING	12.000
INCOMING	48.000

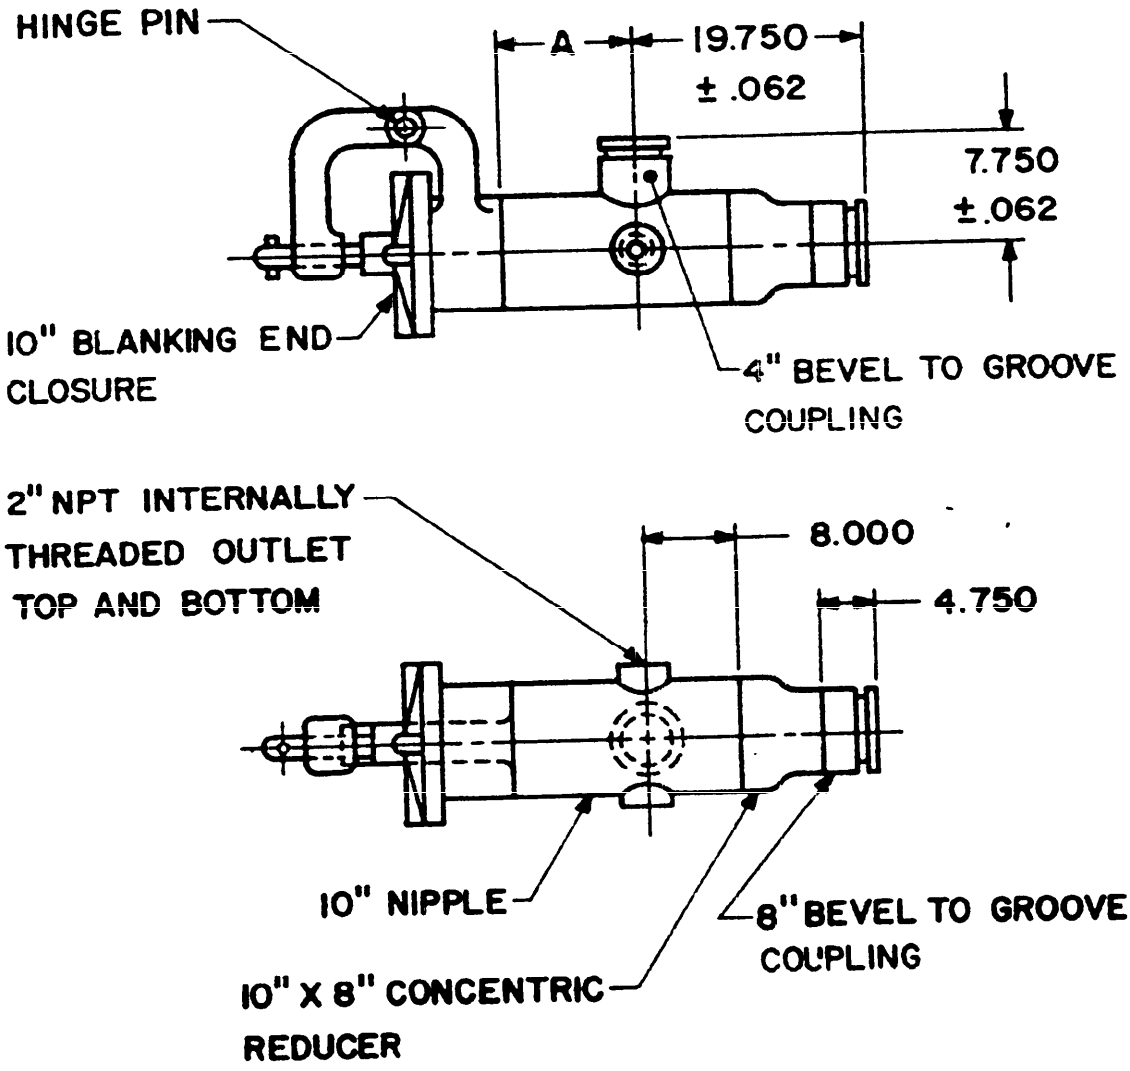


FIGURE 2. 8 inch grooved cleaner traps.

X-647A

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the currentversion before use.

DESCRIPTION	DIM A	DIM B
OUTGOING	12.00	17.00
INCOMING	36.00	40.00

UNLESS OTHERWISE SPECIFIED
TOLERANCES ± 06

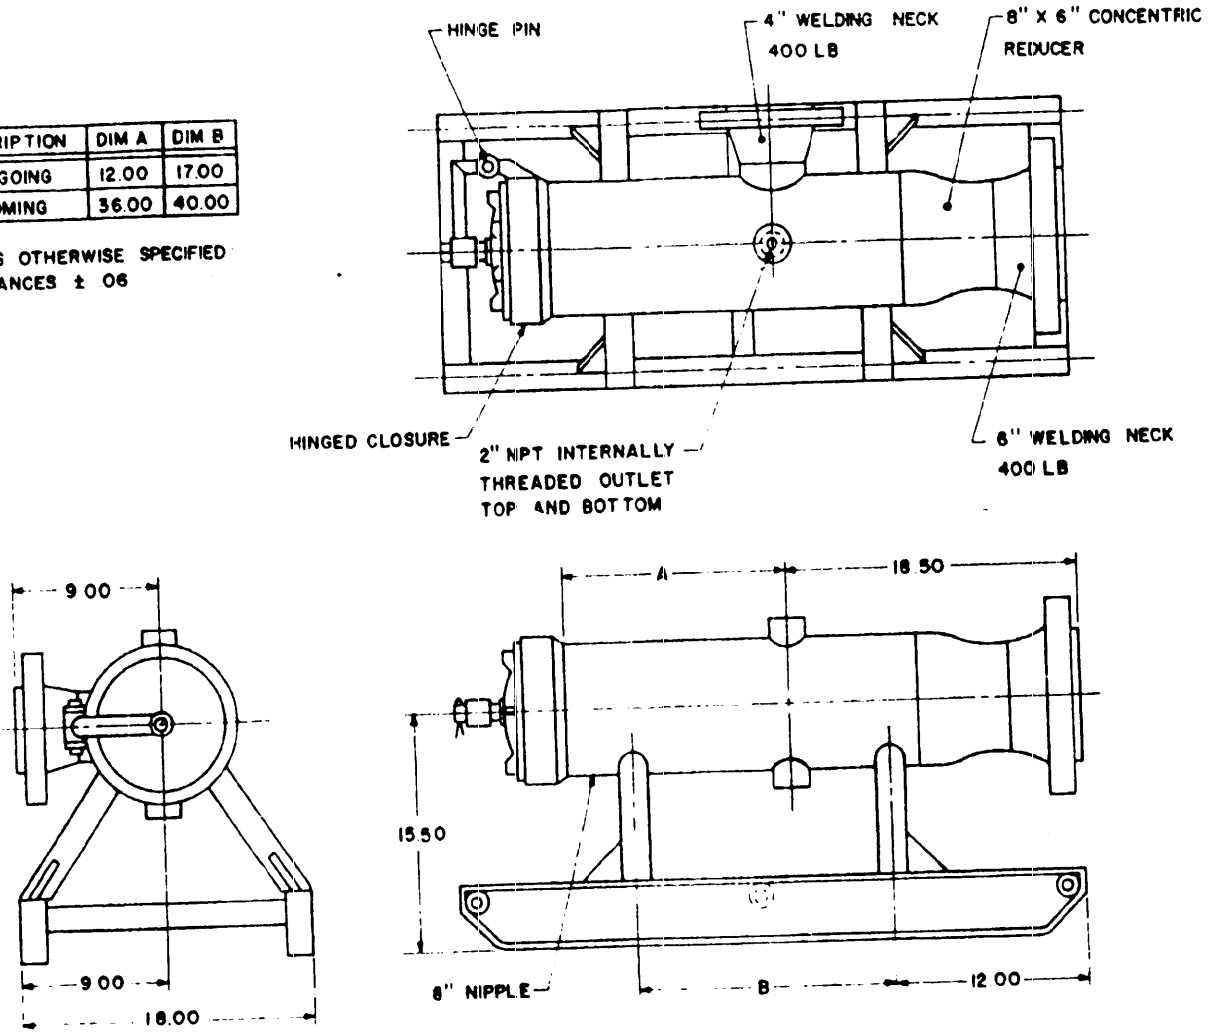


FIGURE 3. 6 inch flanged cleaner traps.

X-648

Source: https://assist.dla.mil -- Downloaded: 20260-18T03:04Z
Check the source to verify that this is the current version before use.

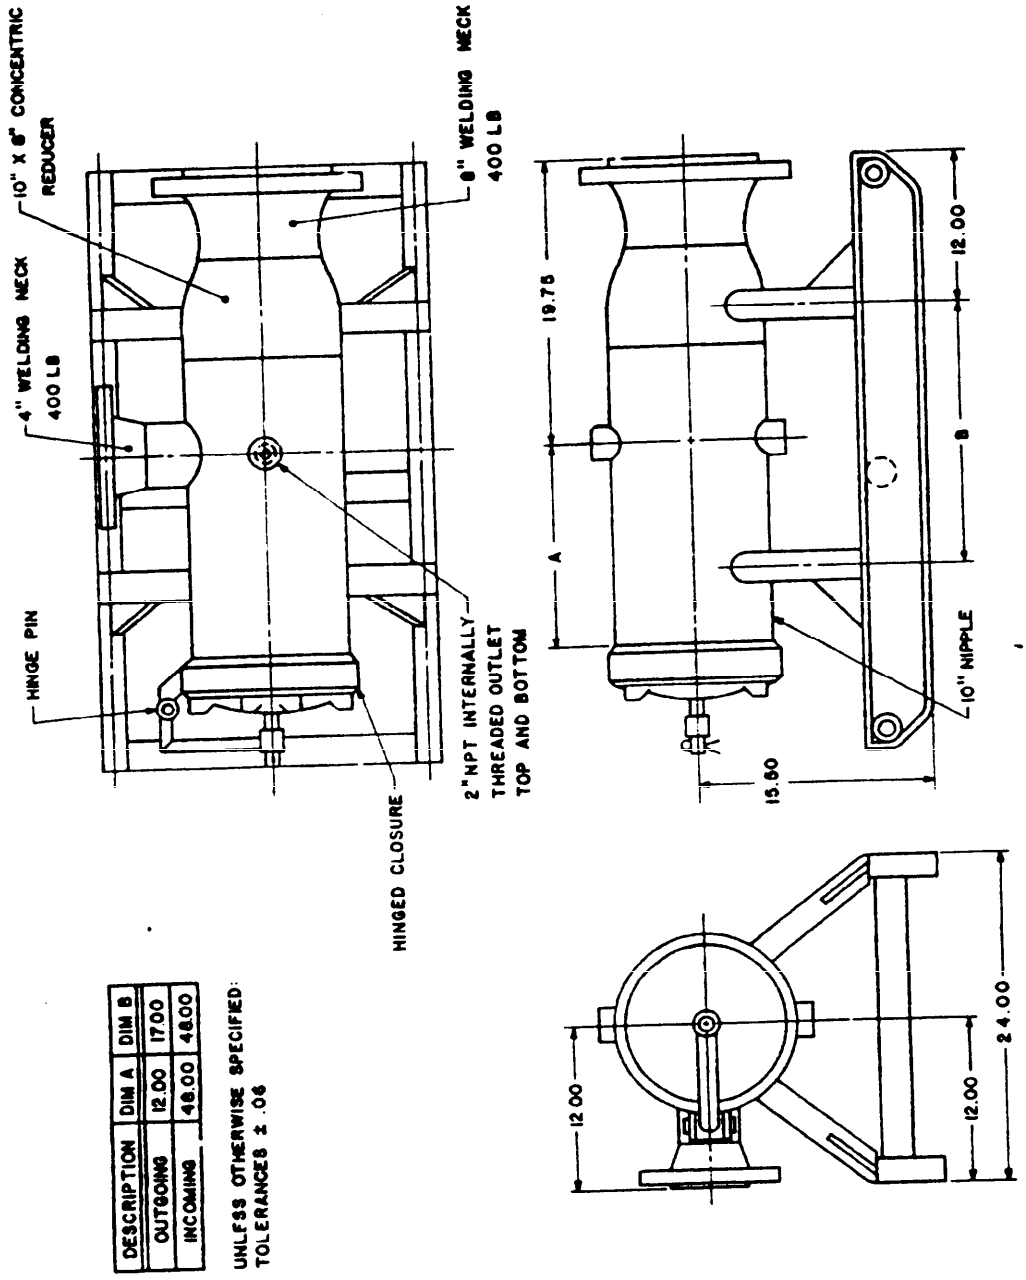


FIGURE 4. 8 inch - flanged cleaner traps.

X-649

Source: https://assist.dla.mil -- Downloaded: 202610-18T03:04Z
Check the source to verify that this is the currentversion before use.

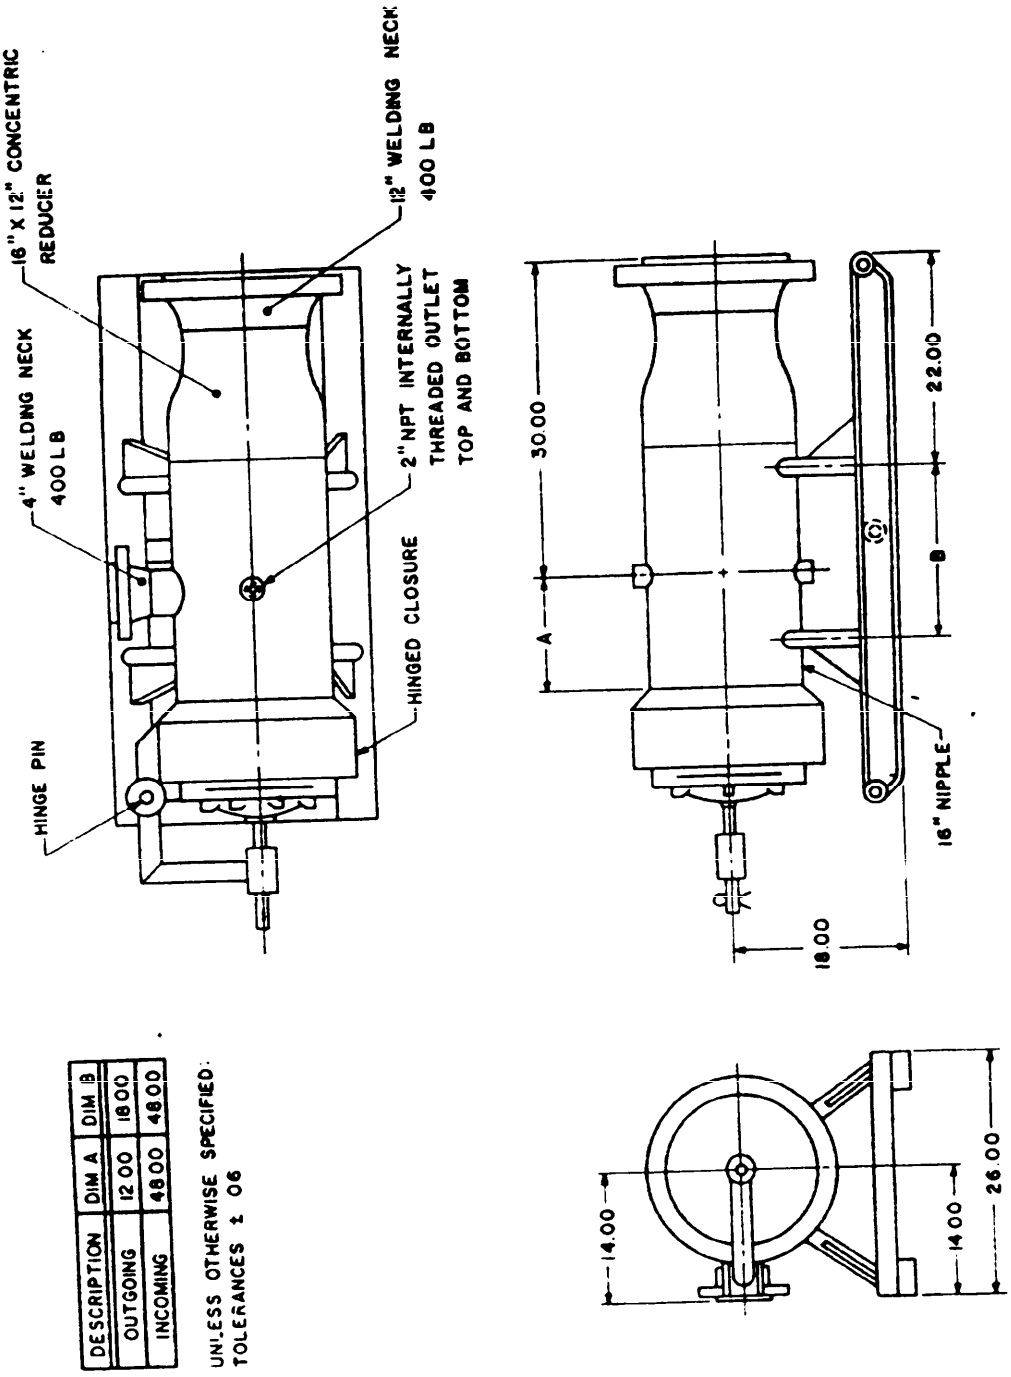


FIGURE 5. 12 inch flanged cleaner traps.

X-650

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-P-14351D(ME) Pipeline Barrel, Cleaner Trap: Incoming and Outgoing

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T03:04Z
Check the source to verify that this is the current version before use.