AA-B-00540D (GSA-FSS)
August 1, 1978
SUPERSEDING
AA-B-00540C (GSA-FSS)
August 21, 1974

INTERIM FEDERAL SPECIFICATION

BOOKCASE SECTIONS, BASE AND TOP, STEEL, CONTEMPORARY STYLE

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington DC 20406, based on currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers steel bookcase sections (with doors and without doors), base and top which are designed to interlock to form a stable and rigid bookcase (see 6.1).

1.2 Classification.

1.2.1 Types, styles and sizes. The bookcase units shall be of the following types, styles and sizes, as specified (see 6.2).

Type I - Bookcase section

Style A - With glass receding door

Style B - Without door

	Maximum Outside Dimensions			Minimum Inside Clear Dimensions		
	Width	Depth	Height	Width	Depth	Height
Size 1	33"	13"	17-1/4"	31"	12"	14"
Size 2	33"	13"	15-1/4"	31"	12"	12"
Size 3	33"	13"	13-1/4"	31"	12"	10"

Type II - Base section

Outside dimensions: 33 inches wide, 13 inches deep, 7 inches high

Type III - Top section

Outside dimensions: 33 inches wide, 13 inches deep, 3/4 inches high

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein.

Federal Specifications:

QQ-C-320 - Chromium Plating (Electrodeposited).
QQ-N-290 - Nickel Plating (Electrodeposited).
QQ-P-416 - Plating, Cadmium (Electrodeposited).
QQ-R-571 - Rods, Welding, Copper and Nickel Alloys.
TT-C-490 - Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
PPP-B-636 - Boxes, Shipping, Fiberboard.
PPP-F-320 - Fiberboard; Sheet, Stock and Cut Shapes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 187 - Identification of Pressed Bends, Forms, Seams and Joints, (Sheet Metal).
Fed. Std. No. 595 - Colors.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Forth Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Iron and Steel Institute, (AISI) Publication:

Steel Products Manual, Carbon Steel Sheets

(Application for copies should be addressed to American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

American National Standards Institute (ANSI) Inc. Standard:

Z97.1 - Performance Specifications and Methods of Test for Transparent Safety Glazing Material Used in Buildings.

(Application for copies may be addressed to American National Standard Institute, 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

American Society for Testing and Materials (ASTM) Publications:

B-117 - Standard Method of Salt Spray (fog) Testing.
D-523 - Specular Gloss.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of each type, style and size of the finished commodity on contract and each component part shall be submitted or made ready for contracting officer or his authorized representative to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval from the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. They shall be unused in their present state and free from defects which affect servicability or appearance of the finished product. The end item(s) shall contain not less than 20 percent by weight of recovered materials, excluding packaging. Recovered materials are defined as material which has been collected or recovered from solid waste. Solid waste is defined as any garbage, refuse, sludge from a waste treatment plant, water supply treatment plant, or air pollution control facility and other discarded material, including solid, liquid, semisolid, or contained gaseous material resulting from industrial, commercial, mining, and agricultural operations, and from community activities, but does not include solid or dissolved material domestic sewage, or solid or dissolved materials in irrigation return flows or industrial discharges.

3.2.1 Steel.

3.2.1.1 Steel sheet. Steel sheets used for the top section and the sides and back of the bookcase section shall be commercial quality cold rolled steel with a stretcher leveled standard of flatness as defined in Steel Products Manual, Carbon Steel Sheets. Other sheets may be cold rolled oiled, or hot rolled pickled and oiled, or hot rolled annealed. The steel shall be smooth, free from rust, scale, pits, scratches, laps and buckles affecting strength or appearance. The gage numbers specified are the manufacturer's standard gages for steel. The decimal equivalents shown for the steel thicknesses are subject to the standard tolerances or ordering limits.

3.2.1.2 Steel tubing. The tubular steel shall be commercial quality SAE 1010-1020 cold rolled steel. It shall be seamless or continuously seam welded. The outside vertical corners of the tubing shall be rounded but the radii shall not exceed 1/16 inch. The steel tubing shall be smooth, free from rust, scale, pits and scratches, affecting strength or appearance. The gage numbers specified are the manufacturer's standard gages for steel. The decimal equivalents shown for the steel thicknesses are subject to the standard tolerances or ordering limits.

3.2.2 Tempered glass door panels. The glass used in the doors of the Style A bookcase section shall be transparent tempered glass as defined in ANSI Standard ANSI Z97.1 and shall conform to the requirements specified herein. Each panel of tempered glass shall be transparent in its entire area except it shall be permanently marked in one corner as specified in 5.1.1 of ANSI Z97.1. The glass panel shall be not less than 1/8 inch thick. The four edges of the panel shall be clean cut and wiped smooth.

3.2.3 Finishing materials.

3.2.3.1 Primer. The primer, when used, shall be compatible with the finishing enamel specified in 3.2.3.2.

3.2.3.2 Enamel. The enamel for the finishing shall be the baking type in accordance with the manufacturer's commercial product.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.2.3.2.1 Color Unless otherwise specified (see 6.2) the color of finish for the Type I and Type III bookcase sections specified herein shall be a color from the following list of colors selected from Fed. Std. No. 595, (see 6.4).

Gray	-	No. 26134
Black	-	No. 27040
Parchment	-	No. 27769

The steel glazing strip specified in 3.3.7.2 which is not visible on the front of the door may be finished in black enamel.

3.2.3.3 Chromium and cadmium plating. The materials used in the plating process shall be as normally used commercially to accomplish the thickness and quality specified herein (see 3.4.2).

3.2.4 Fastening devices. Unless otherwise specified herein, all bolts, nuts, screws, washers and other fastening devices shall be of the type, style and size normally used commercially for the purpose intended and shall be made corrosion resistant in accordance with the manufacturer's commercial practice. The use of paint or lacquer as the sole corrosion inhibitor is prohibited. Adhesive is not permitted as a fastening device.

3.2.5 Leg glides. All leg glides shall be capable of adjusting the height of the bookcases not less than 3/4 inch from the flush position. The base of the glides shall be the same configuration as the legs or they shall be round. The edges of the square glides shall not extend beyond the edges of the legs more than 1/16 inch. The edges of the round glides shall not extend beyond the corners of the legs. The base of the glides shall be of metal or of high impact ABS clear plastic. The plastic base shall be at least 1/8 inch thick in the pad area. Metal bases shall be satin finished cadmium plated in accordance with 3.4.2.2 or satin finished chromium plated in accordance with 3.4.2.1. The glides shall be capable of being easily adjusted by hand without the use of any tools.

3.2.6 Identification label. The identification label shall be rectangular, minimum 2-1/2 inches by 1-1/2 inch, with corners rounded and all white in color. The adhesive shall be the permanent type. The label shall be legibly marked in permanent dark ink with the contractor's name or trademark, contract or order number, item stock number and year of manufacture.

3.3 Construction. The construction requirements specified herein are minimum. The contractor will exceed these requirements (without altering the general configuration, basic design concept or primary construction specified or illustrated) wherever necessary to conform to the test provisions specified in 4.5. Any detail not specified shall be consistent with good quality production of similar commercial products. All elements of construction shall be free of any condition which hinder the proper functioning of any part of the bookcase or which constitutes a potential hazard to personnel or their clothing.

3.3.1 Fabricating terms. All bends, forms, seams and joints of the metal specified herein shall be as defined in Fed. Std. No. 187. The bends and folds in the formations specified are the minimum number of bends and folds permitted.

3.3.2 Spot welding. Spot welds shall be not closer to the edge of either adjoining member than 1/2 the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds. The greatest depth permitted on depressed spot welds on exterior surfaces is 1/64 (0.015) inch. Excessively depressed spot welds and cratered spot welds shall be filled, ground smooth and enamel finished so as to blend with the enamel finish of the units. Except as otherwise specified herein, spot welds shall be centered no more than six inches apart.

3.3.2.1 Brazing. When brazing is used in lieu of welding to join component parts, the brazing method shall include the use of nickel-bronze rod conforming to Type I, Class RBCu2n-B of QQ-B-671 and shall have a tensile strength of at least 70,000 p.s.i. When brazing is used simply as a filler, the brazing method may include the use of another rod having adequate tensile strength to assure that the brazed area will not crack or fracture under shipping, moving, or in-use conditions. Brazed areas shall be smooth to assure an acceptable finish.

3.3.3 Design. The design and dimensions of the bookcase sections, base section, and top section shall be as shown in attached drawings and as specified in the detailed requirements of this specification.

3.3.4 Intermembering of bookcase sections, bases and tops. All bookcase sections shall fit properly with each other and with the bases and tops. Interlocking devices shall be provided on all sections and bases to prevent disengagement of any unit during use.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

place of the cabinet top ... The front of the back shall extend beyond the outer sur

3.3.5 Dimensions. The overall dimensions of the bookcase section, base and top shall be as specified in 1.2.1 and in Figure 1. The net usable inside space of the Type I, Style A, bookcase section shall be not less than the minimum inside dimensions specified in 1.2.1 and in Figure 1. The minimum inside height shall be a measurement of the space from the inside bottom to the lowest surface of any part or mechanism extending below the inside face of the door frame when in the open position, or to the inside face of the door frame in the open position if no mechanism or part extends below the inside face of the door frame when in the open position. Measurement of the inside height of the Type I, Style B, bookcase sections shall be taken from the inside bottom to the lower edge of the top rail.

3.3.5.1 Tolerances. Maximum outside dimensions shall have a plus 0 tolerance and minimum inside clear dimensions shall have a minus 0 tolerance. Unless otherwise specified herein a plus or minus tolerance of 1/32 inch is permitted for other dimensions, provided fitting together of the bookcase sections, bases, and tops is not adversely affected. The bookcase sections, bases, and tops shall fit together in proper alignment when assembled, and shall not protrude beyond, or inset, other bookcase sections, bases and tops more than 1/16 inch on sides, front, or back.

3.3.6 Assembly. All mechanical and welded attachments shall produce secure, rigid joints and connections in proper alignment. All brazing and welding shall be neatly accomplished and free of cracks, pits and spatter. All exposed brazing and welding shall be ground smooth. The assembly shall provide rigid sections, bases and tops.

3.3.7 Bookcase section, Type I, Style A (with glass receding door). The design and dimensions shall be as shown in Figure 1. Construction, dimensions and gages of steel shall be as shown in Figures 2, 3, and 4 and may be method "A" of Figure 2 or method "B" of Figure 3, or any combination thereof. The ends of the section shall be double-wall construction. The back panel and outer end panels shall be one-piece construction as shown in Figure 3 or three-piece constructions shown in Figure 2. The top panel shall have a reinforcing member as shown in Figure 2 or Figure 3. The front edge of the reinforcing member may be formed upward and inward in a flat fold as illustrated in Figure 5 and Figure 6. The flange of the flat fold shall be not less than 1/4 inch wide and shall extend along the entire exposed front of the cabinet. The rear flange and center formation of the top reinforcing member shall be spot welded to the top panel on not more than 4 inch centers. The bottom panel shall have two reinforcing hat sections as shown in Figure 4. The bottom reinforcing hat sections shall be spot welded to the bottom panel on not more than 4 inch centers. The ends of each hat section shall be formed offset and shall be spot welded to the flanges of the end panels. The side edges of the bottom panel shall be spot welded to the flanges of the end panels. The rear edge of the bottom panel shall be formed in a flange and shall be spot welded to the back panel as shown in Figure 4 on not less than 4 inch centers. The four front and four back corners and seams as shown in Figure 7 shall be joined by brazing as specified in 3.3.2.1 and shall be ground smooth. The back of the bookcase sections may have screws inserted for the purpose of securing the inner end panel. The screws shall be no larger than No. 8 sheet metal screws. There shall be no more than four screws on the back of the bookcase section. Alternatively, the back of the bookcase sections may have blisters or embossments, or pierced half-round embossments (protruding into the interior of the bookcase) for the purpose of securing the inner end panel. Blisters or embossments shall be limited to two on each side of the back of the bookcase section and the diameter of each shall not exceed 3/8 inch.

3.3.7.1 Interlocking device. The bookcases shall be equipped with devices which shall lock the bookcase sections, base sections and top sections together to prevent accidental separation of the stacked units. Each bookcase section shall be equipped with two interlocking devices which shall be located 3½ inches ± ½ inch from each side of the unit to the center of the device at the rear edge of the top panel. Each base section shall be equipped with two interlocking devices which shall be located 3½ inches ± ½ inch from each side of the base on the rear member of the base sections. The interlocking devices shall be as specified in Figure 2 or Figure 3 for the bookcase section and as specified in Figure 10 for the base section. Alternate designs may be furnished provided gages of metal are the same and the function is equal to the above figures. No part of the interlocking device shall be removable by hand.

3.3.7.2 Door. The Type I, Style A, bookcase section shall be fitted with a door consisting of a frame constructed of not less than 20 gage (0.0359 inch) steel which supports a glass panel. The glass shall be as specified in 3.2.2. The width of the frame shall be equal on all four sides and shall be not less than 1-1/4 inches nor more than 1-1/2 inches in width. The frame shall be of one-piece construction or may be joined at the corners. Any joining shall be filled and ground smooth and shall give the appearance of one-piece construction. The glass shall be secured in the frame by means of steel glazing strips. There shall be a rubber channel around the glass or alternatively, there shall be rubber cushions which are not less than 9/16 inches long. Four of the rubber cushions shall be located along the top and two shall be located along each side of the frame. The door shall have a door-knob specified in 3.3.7.3 located in the center of the bottom rail of the frame. The door-knob shall not contact the front face of the bookcase section when the door is fully retracted into the case.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.7.3 Door knob. The design and dimensions of the door knob shall be either of the alternate designs in Figure 8 or, alternatively, shall have an externally threaded stem. The knob shall be constructed of satin finished anodized aluminum; Type 302 corrosion resistant steel; satin finished chromium on steel, die-cast zinc, brass or bronze. Tensile strength of die cast zinc shall be not less than 40,000 p.s.i.

3.3.7.4 Equalizer. The door shall operate smoothly on an equalizer which shall keep the door in an even position and prevent binding, sticking and metal-to-metal contact during the opening and closing operation. It shall consist of bars or rods, brackets, tracks, studs, hinges or rollers as required. During the entire opening and closing operation, the leading edge of door shall be on a parallel plane with the face of the case, within 1/8 inch.

3.3.8 Bookcase section, Type I, Style B (without door). The design and dimensions shall be as shown in Figure 1. Construction, dimensions and gages of steel shall be as shown in Figures 4, 5 and 7 and may be method "A" of Figure 5 or method "B" of Figure 7 or any combination thereof. The ends of the section shall be double-walled construction. The back panel and outer end panels may be one-piece construction as shown in Figure 6 or may be three-piece construction as shown in Figure 5. The linings of the end panels shall extend the full inside height of the bookcase section and shall be smooth and even without cutouts or indentations of any kind. The top panel shall have a reinforcing member as shown in Figure 5 or Figure 6. The front edge of the reinforcing member shall be formed upward and inward in a flat fold as illustrated in Figure 5 and Figure 6. The flanges of the flat fold shall be not less than 1/4 inch wide and shall extend along the entire exposed front of the cabinet. The rear flange and center formation of the top reinforcing member shall be spot welded to the top panel on not more than 4 inch centers. The bottom panel shall have two reinforcing hat sections as shown in Figure 4. The bottom reinforcing hat sections shall be spot welded to the bottom panel on not more than 4 inch centers. The end of each hat section shall be formed offset and shall be spot welded to the flanges of the end panels. The side edges of the bottom panel shall be spot welded to the flanges of the end panels. The rear edge of the bottom panel shall be formed in a flange and shall be spot welded to the back panel as shown in Figure 4 on not less than 4 inch centers. The top panel shall be spot welded to flanges of the end and back panels on not more than 4 inch centers. The four front and four back corners and seams as shown in Figure 7 shall be joined by brazing in accordance with Type I, Class RCuZn - D of QQ-R-571 as specified in 3.3.2.1 and shall be ground smooth. The back of the bookcase sections may have screws inserted for the purpose of securing the inner end panel. The screw shall be no larger than No. 8 sheet metal screw. There shall be no more than four screws on the back of the bookcase section. Alternatively, the back of the bookcase sections may have blisters or embossements or pierced half-round embossments (protruding into the interior of the bookcase) for the purpose of securing the inner end panel. Blisters or embossments shall be limited to two on each side of the back of the bookcase section and the diameter of each shall not exceed 3/8 inch.

3.3.8.1 Interlocking device. The interlocking device shall be as specified in 3.3.7.1.

3.3.9 Type II base section. The Type II base section shall be of knock-down construction as specified in 3.3.9.1 or it shall be a welded assembly as specified in 3.3.9.2.

3.3.9.1 Type II, base section, (knock-down construction). The design and dimensions shall be as shown in 3.2.1, Figure 1, Figure 9 and Figure 10. Each component part comprising the frame, corner posts, legs and intermembering and interlocking features shall be as indicated in Figures 9 and 10. The tubing for the legs and frame shall be 1 inch (± 1/32 inch) square with outside corner radii not to exceed 1/16 inch. The tubing shall be not less than 16 gage (0.0958 inch) steel as specified in 3.2.1.2. The four corner lock posts shall be cube-formed 1 cubic inch, to maintain and continue the rectilinear lines of the design shown in Figure 1. The cube-formed post shall have not less than three ridged or embossed extensions to provide an internal mechnical forced fit between the tubular joining members of the frame, legs, and posts. The bottom of the legs shall be equipped with glides specified in 3.2.5. The corner post may be of hollow 14 gage (0.0598 inch) steel or may be of solid diecast alloy. The tubes and corner posts shall be finely ground or wire brushed prior to the plating process to achieve a uniform satin chromium plated final finish as specified in paragraph 3.4.2.1. The outer measurement of the opposed sides of the ridged or embossed extensions of the corner posts shall be greater than the inner opposed sides of the tubes to assure the interface and forced fit required. All tubes shall be accurately and squarely cut to size and raw edges ground to permit a clear and square assembly of all components in the base. In addition to the forced fit specified, a locking screw threaded through the tubes shall inset and lock into each of the extensions of the corner posts and shall be concealed from normal view. Written and illustrated assembly instructions shall be packed with each knock-down base.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

3.3.9.2 Type II, base section (welded construction). The base section shall be of the dimensions specified in 1.2.1 and of the general configuration and dimensions specified in Figure 1. The base section shall consist (primarily) of four legs, a front tie member, rear tie member and two end tie members. These components shall be of not less than 16 gage (0.0598 inch) seamless steel tubing or continuous seam welded steel tubing as specified in 3.2.6.2. All exterior surfaces of these components shall be satin finished chromium plated as specified in 3.4.2.1. Alternatively, these components may be of seamless, 0.050 inch thick, No. 434 high tensile stainless steel tubing with a satin finish. All the above specified tubing shall be one inch square (± 1/32 inch) and the four outside corners shall be rounded but shall not exceed 1/16 inch radii. The above components shall be reinforced as necessary and shall be in proper alignment with each other and all joints shall be continuously welded or brazed to assure that the base section will support at least 375 pounds. The top of the base section shall be equipped with intermembering fittings as shown in Figure 10. The bottom of the legs shall be equipped with the glides specified in 3.2.5. All welded or brazed joints shall be smooth and free of pits, splatter, cracks and grind marks.

3.3.10 Type III, top section. The overall dimensions of the top section shall be as specified in Figure 1. The top section shall be constructed of not less than 18 gage (0.0478 inch) steel and shall be in accordance with Figure 11. The top section shall be formed from one piece of steel. The four corners and seams shall be secured by fusion welding or by brazing all corners and seams completely closed and grinding smooth. The top surface shall be smooth and even and shall be without holes or indentations.

3.4 Pretreatment and finishing.

3.4.1 Organic finish.

3.4.1.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces of the Type I bookcase section and the Type III top section (with the exception of the inside of the double-walled ends) shall be surface cleaned for painting in accordance with any of the methods specified in TT-C-490.

3.4.1.2 Priming. Unless Type I or Type II of TT-C-490 is used, all exterior and interior surfaces treated as specified in 3.4.1.1, shall be coated with primer specified in 3.2.3.1.

3.4.1.3 Enameling. All unplated pretreated surfaces shall be coated with the enamel specified in 3.2.3.2. The finish shall be baked at a time-temperature cycle recommended by the enamel manufacturer. The total dry film thickness on all exterior surfaces shall be not less than 1.1 mils. The total dry film thickness on all interior surfaces shall be not less than 0.8 mils. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grits, areas of thin film or no film, tackiness and separation of color. The specular gloss of the finish on exterior surfaces shall be within the range of 35 ± 5 units when measured in accordance with ASTM Test Method D-523.

3.4.2 Plated finishes.

3.4.2.1 Chromium plating. Chromium plating shall conform to Class 1, Type II of QQ-C-320. The under-plating shall conform to Class 1, Grade F of QQ-N-290. The exposed surfaces of the chromium shall visually match the GSA Standard Sample (see 6.4.2).

3.4.2.2 Cadmium plating. Cadmium plating shall be in accordance with Class 1, Type I of QQ-P-416, with a satin finish.

3.5 Identification marking. Each bookcase section, base section and top section shall be permanently and clearly marked on a visually accessible interior surface with an identification label as specified in 3.2.6.

3.6 Workmanship. A high degree of craftsmanship shall be exercised while performing the various operations of manufacture to eliminate the possibility of personal injury due to burrs and sharp edges; to assure that the occurrences of defects will not exceed the acceptable quality level specified herein; and to produce a finished commodity that is satisfactory in function, serviceability and appearance.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsibile for the performance of all inspection requirements as specified herein. Except as otherwise specified (see 6.2) the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certification for recovered material. A certificate shall be submitted certifying that the end item(s) supplied contain the percentage of recovered material specified in 3.2.

4.2 Component and material inspection. In accordance with 4.1, the supplier is responsible for insuring that components and materials are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified and in accordance with this specification.

4.3 End item inspection.

4.3.1 Visual examination. Examination of the units shall be in accordance with the classification of defects specified in Table I. The lot size shall be expressed in units of completed sections for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one Type I, Style A bookcase section, one Type I, Style B bookcase section, one Type II base and one Type III top. The inspection level and acceptable quality level (AQL) shall be as specified in 4.3.3.

(ONLY ONE OF DEFECTS IN BRACKETS SHALL BE SCORED FOR EACH UNIT OF PRODUCT EXAMINED)

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Enamel finish	Indication of rust under coating.	X	
	Poor adhesion, tacky, color separation, stains, runs or foreign matter in coating.		X
	Wrong color. Film thickness less than specified. Scratched or unpainted areas.	X	
	Abrasion or area of thin coating.		X
Chromium plating	Wrong type.		X
	Poor adhesion, i.e., blistered, peeling, flaky, stained or discolored.		X
Workmanship	Any part missing affecting serviceability.	X	
	Any part missing affecting appearance.		X
	Malformed, damaged, buckled, or warped parts affecting appearance.		X
	Sharp edge or projection that may cause injury.	X	
Door Knob	Not according to design specified. Not secured as specified.		X
	Rough or sharp edges.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

Examination of frames for defects in material.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Welds	Spot welds not spaced as specified.		X
	Burnt through, cracked, fractured or not fused.	X	
	Flash or splatter not removed. Depressed or protruding spot welds on exterior surface not filled, sanded or ground smooth.		X
	Brazing or fusion welding not ground smooth on exterior surfaces.		X
Bookcase section	Not size specified.	X	
	Out of square affecting serviceability.	X	
	Does not interlock or intermember.	X	
Door	Glass not as specified.	X	
	Glazing strip does not hold glass securely.	X	
	Knob in wrong location.		X
	Metal-to-metal contact during operation.	X	
Equalizer	Does not prevent door from binding.	X	
Base section	Tubular frame and legs not in alignment.		X
	Tubular components not accurately sized, squarely cut or properly deburred.		X
	Will not interlock or intermember with bookcase sections.	X	
	Legs not as specified.	X	
Top section	Not formed from one piece.		X
	Will not interlock or intermember with bookcase section.	X	

4.3.2 Dimensional examination. Inspection will be made of units for compliance with dimensions specified. Any dimension not within tolerance specified shall be classified as a defect.

4.3.3 Inspection levels and AL's. The acceptable quality levels (AQL's) expressed in percent defective and inspection levels shall be as follows:

	Inspection levels	AQL's
For examination in Table I Major	II	4.0
For examination in Table I Total	II	10.0
For examination in 4.3.2 (1 class)	II	4.0

4.4 Examination of preparation for delivery. An examination shall be made to determine compliance with the requirements of Section 5. The sample unit shall be one shipping container fully prepared for delivery. Sampling shall be in accordance with MIL-STD-105. The inspection level shall be S-3 with an AQL of 6.5 expressed in terms of percent defective.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

4.5 Performance tests.

4.5.1 Finishing and fabricating tests.

4.5.1.1 Bend test. A 20 gage steel sample panel, prepared in accordance with 3.4.1, shall be bent at room temperature around a 1/8 inch diameter rod to 180 degrees without cracking, flaking or loss of adhesion of the enamel.

4.5.1.2 Adhesion test. A 20 gage sample steel panel, prepared in accordance with 3.4.1, shall be scored with a razor blade through the film to the base metal in such a manner as to produce a grid of 1/8 inch squares. A one inch wide strip of pressure-sensitive transparent cellophane tape shall be applied firmly to the grid surface and then quickly pulled from the surface. The dried enamel film shall not be removed from the panel when the cellophane tape is removed.

4.5.1.3 Hardness test. A 20 gage steel sample panel shall be prepared in accordance with 3.4.1. The dried film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across the film surface without evidence of marring when viewed at an oblique angle in a strong light.

4.5.1.4 Chromium plating test. Test samples (leg or flat piece of equivalent size and material) shall be plated as specified in 3.4.2.1 and shall be tested for corrosion in accordance with the 5 percent neutral salt spray at 95 degrees F. in accordance with ASTM Test Method B-117. The test period shall be not less than 48 hours. After the specified exposure is completed, the specimen shall be visually examined to assure that the plating shows no evidence of peel, chip, uneven color, powder film, pits or stain. Widely scattered spots of corrosion are permitted, however, none of these spots of corrosion shall exceed 1/16 inch along the greatest dimension.

4.5.1.5 Spot weld test. A spot weld assembly of at least two parts of the end item section shall be produced under production or simulated production conditions. A chisel shall be driven between the welds or one part shall be bent back until failure occurs. Failure around the periphery of the weld(s) shall be considered compliance with specification requirements. Failure of the weld(s) shall be considered as failing to comply with specification requirements.

4.5.1.6 Label adhesive test. The identification label shall be affixed on a section as specified in 3.5 and shall be allowed to set for a minimum of 4 hours. If the label can be removed by hand without defacement it shall be considered as failing to comply with specification requirements.

4.5.1.7 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain over a radius not exceeding the thickness of the test sample without showing any crystallization, cracks or fractures on the outside of the bend. This test shall be applied to a representative sample of each gage of steel specified herein.

4.5.2 Component parts test.

4.5.2.1 Base frame and leg pull test for knock-down base. Force fit a base frame front member, side member and leg to a corner post. Do not apply the locking screws. Restrain the corner post from movement. Measure and record the joint position of the corner post to the leg tube. Apply a spring dynamometer or equally effective device to the leg and exert a 100 pound pull to the leg. Maintain the pull for 3 minutes. Any gap in excess of 1/32 inch (0.031) shall be cause for rejection. Repeat the tests in sequence to the front tube member and then to the side tube member. Repeat the same tests to another corner post, a rear tube member, an opposing side member and another leg. Any failure to any one of the six individual tests shall be cause for rejection.

4.5.3 End item tests.

4.5.3.1 Mechanical service and pull tests. Test the Type I, Style A bookcase section. The bookcase section shall be bolted or otherwise secured in its normal upright level position. The door under test shall be connected to a test machine. The test machine shall have a positive means, without springs, for adjusting its stroke so that the door will travel its full distance, from back stop to front stop, with not more than 1/4-inch clearance at the end of each stroke. The machine shall drive the door at a rate of 20 cycles per minute, plus or minus 2 cycles per minute. The point of connection on the door shall be not more than 4 inches from the left or right end of the door's leading edge. The machine shall operate the door for 10,000 cycles. One cycle shall be the travel of the door from the door's fully receded position, to extent of its horizontal travel outward and then back to the fully receded position. At the beginning of the test and at the 5,000 and 10,000 cycle points of the test, the door and door tracks shall be examined for damage or distortion. A pull test shall be conducted at these times. The cabinet shall have failed the test if the door, door tracks or equalizer mechanism is permanently distorted or otherwise damaged or if the pull force to operate the door exceeds 3 pounds (the area of the attachment of the pull gage shall be the same as the area of attachment of the test machine) or the door develops metal-to-metal contact.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

4.5.3.2 Manual service and pull test. Test the Type I, Style A bookcase section. The bookcase section shall be placed in a level position. The door shall be opened and receded into the case. The door shall be hand-gripped at the leading edge of the door not more than four inches from either end of the door. The door shall be pulled forward and receded back into the case (within one inch of full travel) at least 10 times. During this hand operation of the door, it shall travel smoothly and shall not bind. Also, during this test, at no point of receding the door into the case and withdrawing it from the case shall either side of the leading edge of the door be more than 1/8 inch out of parallel with the face of the case. If the door passes this test, it shall then be hand gripped within four inches of the opposite end of the door and the test repeated.

4.5.3.3 Intermembering test. Units to be tested shall be sample units as defined in 4.3.1. Each of the bookcase sections, the base and the top shall be attached to each other and to bookcase sections, base and top previously established by the Federal Supply Service as standard Government bookcase sections, base and top. In both of the attaching arrangements defined above all units shall fit together in proper alignment when assembled and shall not inset or protrude beyond other sections more than 1/16 inch on sides, front or back.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be Level A, B or Commercial as specified (see 6.2). Each bookcase section, base section and top section shall be wiped clean just prior to packaging. A cleaning agent that will not harm the finish may be used as required.

5.1.1 Level A and B.

5.1.1.1 Type I bookcase sections. Bookcase sections with glass doors shall have the bottom of the door protected with a strip of non-marring cellulose cushioning material, not less than .125 inches thick or with 2x2x1/8-inch thick non-abrasive pads of fiber felt or polyurethane foam placed under the two bottom corners. The glass door, in the closed position, shall be secured in place with two strips of re-inforced pressure sensitive tape, applied to the door front and sides of the bookcase. In addition, the glass surface shall be covered with a sheet of single wall corrugated fiberboard, minimum Grade 200, conforming to PPP-F-320 and secured to the bookcase front with tape. All bookcase sections, shall be covered with a bag, made of polyethylene film not less 1.5 mil thick, or a bag, made of non-abrasive, oil or wax impregnated kraft paper - minimum 40 pound basis weight (24"x36"-500). Alternatively, the bag cover may be omitted when the fiberboard corner posts are coated or covered with a non-abrasion or cushioning material designed to protect finished surfaces from abrasion.

5.1.1.2 Type II base section. Each set-up base section shall be covered with a bag, or alternative option, as specified in 5.1.1.1. Base sections supplied knocked-down, shall have the parts, excluding the assembly hardware, individually wrapped with cushioning or non-abrasive material to prevent metal to metal and metal to fiberboard contact when packed. The assembly hardware and instruction sheet shall be packed in a kraft or polyethylene bag or envelope and sealed.

5.1.1.3 Type III top section. Each top section shall be over wrapped with a sheet of non-marring cellulose cushioning material (minimum .075 inches thick), polyethylene film (not less than 1.5 mil thick) or an oil or wax impregnated kraft paper - minimum 40 pound basis weight (24" x 36"-500). The sheet shall be large enough to extend down over the sides and shall be taped to the under side of the top.

5.1.2 Commercial. Each Type I bookcase section, Type II base section and Type III top section shall be prepared for packing to insure adequate protection against abrasion and damage during shipment, handling and storage.

5.2 Packing. Packing shall be Level A, B or Commercial as specified (see 6.2). Fiberboard used for interior packing shall conform to PPP-F-320, Type CF, Class domestic, Variety DW, minimum Grade 200, unless otherwise specified.

5.2.1 Level A.

5.2.1.1 Type I bookcase sections and Type II base section. Each bookcase section and set-up base section packaged as specified in 5.1.1.1 and 5.1.1.2 respectively, shall be packed in a close fitting box conforming to PPP-B-636, Style optional, minimum Grade W5c. The interior packing shall conform to 5.2.2.1. The boxes shall be closed, waterproof sealed and reinforced in accordance with the appendix to PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the currentversion before use.

5.2.1.2 Type III top section. Each top section packaged as specified in 5.1.1.3 shall be packed in a close fitting box conforming to PPP-B-636, Style optional, minimum Grade W5c. The interior packing shall conform to 5.2.2.2. The boxes shall be closed, waterproof sealed and reinforced in accordance with the appendix to PPP-B-636. Tape used shall be a minimum of 3 inches wide.

5.2.2 Level B. Each of the following type units shall be packed in a close fitting box confroming to PPP-B-636, Type CF, Class domestic, Variety SW, minimum Grade 200 unless otherwise specified.

5.2.2.1 Type I bookcase sections and Type II base section. Each bookcase section and set-up base section shall be packed in a Style RSC box. A fiberboard spring pad (Fig. B) extending the full inside length and width dimensions of the box (+0,-1/8") shall be positioned on the top and bottom of each unit (Fig. A.). The fiberboard pad shall be slit-scored and folded to provide a minimum clearance of 3/4 inches between the unit top and bottom and the respective box flaps. The slit-scored folds shall be 3 ± 1/4 inches wide and parallel the length of the box.

Fiberboard "L" shaped corner posts (Figures C and D) extending the full height of the packed unit (+0, -1/8"), shall be used in all four corners of the pack. The corner posts shall be slit-scored and folded to provide a minimum inside face width of 2-1/2 inches and at least 3/4 inches of clearance between the item and inside walls of the container. Bookcase sections with glass doors shall require a 1½ inch clearance between the face of the glass and the inside wall of the container (see Fig. C).

Alternatively, each above unit shall be packed in a Style FOL box. Non-abrasive interior forms shall be used to maintain the clearances specified above. Additional interior forms of not less than 5 inches in length shall be used along edges exceeding 12 inches between forms.

When the base section is supplied knocked-down, the parts packaged as specified in 5.1.1.2 shall be packed in a box, Style optional, DW variety, minimum Grade 275.

5.2.2.2 Type III top section. Each top section packaged as specified in 5.1.1.3 shall be packed in any style box. Interior forms as specified in 5.2.2.1 shall be used to maintain a minimum clearance of 3/4 inches between the item and the container.

5.2.3 Commercial. Each bookcase, base and top section packaged as specified in 5.1.3, shall be packed in a fiberboard box to insure delivery at destination, to provide for redistribution by the initial receiving activity, and shall be acceptable by common carrier under National Motor Freight Classification and Uniform Freight Classification.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.2).

5.3.1 Civil agencies. Each shipping container shall be marked in accordance with FED-STD-123.

5.3.2 Military activities. Each shipping container shall be marked in accordance with MIL-STD-129.

5.3.3 Special marking. In addition to the markings required by 5.3.1 or 5.3.2, each shipping container shall be marked as follows (ref. Fig. E).

a) on a side panel

(items with glass)

UP
FURNITURE - CLASS
FRAGILE, HANDLE WITH CARE

(items without glass)

UP
FURNITURE
FRAGILE, HANDLE WITH CARE

b) on a top panel

TOP
THIS SIDE UP

c) On any other panel the appropriate package certificate "J-F" with the fiberboard test.

d) To facilitate color identification the front and one end panel of each shipping container shall have a area approximately 3x6 inches painted to match the color of the section packed. Alternatively, adhesive backed color panels of the sized specified above shall be applied to the container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The bookcase sections, bases and tops are designed to be stacked. The bookcase sections are provided with or without glass receding doors in three heights. The items covered herein can be interlocked with standard bookcase sections, bases and tops now in use in Federal agencies. Sections without doors are intended for use in normal office environment. Sections with doors are intended for use where environmental conditions or value of items stored justify the increased cost.

6.2 Ordering data. Purchasers should select the preferred options offered herein and include the following data in procurement documents:

(a) Title, number and date of this specification.
(b) Selection of type, style and size required (see 1.2.1).
(c) Whether preproduction sample is required (see 3.1).
(d) Color requirements (see 3.2.3.2.1).
(e) When specific test facilities and services are required (see 4.1).
(f) Level of packaging and packing required (see 5.1 and 5.2).
(g) Marking requirements (see 5.3).

6.3 Definition of terms used herein.

6.3.1 Welding terms. All spot welding and electrical resistance welding shall be as defined herein.

Resistance welding: A group of welding processes wherein coalescence is produced by the heat obtained from resistance of the work to the flow of electric current in a circuit of which the work is a part, and by the application of pressure.

Spot welding: A resistance welding process wherein colescenece is produced by the heat obtained from resistance to the flow of electric current through the work parts held together under pressure by electrodes. The size and shape of the individually formed welds are limited primarily by the size and contour of the electrodes.

Fusion welding and brazing shall be defined as follows:

Fusion welding: Fusion welding consists of any welding process in which the weld is carried out by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from an external source.


Brazing: Brazing is a process wherein coalescence is produced by heating to suitable temperatures above 800 degrees F. and by using a filler metal having a metling point below that of the base metals. The filler metal is distributed between the surfaces of the joint by capillary attraction.

6.4 GSA standard samples.


6.4.1 Enamel. A sample panel of the specified enamel finish can be obtained from the Business Service Center, Federal Supply Service, General Services Administration, Washington DC 20407, or from the Business Services Center in the nearest GSA Regional Office.

6.4.2 Sample panels, chrome finish. Sample panels of the satin chromium finish are obtainable from the Technical Support Branch, National Furniture Center, Federal Supply Service, General Services Administration, Washington DC 20406.


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:40Z
Check the source to verify that this is the current version before use.

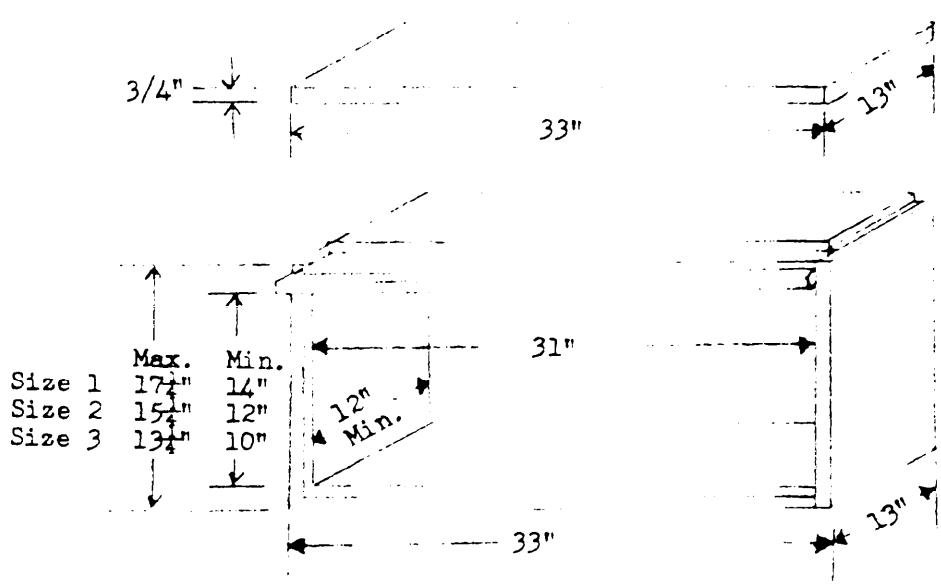

Type I, Style A - With glass receding door

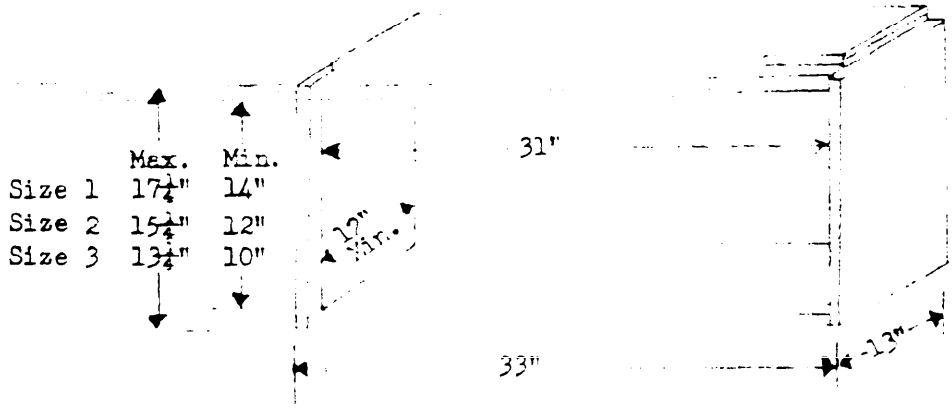


Type I, Style B - Without door

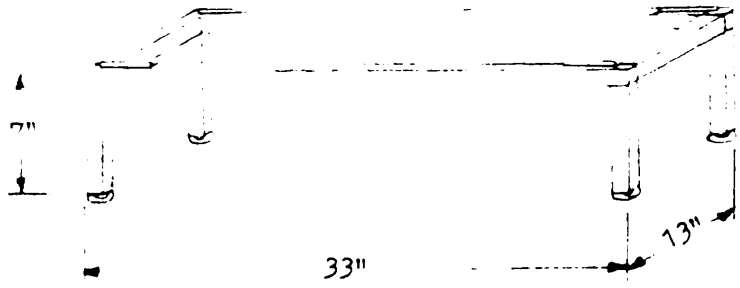


Type II Base section

Figure 1 - Overall Dimensions

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

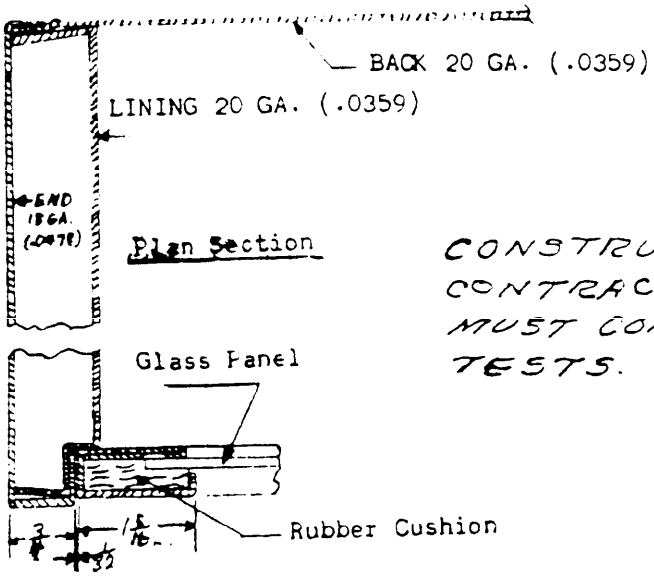

CONSTRUCTION OF EQUALIZER IS CONTRACTOR OPTION EXCEPT IT MUST COMPLY WITH APPLICABLE TESTS.

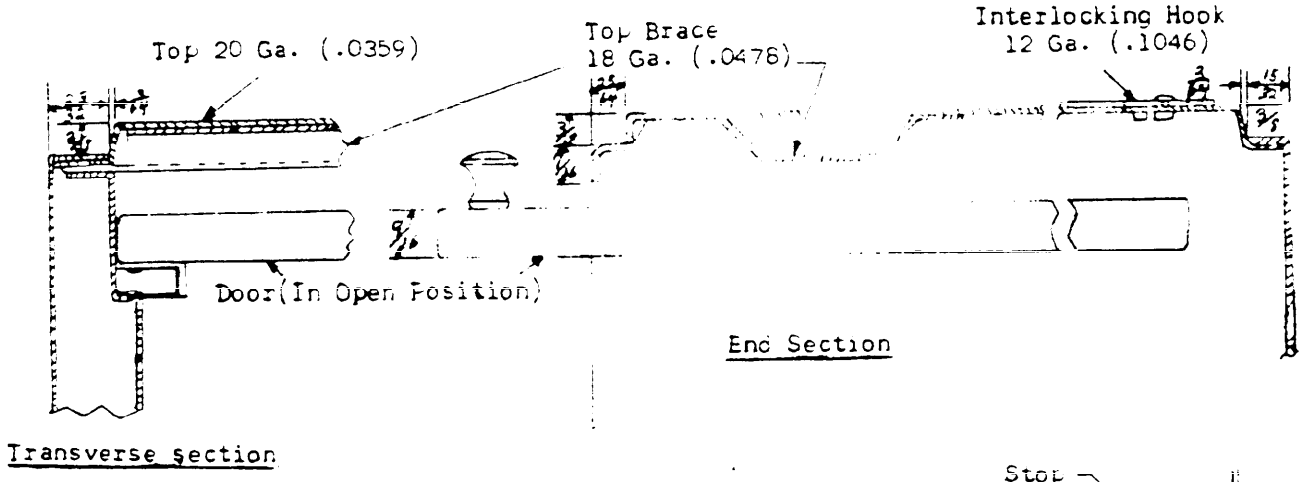

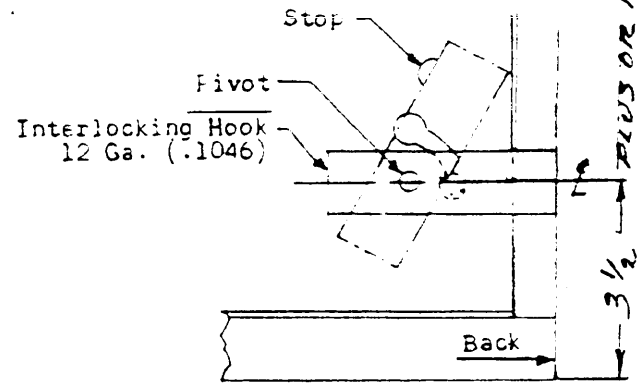


Figure 2
Method "A" construction

Type I Style A
Bookcase Section

Details of Interlocking Hook

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.


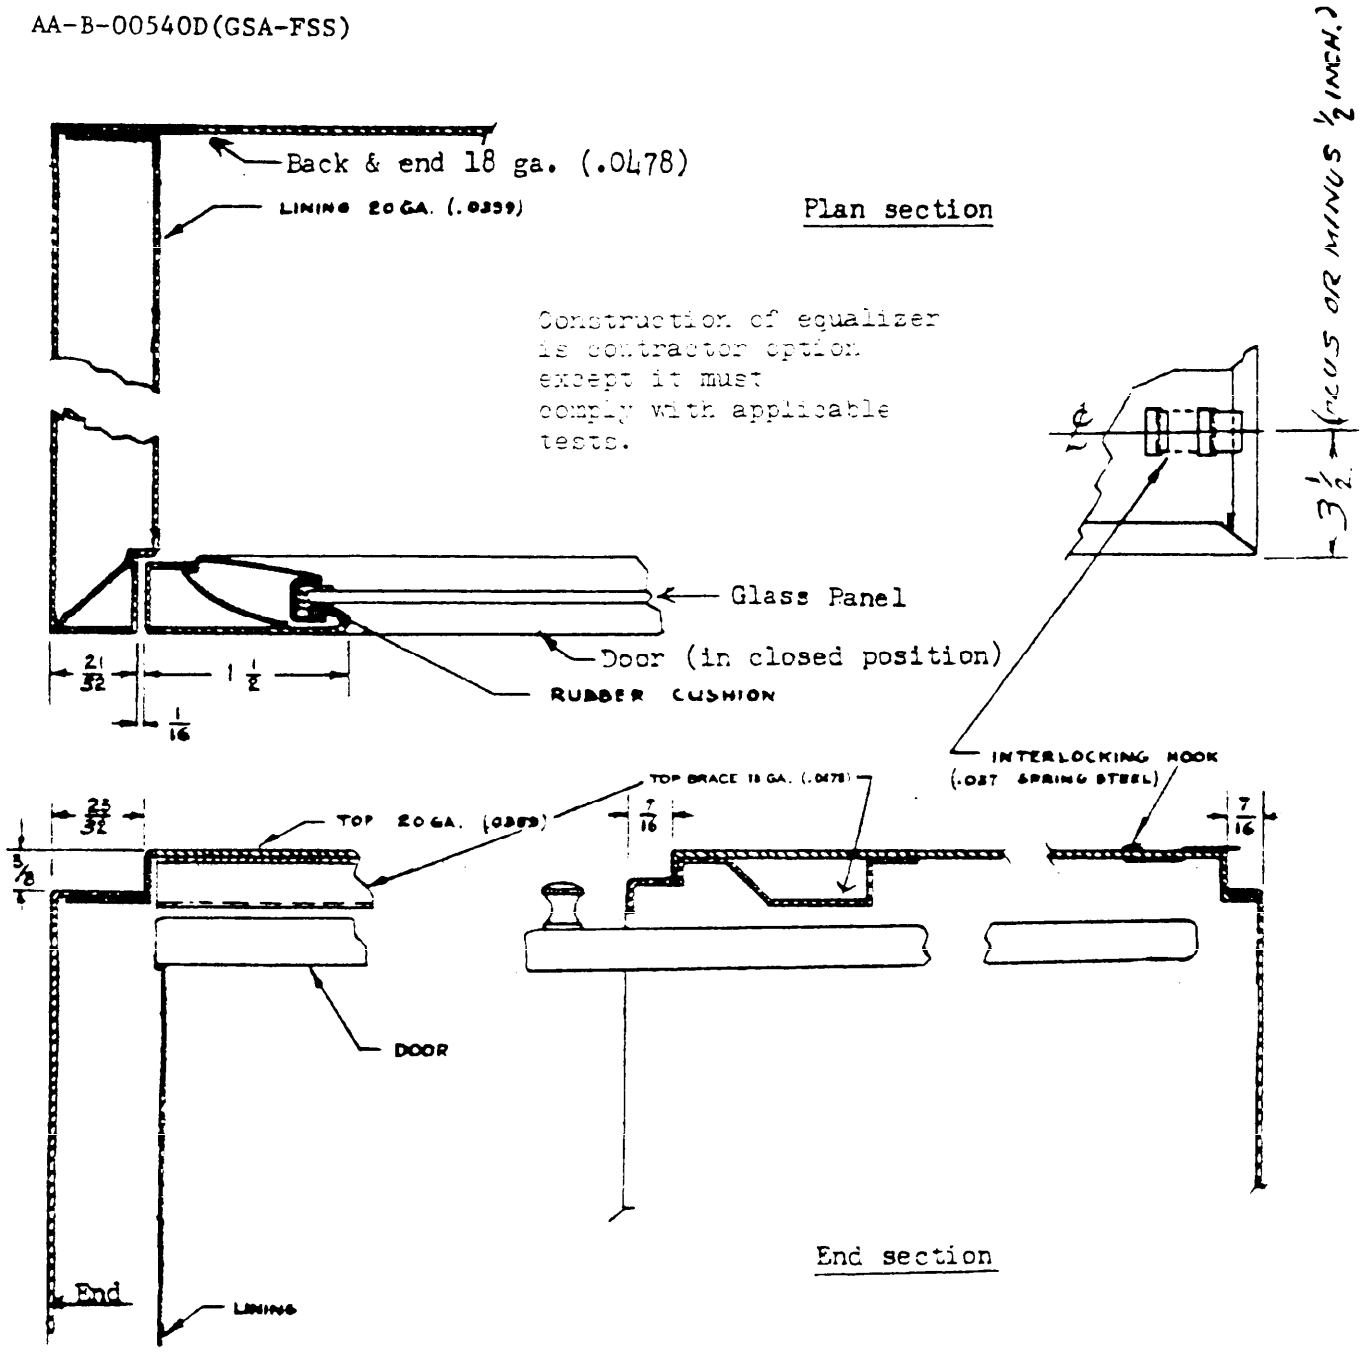



Figure 3 - Method "B" construction

Type I, Style A
Bookcase section


Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

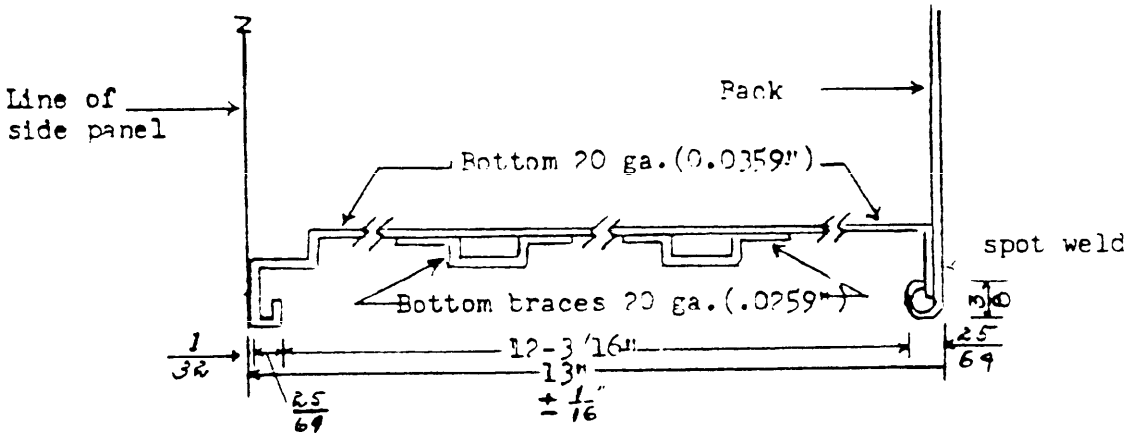


End section

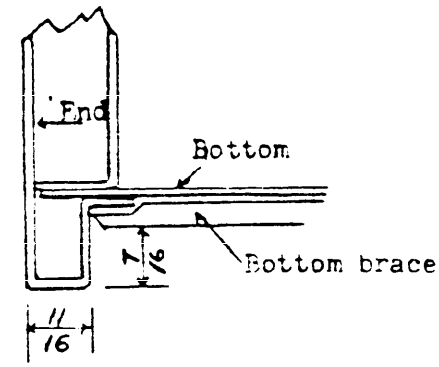

Transverse section

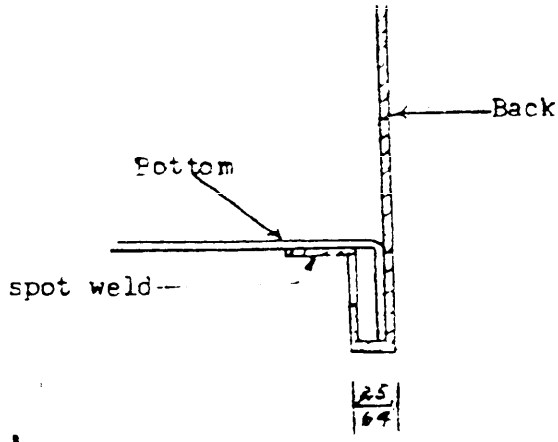

Alternate construction back and bottom flanges

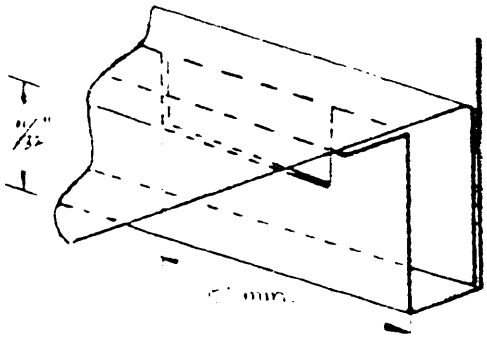


Cutout for interlock


Figure 4 - Bottom construction

Type I, Styles A and B
Bookcase sections


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:40Z
Check the source to verify that this is the current version before use.

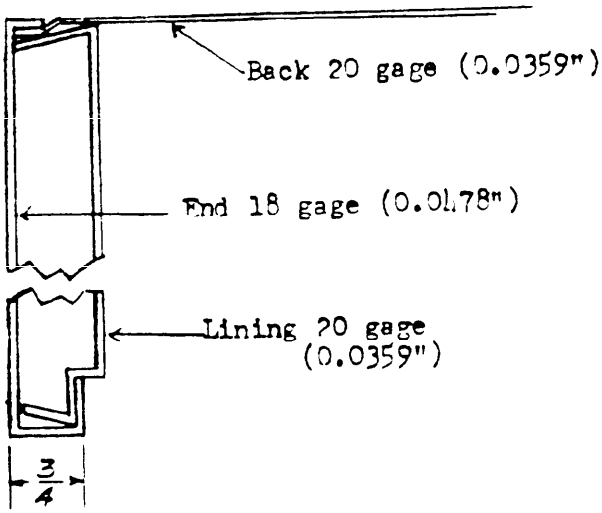


Plan section

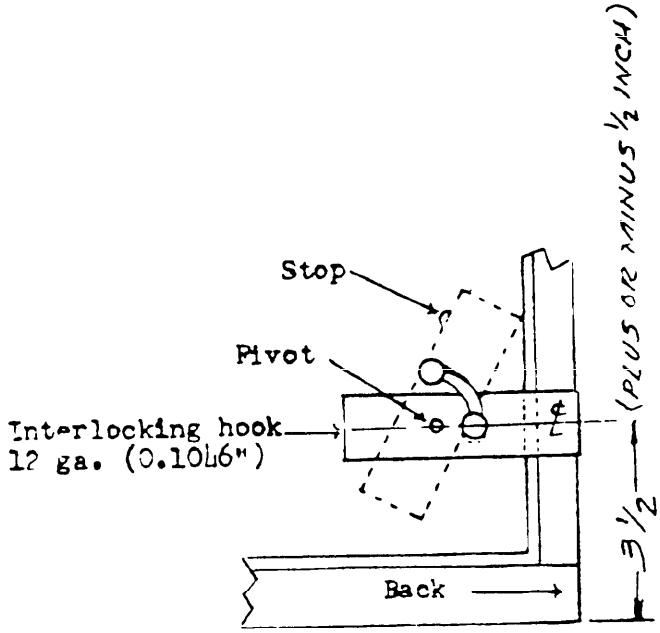

Details of interlocking hook

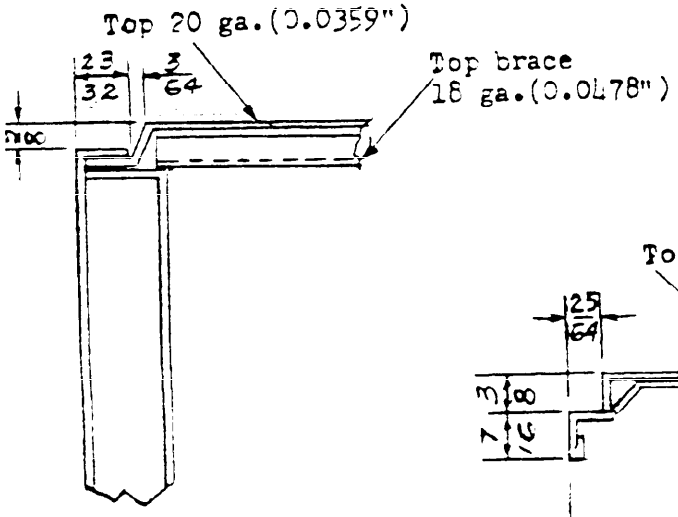

Transverse section

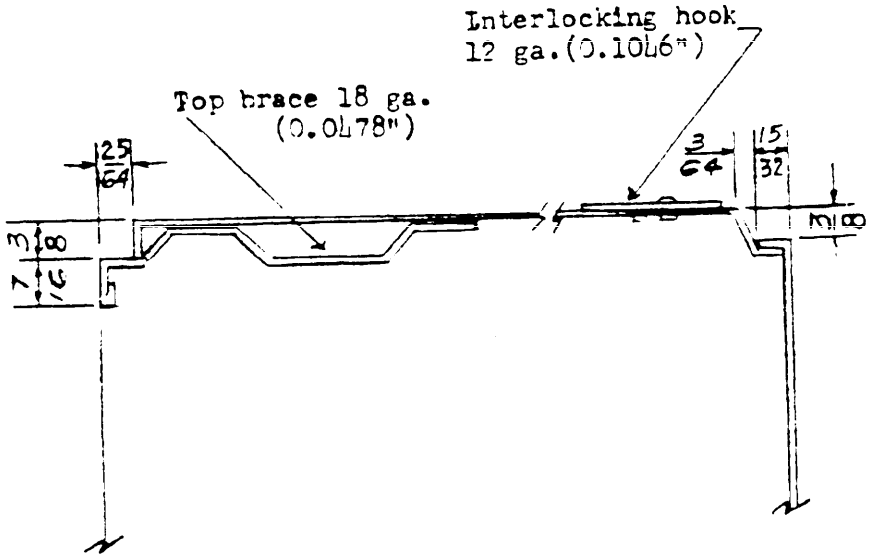

End section

Figure 5 - Method "A" Construction
Type I, Style B
Bookcase section

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the currentversion before use.

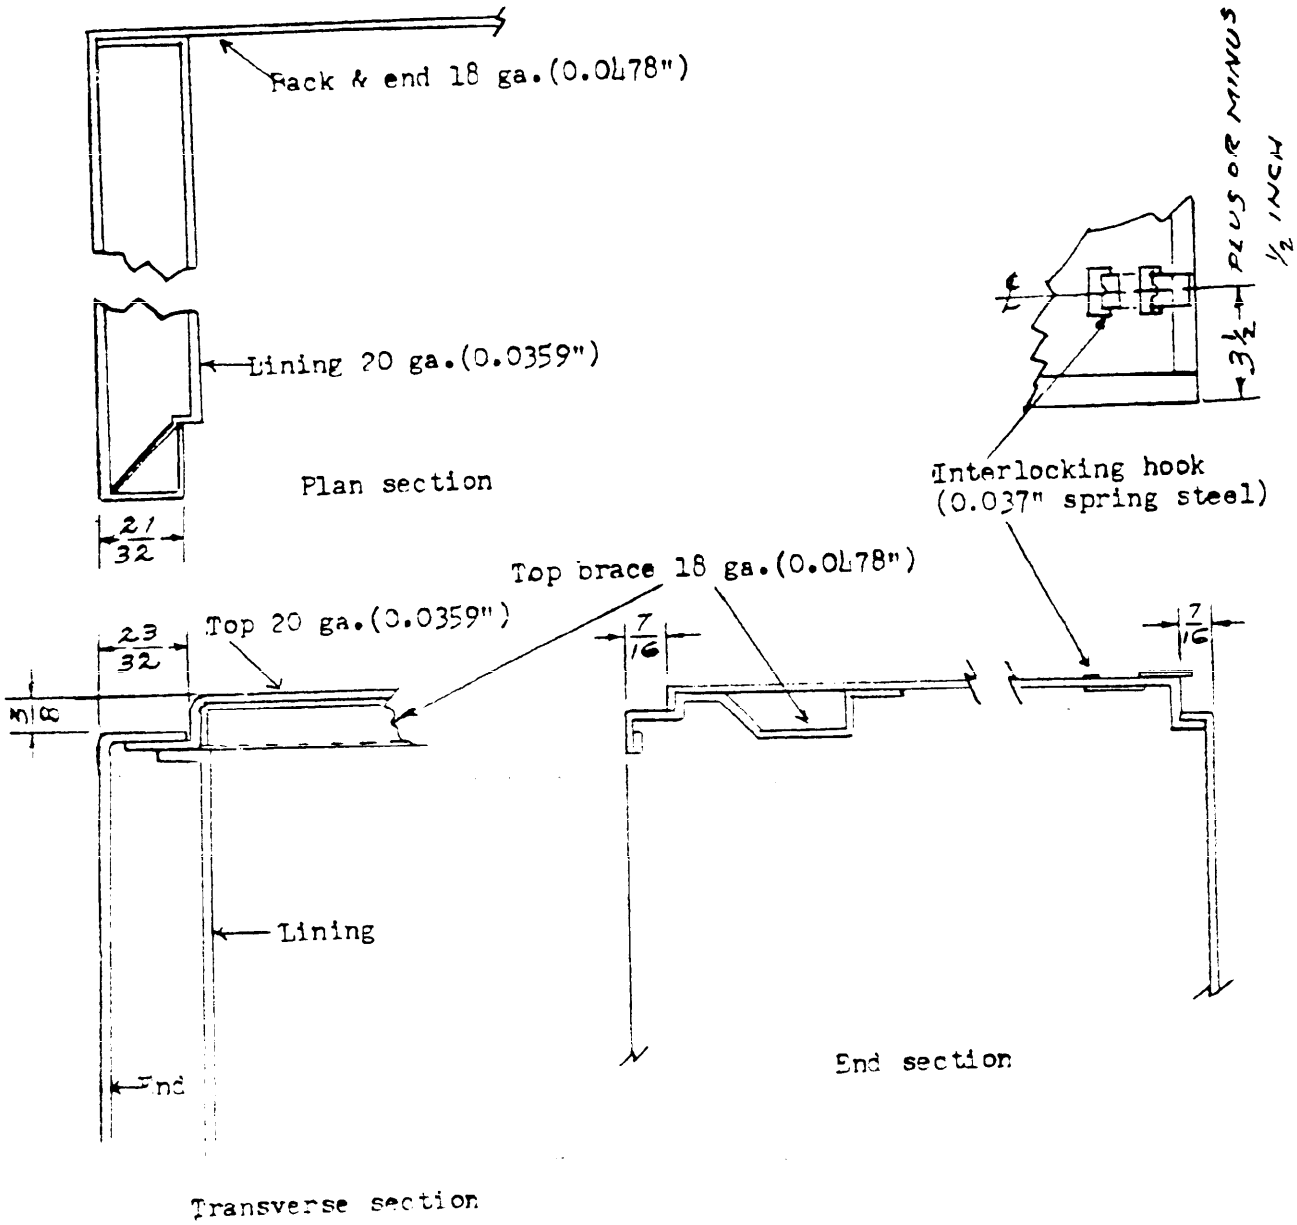


Figure 6 - Method "B" Construction
Type I, Style B
Bookcase Section

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the currentversion before use.



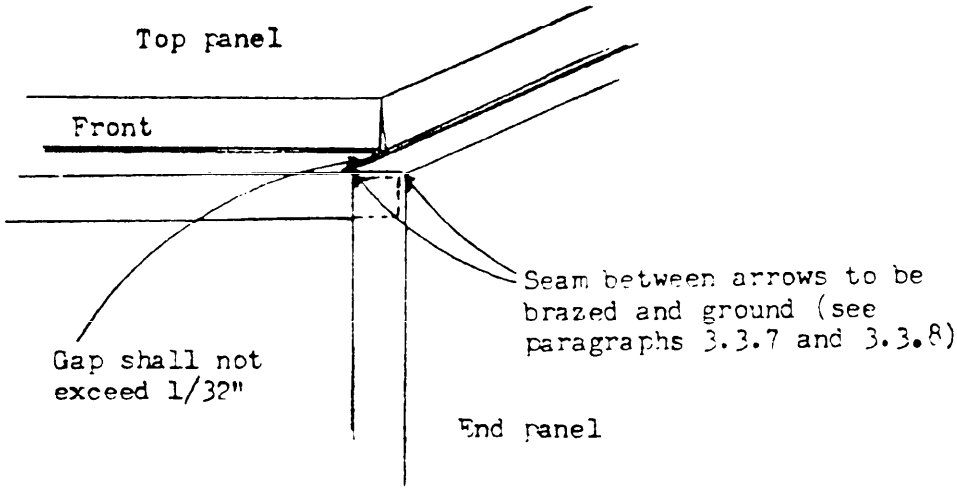


Figure 7 - Areas of brazing of front corner section of bookcase section

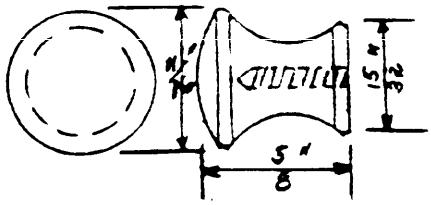

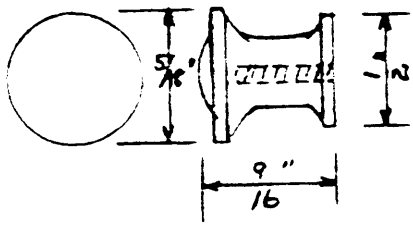

Note - Subject to manufacturing tolerances

Figure 8 - Door knob

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

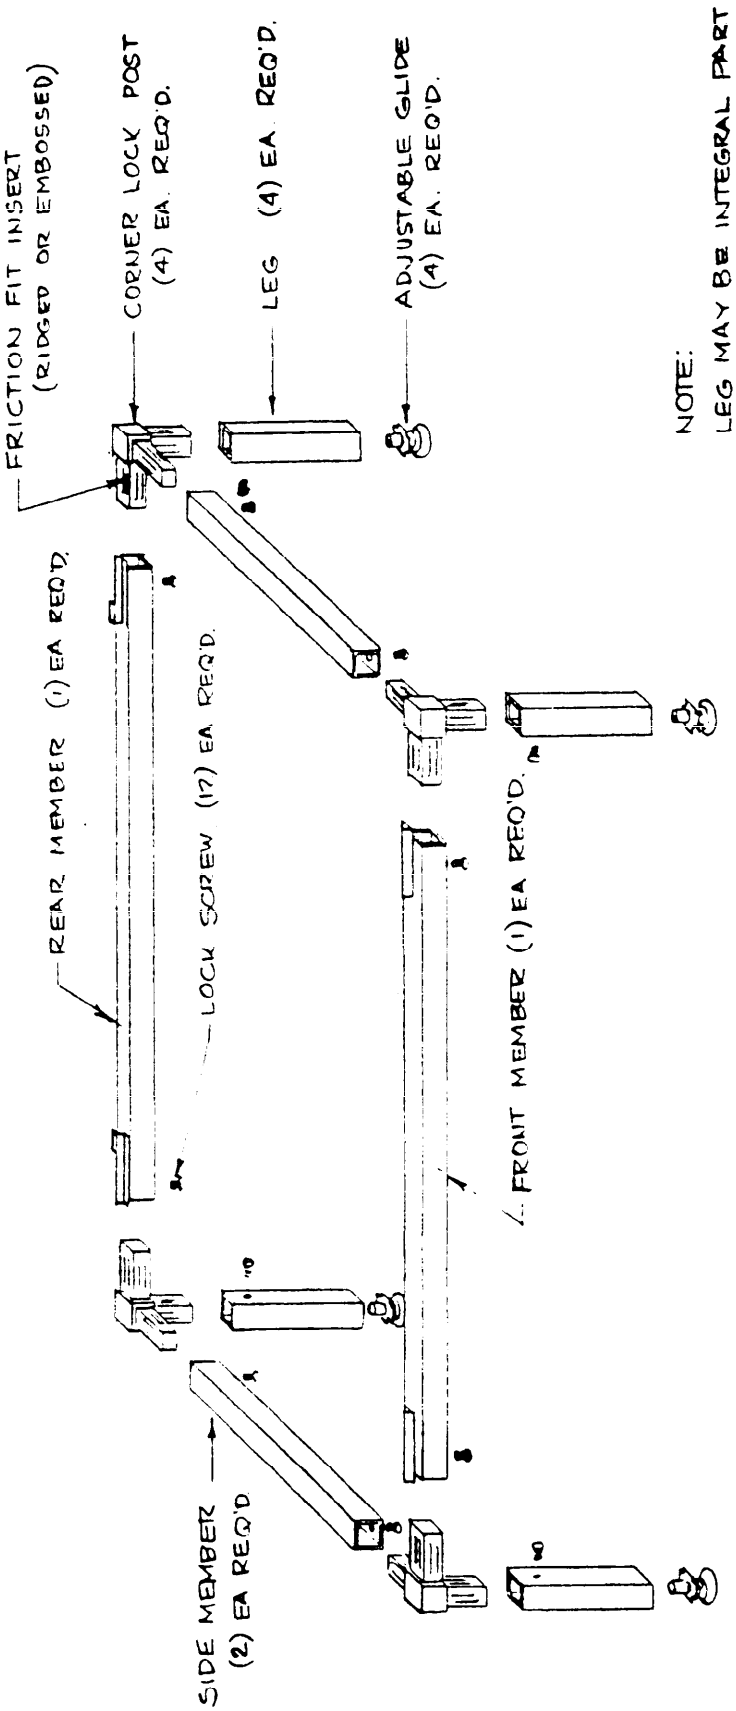


FIGURE 9

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the currentversion before use.

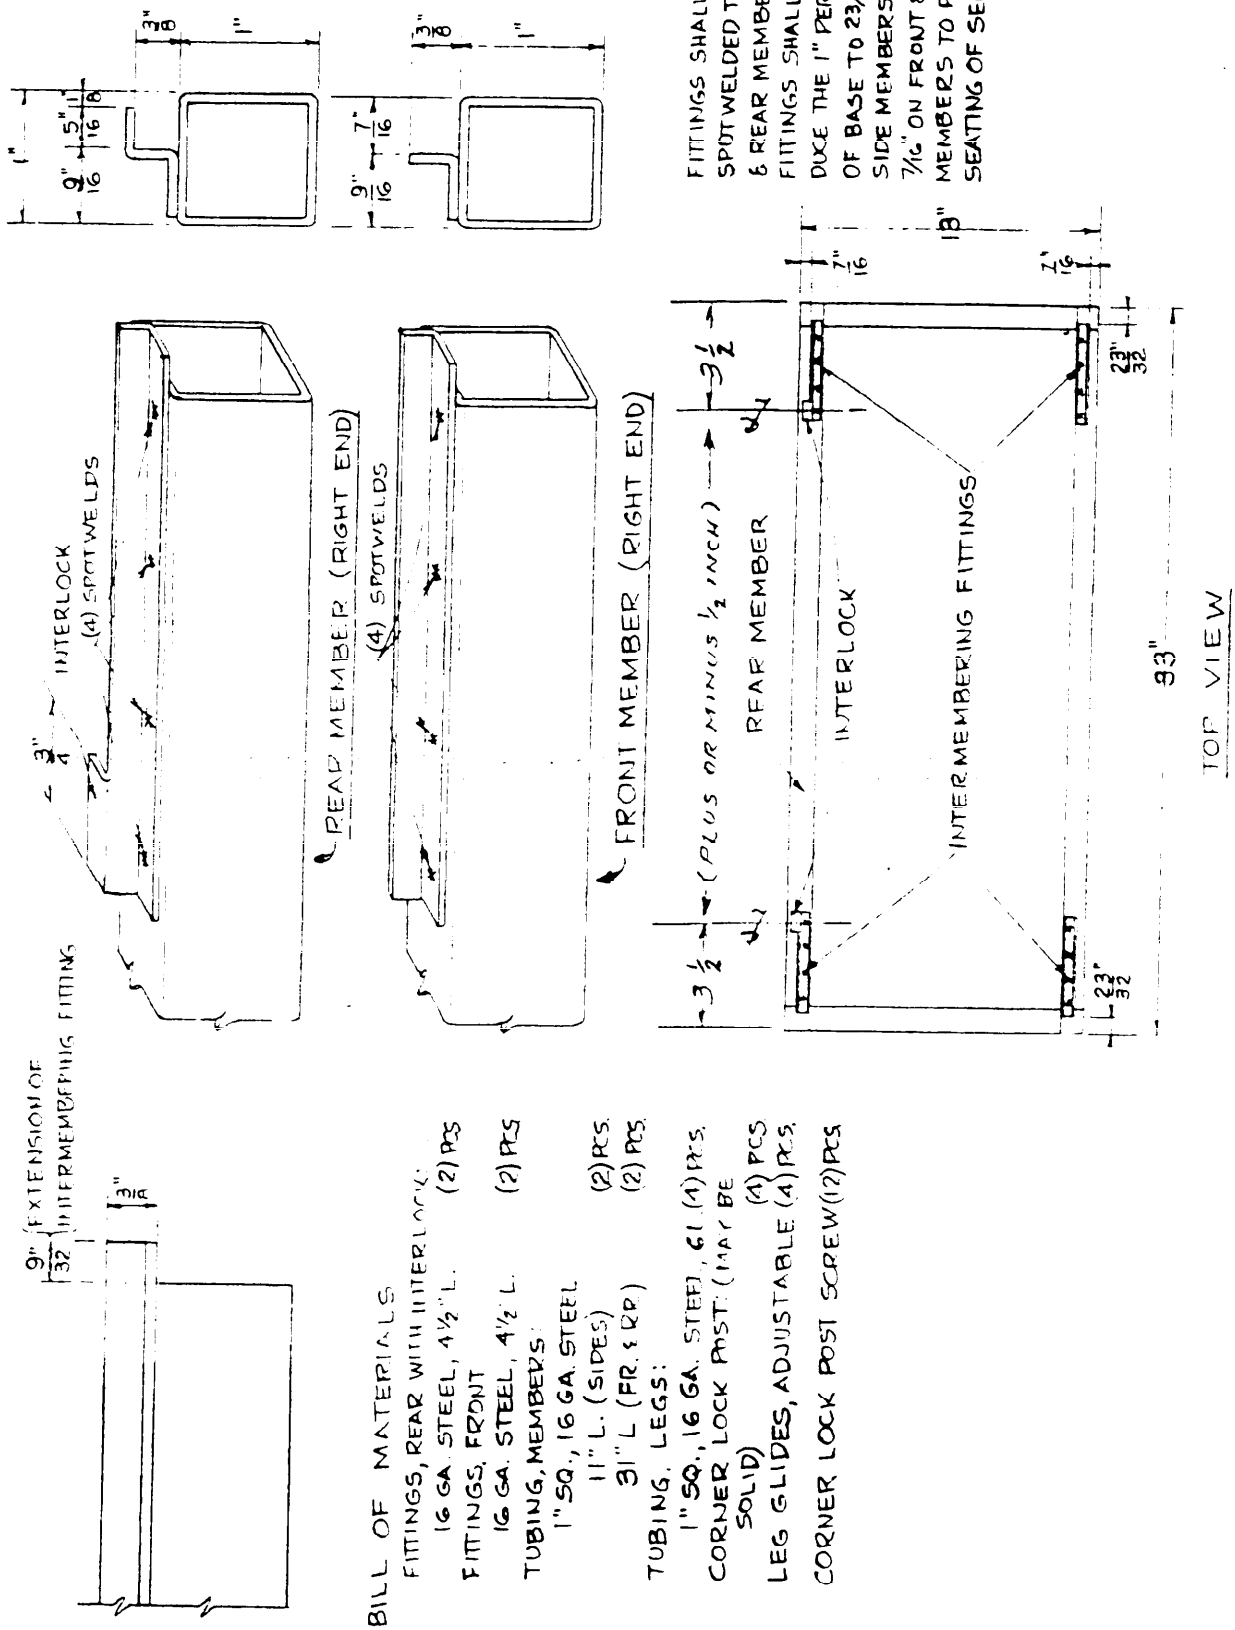


FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.

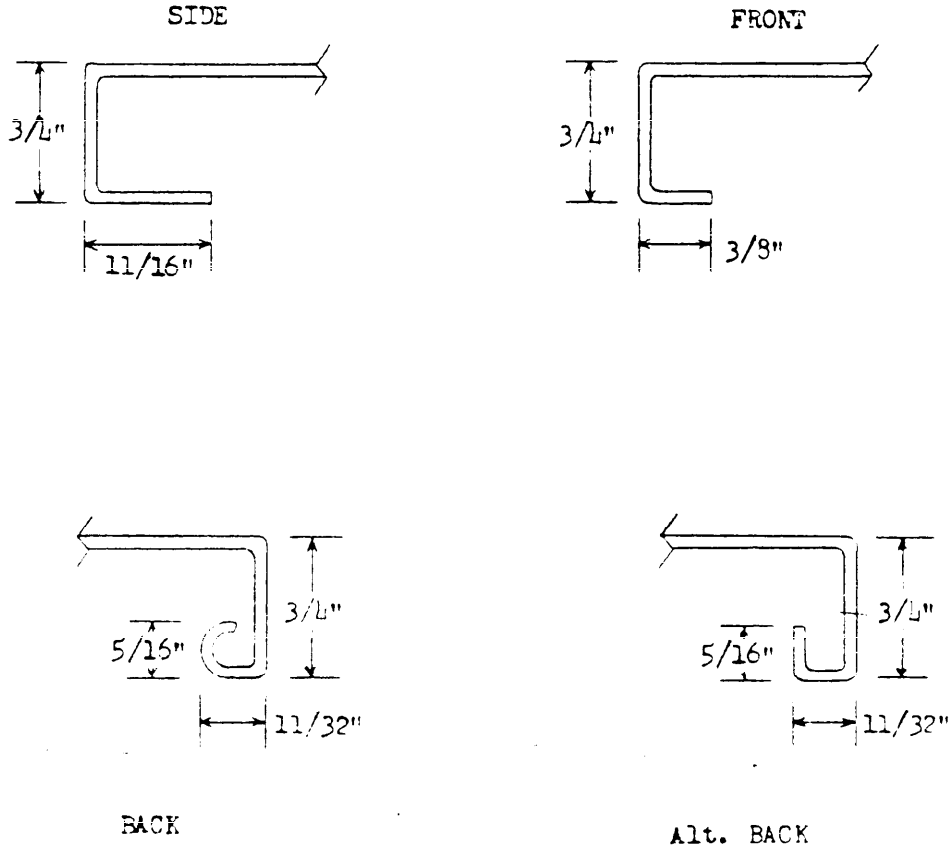


Figure 11
Type III , Top Section

GSA DC 78-6804

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:40Z
Check the source to verify that this is the current version before use.