INTERIM FEDERAL SPECIFICATION

DESKS, FLAT TOP, STEEL, OFFICE, 30 INCHES DEEP

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Standardization Division, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. The flat top desks covered by this specification are designed to provide full desk facilities while conserving floor space. A secretarial desk consists of one Type I (Class 1 or Class 2) desk plus a type II Typewriter platform.

1.2 Classification.

1.2.1 Types and classes. The desks and accessories shall be of the following types and classes:

Type I. Clerical desks
Class 1. Double pedestal, 60 inches wide by 30 inches deep by 29 inches high.
Class 2. Single right pedestal, 45-1/2 inches wide by 30 inches deep by 29 inches high.

Type II. Typewriter platform
Typewriter bed - 17 inches wide, (across face of pedestal), by 20 inches long, overall height of platform - 25-3/4 inches.

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extend specified herein.

Federal Specifications:

L-P-508 - Plastic sheet, laminated, decorative, and nondecorative
QQ-C-320 - Chromium plating (electrodeposited)
QQ-N-290 - Nickel plating (electrodeposited)
QQ-P-416 - Plating, cadmium (electrodeposited)
QQ-R-571 - Rods, welding, copper and nickel alloys
QQ-Z-325 - Zinc coating, electrodeposited, requirement for
TT-C-490 - Cleaning method and pretreatment of ferrous surfaces for organic coatings.
MMM-A-260 - Adhesive, water-resistant (for sealing waterproofed paper).
PPP-B-601 - Boxes, wood, cleated plywood
PPP-B-621 - Boxes, wood, nailed and lock-corner
PPP-B-636 - Box, Fiberboard
PPP-B-1055 - Barrier material, waterproofed, flexible
PPP-T-45 - Tape, gummed, paper, reinforced and plain, for sealing and securing

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civilian Use)
Fed. Std. No. 595 - Colors.
Fed. Std. No. 187 - Identification of Pressed Bends, Forms, Seams and Joints (Sheet Metal).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards ant at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.)

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-W-12332 (MR) Welding, Resistant, Spot and Projection for Fabricating Assemblies of Low-Carbon Steel.

Military Standards:

MIL-STD-20 - Welding Terms and Definitions.
MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other Publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Steel Products Manual, Carbon Steel Sheets.

(Application for copies may be addressed to the American Iron and Steel Institute, 150 East Forty-Second Street, New York, New York 10017).

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. The steel sheets used for all exposed parts and tops shall be of commercial quality cold rolled steel with a stretcher level standard of flatness as defined in the Steel Producers Manual. Other sheets may be cold rolled oiled, hot rolled pickled and oiled, or hot rolled anealed and shall stand the bend test specified in 4.6.5. The steel shall be smooth, free from rust, scale, pits, scratches, laps and buckles affecting strength or appearance. The gage numbers specified are the Manufacturers' Standard gages for steel sheets and coils. The decimal equivalents shown for the steel thicknesses are subject to the standard tolerances or ordering limits and the gages specified herein are the minimum allowed unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.2 Plastic Laminate Sheet. The plastic laminate sheet shall conform to the requirements of Federal Specification L-P-508, Style D, Type I, Grade H P, Class 1. The plastic laminate sheet shall be 0.062 inches thick with a plus or minus tolerance of 0.005 inches. The plastic color, (white), and finish shall match the standard plastic adopted by the Federal Supply Service, General Services Administration. Samples of the standard plastic are obtainable from the Business Service Center, Federal Supply Service, General Services Administration, Washington, D. C. 20407, or from the Business Service Center of the nearest GSA Regional Office.

3.2.3 Hardware

3.2.3.1 Face Hardware. The face hardware shall be satin finished anodized aluminum, type 430 corrosion resistant steel, or satin finished chromium on steel or on die-cast, brass or bronze. The exposed surfaces of drawer pulls, sliding shelf pulls, utility drawer pulls, and top binding strip shall match each other within the limits of the base metal and protective plating used. The exposed surfaces of all face hardware shall be free of sharp edges, burrs, pits, nicks, and scratches.

3.2.3.2 Screws, bolts, nuts and washers. All screws, nuts, bolts, and washers shall be zinc or cadmium plated. The quality of this plating shall be as commercially produced by the manufacturers of these items.

3.2.3.3 Drawer pulls. The contractor may use the same drawer pulls, sliding shelf pulls and utility drawer pulls he uses on desks he produces for the commercial market provided they conform to the following requirements:

a. They shall be of material specified in 3.2.3.1.
b. All edges on pulls shall have not less than 0.010 inch radius.
c. All corners shall be slightly rounded.
d. Inside grip area in storage and file drawer pulls shall be not less than 3 inches.
e. Wall thickness around attaching hole shall be not less than 0.078 inches at any point around the perimeter of the hole.

Contractors whose commercially used pulls do not conform to the above requirements and contractors who do not produce desks commercially shall provide pulls of the configuration shown in figure 2. These pulls shall also conform to above requirements. Stamped pulls and pulls of the configuration specified in AA-D-00191 are not permitted.

3.2.3.4 Binding strip. The binding strip shall be as specified in 3.2.3.1. The exposed section shall be rounded to conform to the general design of the top. The insetting web of the binding strip shall be curved, flanged, embossed, or serrated to grip the edge molding and top plate when in place.

3.2.3.5 Adjustable glides (Desk). The adjustable glides, when used, shall be constructed of not less than 18 gage (0.0478 inch) steel. The base of the glide shall be not less than 1-1/2 inch in diameter, shall be fully closed, and shall be free of roughness and sharp edges. The glides shall have a threaded stem not less than 3/8 inch in diameter (diameter subject to screw thread tolerance). The entire glide shall be made corrosion resistant by zinc or cadmium plating in accordance with 3.2.4.3 and 3.2.4.4.

3.2.3.6 Adjustable Glides (type Platform). These adjustable glides shall have a base diameter of not less than one inch nor more than 1-3/8 inches. They shall have a threaded stem not less than 1/4 inch diameter and not less than 1-1/2 inches long. The glides shall be cadmium plated in accordance with 3.2.3.5.

3.2.4 Finishing materials.

3.2.4.1 Primer. The primer, when used, shall be compatible with the finishing enamel.

3.2.4.2 Enamel. The enamel shall be of the baking type in accordance with the manufacturer's commercial product. The color shall be as specified in 3.2.4.2.1, except for the bottom of the top plate, which may be a commercial shade of gray.

3.2.4.2.1 Color of finish. Unless otherwise specified (see 6.2), the color of the finish shall be gray, Color No. 26134 of Federal Standard No. 595. Sample panels of the standard color are obtainable form the Business Service Center, Federal Supply Service, General Services Administration, Washington, D. C. 20407, or from the Business Service Center of the nearest GSA Regional Office.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.4.3 Zinc Coating. Zinc coating shall be in accordance with Type I, Class 2 of Specification QQ-Z-325 unless otherwise specified.

3.2.4.4 Cadmium plating. Cadmium plating shall be in accordance with Class 1, Type I of Specification QQ-P-416 unless otherwise specified.

3.2.4.5 Chromium plating. Chromium plating shall be in accordance with Specification QQ-C-320, Class 1, Decorative plating, Type II, satin, over a steel base metal in accordance with Specification QQ-N-290, Class 1, decorative plating, Type IV(QS) unless otherwise specified.

3.3 Design. The general exterior appearance of the items covered by this specification shall be as shown in figures 1 and 2. Basic design requirements are as follows:

a. All Type I, Class 1 desks shall have a utility drawer in the left hand pedestal and a sliding shelf in the right hand pedestal. Sliding shelf and utility drawer shall be interchangeable.

b. All Type I, Class 2 desks shall have a utility drawer in the pedestal.

c. All Type I desks shall be without locks.

d. Any single storage drawer shall be interchangeable with any other storage drawer in any given desk without the use of special tools.

e. Any two adjoining storage drawers shall be interchangeable with one file drawer in any given desk without the use of special tools.

f. All Type I desks shall have recessed back panels.

Other design features shall be as specified herein.

3.4 Construction

3.4.1 Spot Welding. Spot welds shall not be closer to the edge of either adjoining member than 1/2 the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeez time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.6.4. All depressions, pits or raises on exposed surfaces due to welding shall be filled and sanded, or ground smooth. When spotwelding components together, the end welds in any given series of welds shall be not more than 1/2 inch from the end of the flange or piece being welded, unless obstructions interfere, or unless otherwise specified herein.

3.4.2 Definition of terms used herein.

3.4.2.1 Welding terms. All spot welding and electrical resistance welding shall be as defined in Military Standard MIL-STD-20. Definitions of these terms in MIL-STD-20 are as follows:

Resistance welding: A group of welding processes wherein coalescene is produced by the heat obtained from resistance to the flow of electric current through the work parts held together under pressure by electrodes. The size and shape of the individually formed welds are limited primarily by the size and contour of the electrodes.

Fusion welding and brazing shall be defined as follows:

Fusion welding: Fusion welding consists of any welding process in which the weld is carried out solely by the melting of the metals to be joined, without any mechanical pressure. The joining is usually accomplished through the fusion of metal deposits from an external source.

Brazing: Brazing is the joining of metals with the aid of a filler metal of a different composition having a melting point above 800 degrees Farenheit. Brazing method shall be gasflux, conforming to Type I, Class RCuZn-D of QQ-R-571 and having a minimum tensile strength of 70,000 p.s.i.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.2.2 Fabricating terms. All bends, forms, seams and joints of the metal specified herein shall be as defined in Federal Standard No. 187 unless otherwise specified.

3.4.3 Assembly. The joining of all members shall result in a compact unit of sufficient strength to prevent distortion, breakage of loosening of any part of the desks during heavy duty daily usage and to withstand rough handling in moving. The legs shall not be attached to the desk, but shall be wrapped to protect the finish and shall be secured to the inside of one of the desk drawers. The proper number of machine screws, nuts, and lockwashers or self-tapping screws and lockwashers, (as applicable), shall be bagged in a cloth bag and packed with the legs. There shall be no obstructions in the leg mounting provision in the bottom of the pedestals and end panels that would prevent the easy mounting of the legs in the field with simple tools. When mounted onto the desk, no part of the leg shall extend beyond the front and rear of the pedestals and end panels. The desk top shall be removable, yet it shall be securely attached to the desk in such a manner as to prevent individual vertical and horizontal movement of any part of the top. Measured from the pedestal, the overhang of the top shall be not less than 3/16 inch nor more than 1-1/4 inches. The overhang at the front and rear shall be equal and the overhang at the sides shall be equal, but it is not required that the overhang be equal on all four sides. When drawers and sliding shelf are in the closed position, they shall set squarely in the pedestal opening and the drawer and sliding shelf fronts shall be flush with, or inset the face of the pedestal not more than 1/16 inch. Welding of subassemblies shall be as specified for each part. The type II typewriter platform units shall be individually packed and shipped separate from the desk.

3.4.4 Top. The overall height of the edge moulding plus the binding strip shall be not less than 1-1/8 inches nor more than 1-9/16 inches. The top plate shall be of 16 gage (0.0598 inch) steel, and shall be rigidly reinforced to conform to the test specified in 4.6.2. Alternatively, the top plate shall be not less than 18 gage (0.0478 inch) steel provided it is reinforced lengthwise, (side-to-side), by one of the following methods:

(a) At least three reinforcements, not less than 20 gage (0.0359 inch) steel, two of which shall be hat sections with not less than two rib formations or embossings extending full length of the piece on the widest surface of the section. These hat sections shall have a formed width of not less than 7 inches. The third reinforcement shall have not less than 2 bends.

(b) At least three reinforcements, not less than 18 gage (0.0478 inch) steel, one of which shall be a hat section and the other two shall each have a channel plus a flange formation. One each of the latter two reinforcements shall extend along the front and rear of the top and shall inset the edge moulding along the front and rear of the top. The formed width of each of these reinforcements shall be not less than 5-1/2 inches.

The 18 gage top plates shall be additionally reinforced,if necessary,to conform to the test specified in 4.6.2. All spotwelding of steel components to the top plate shall be on not more than 6 inch centers. The top plate shall be covered with plastic laminate sheet as specified in 3.2.2. The plastic laminate shall be bonded uniformly to the top plate by an adhesive recommended by the adhesive manufacturer or the plastic laminate manufacturer for use with metal and plastic laminate. The plastic laminate shall be applied at a controlled temperature and sufficient pinch roller pressure (approx. 50 lbs.) to insure permanent bond between the plastic laminate and the entire top plate surface. A back-up under the top is required as a part of the rolling process. The steel top plate shall be properly cleaned prior to application of the adhesive. The edges of the top covering shall be chamfered to provide an area for the binding strip to hold the covering against the top plate. The edge moulding shall be 18 gage (0.0478 inch) steel. The inside edge of the bottom of the edge moulding shall be formed to eliminate sharpness. Alternatively, the edge moulding may be of 20 gage (0.0359 inch) steel, provided it interlocks with 18 gage (0.0478 inch) steel top reinforcements and there is no sharp edge along the bottom edges of the moulding or on the interlocking reinforcements. The binding strip specified in 3.2.3.4 shall be securely held in place but permit removal and shall closely fit the top material along the perimeter of the top. The top of the binding strip shall not project above the surface of the top covering at any point along the perimeter of the desk top. The binding strip shall be either flush with the outside of the edge moulding or may extend outside it by not more than 3/32 inch. The corners of the desk tops shall be rounded to a 1/2 inch (minimum) radius, or shall have graduated curvatures at the corners which eliminate square corners but are not true radii.

3.4.4.1 Control panels for plastic tops. Two sample control panels 12 inches by 24 inches shall be prepared under plant conditions, for each 1,200 desk tops processed (or as often as determined necessary by the Government to maintain good quality control), using the steel sheet, plastic laminate and adhesive materials and the same time-temperature-pressure cycle as used for the desk tops. Test specimens from the sample control panels shall pass the test in 4.6.10 without evidence of delamination, cracking or blistering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.5 Pedestal. The pedestal sides and back shall be formed from one piece of 20 gage (0.0359 inch) steel with front edges formed channel shape. The four outside vertical edges of the pedestal shall be rounded by not less than 3/8 inch radii and bottom horizontal edges of the pedestals shall be rounded by not less than 1/4 inch radii. Alternatively, the rounding of these edges shall be accomplished by use of compound radii. The top edges of the pedestal sides and back shall have 90 degree flanges. A pedestal bottom of 20 gage (0.0359 inch) steel shall be securely welded to the bottom of the pedestal sides and back. The front of the pedestal bottom shall be formed in a return flange formation with the bottom edge rounded as specified above for the outside edges of pedestal. The face of the front of the pedestal bottom shall be flush with face of the pedestal sides and shall be securely held in this position by internal reinforcing. Two bottom reinforcements of 14 gage **(0.0747 inch)** steel, with hat section formation, shall extend across the full width of the bottom. The reinforcement near the rear shall be securely welded to the bottom and the rear vertical. The reinforcement near the front shall be securely welded to the bottom and the front verticals. Alternatively, the pedestal bottom may be 22 gage (0.0299 inch), steel, the front bottom reinforcement may have not less than two bends, and the rear bottom reinforcement may have not less than three bends provided an additional hat section reinforcement of not less than 14 gage (0.0747 inch) steel is securely welded between the front and rear bottom reinforcements. Provision shall be made in the pedestal bottom and bottom reinforcements for the application of the legs. The pedestal shall have not less than four vertical reinforcements, two on each side, of 18 gage (0.0478 inch) steel. The front verticals shall have not less than three bends and the rear verticals shall have not less than two bends. The suspension case member mounting surface of the verticals shall be on the same plane as the outside surface of the pedestal shell front return flange. The inside of the pedestal shall have a felt composition sound-dampening material not less than 0.080 inch thick permanently adhered to the sides and back. At least 1/2 the area of each of the sides and the back shall be covered by the sound-dampening material. One Typewriter platform retainer shall be securely attached to each pedestal. It shall extend the full width of the pedestal opening and the location of that part of it which retains the typewriter platform, (in the relation to the top drawer and the front of the pedestal) must be held as indicated in Figure 2. This retainer shall be of not less than 14 gage (0.0747 inch) by 1/2 inch steel, or, alternatively, shall be of not less than 18 gage (0.0478 inch) steel formed in such a manner as to provide equivalent strength and rigidity.

3.4.6 End panels. The end panel shall be constructed of two basic pieces. The outside panel and the inner panel. The four vertical outside edges shall have not less than 3/8 inch radii. The outside panel shall be formed in box shape from 20 gage, (0.0359 inch) steel, with 90 degree flanges at the top and with the bottom edge formed channel shape. The inner panel shall be formed of 22 gage, (0.0299 inch) steel. The sides of the inner panel shall be flanged and the bottom edge shall be folded to interlock with the outside panel or the two panels shall be formed and welded together. Alternatively, the end panel may be one-piece construction of 20 gage (0.0359 inch) steel. The ends of the panel shall terminate in 90 degree flanges formed inward with provisions for securing together. The vertical seam shall be tight and equidistant from the ends of the panel, (plus or minus 1/8 inch). The bottom of the end panel shall have a 90 degree flange, formed inward and continuous along the entire bottom contour of the end panel. The top of this panel shall have 90 degree flanges. In either type of construction, the interior of the end panel shall be sufficiently reinforced to prevent "oil canning" of both outside and inner panels and to assure that it will hold its strength and shape through the abuse of shipping and moving. All vertical seams shall be on the kneespace side of the end panel. The end panel shall be attached to the top by means of steel brackets 11 gage (0.1196 inch). Each bracket shall be bolted to both the top and the end panel at a minimum of two places each. Alternatively, the brackets shall be securely welded to the assembled end panel and bolted at not less than two places to the assembled top.

3.4.7 Legs. The legs shall be of the general configuration shown in Figure 1 or may be the sloped, rectangular type. When the former configuration is used, the legs shall be made of a die cast, non-ferrous metal and shall be finished in a color that matches the desk, or they shall be of moulded, non-woven, fiber glass, mat-filled polyester in color, which matches the color of the desk. These legs shall have a rubber pad or rubber base glider not less than 1-1/4 inches in diameter on the bottom. When sloped, rectangular type is used, that part of the leg facing the front and rear of the desk shall be not less than 1-1/4 inches wide, the full height of the leg, and that part facing the sides of the desk shall be not less than 2-1/4 inches wide full height or shall be not less than 2-1/4 inches wide at the top and sloped to not less than 1-3/4 inches wide at the bottom. All four vertical edges shall be rounded. This leg shall be of 16 gage (0.0598 inch) steel with a shroud not less than 0.0468 inch thick of one of the materials specified in 3.2.3.1. This leg shall also have a rubber pad or a rubber base glide not less than 1-1/4 inch in diameter on the bottom.

3.4.8 Rear Kneespace panel. The kneespace back panel shall be fabricated from 20 gage (0.0359 inch) steel and shall be formed for strength on all four sides. The formation along the bottom edge shall be a roll, bead, closed return flange or other formation that will prevent damage to wearing apparel and injury to the user. All desk kneespace panels shall be recessed to not less than 4-3/4 inches from the back of the pedestals except when the top part is formed toward the rear of the desk such as to clear a kneespace drawer and suspension, (generally Z shape in cross section), in which case the top part of the kneespace panel shall be behind the tangent line of the radius

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

on the vertical edge of the pedestal or end panel. The bottom of the panel shall be not more than 1-1/2 inches above the bottom of the pedestals and end panels, and not below the bottom edge of the pedestals and end panels. The kneespace panel shall be secured to the desk through the pedestal and end panel sides or at the top and bottom of the pedestal and end panel by use of 18 gage (0.0478 inch) minimum steel clips. When the panel is secured to the desk at the top and bottom as specified above and a Z style panel is used, the bottom corners of the top section shall be reinforced with not less than 18 gage (0.0478 inch) gussets.

3.4.9 Drawers. The number, kind and minimum inside clear dimensions of the drawers required shall be as shown on figure 1 and as specified herein. The drawer fronts shall fit square in the drawer opening horizontally and vertically, and shall show equal opening between the drawer front and pedestal frame, on the sides and top when the drawers are closed. Storage drawers, when open, shall extend not less than 20 inches from the inside front of the drawer to the front of the pedestal. The letter filing drawer shall extend, when open, not less than 21-1/2 inches from the inside front of the drawer to the front of the pedestal and shall have not less than 22-3/4 inches of open and easily accessible, filing space. Spot welds for all drawer body assemblies shall be on not more than 4 inch centers. The file drawer shall have one or two pulls, at the discretion of the manufacturer. Provision shall be made in the file drawer body for a follower-block (compressor). The drawers shall be interchangeable as specified in 3.3 and shall conform to the test requirements in 4.6.6, 4.6.7, 4.6.8 and 4.6.12.

3.4.9.1 Drawer fronts. The drawer fronts shall be of double wall construction. The top edge of the outer front shall be formed in a return flange to receive the inner drawer front. The side and bottom edges shall be formed in a return flange and an additional 90 degree flange to provide for welding to the drawer body (See Figure 3). The outer fronts shall be of 20 gage (0.0359 inch) steel if only the outer wall is used in attaching the drawer pull, or may be 22 gage (0.0299 inch) if the drawer pull is attached to both the inner and outer drawer fronts. All corners of the outer drawer fronts shall be neatly closed and free of sharpness and burrs with the top corners brazed and ground smooth along the entire mitered seam. The inner drawer front shall be of not less than 24 gage (0.0239 inch) steel, flanged on all edges and the top edge shall interlock with the top channel of the outer front. The bottom edge of the inner front shall be held in place by formation in the drawer bottom. Alternatively the inner front shall be secured by the drawer pull, provided the attaching points in the inner front are recessed. If the formation providing the recess extends to the sides of the inner front, the side flanges may be notched away for the formation. This notch shall not exceed 1-1/2 inches in length. Alternatively, the inner front may be welded to the drawer body provided access to the pull attachments is provided.

3.4.9.2 Drawer bodies. The storage drawer body shall be formed from one piece of 24 gage (0.0239 inch) steel. The file drawer body shall be formed from one piece of 22 gage (0.0299 inch) steel. Alternatively, the file drawer body may be of 24 gage (0.0239 inch) steel, provided there is a channel formation extending full depth and centered on the bottom of the drawer body. The top edge of all drawer sides shall be beaded, channeled or folded for safety and reinforcement. All storage drawer sides shall be not less than 4-3/4 inches high and letter file drawer sides shall be not less than 5-3/4 inches high. All storage drawers shall have provision made for adjustment of crosswise partitions at intervals of 1-1/8 inch maximum.

3.4.9.3 Drawer backs. The back of all storage drawers shall be securely welded to the drawer sides and bottoms, and shall be not less than 22 gage (0.0299 inch) steel, with the top edge formed for additional strength. The back of the file drawer shall be of 20 gage (0.0359 inch) steel welded square to the drawer sides and bottom. Alternatively the file drawer back shall be not less than 22 gage (0.0359 inch) steel provided then entire top edge is formed with a bead or flat fold to add strength and eliminate a sharp edge. The file drawer back shall have a hand hole not less than 3-1/32 inches by 4 inches. The top of the hand hole shall have a roll, fold or bead formation to facilitate carrying of drawer without injury to hands. Spot welding of the backs of both storage drawers and file drawers to the drawer bodies shall be through 90 degree flanges in either the backs or the bodies. The height of the drawer backs shall be the same as the height of the bodies, with a tolerance of minus 1/16 inch.

3.4.9.4 Follower-Block (Compressor). The follower-block shall be the side locking type, shall be controlled by spring tension, shall operate easily within the drawer when released, and shall be held firmly when engaged. The clearance between the follower-block and its track or guide shall be kept to a minimum, so as to prevent the follower-block from facing off at an angle and out of square with the drawer sides when in operation, and from seating out-of-square when engaged. The compressor plate shall be of 18 gage (0.0478 inch) steel and the top edge shall be formed for strength. There shall be no burros or sharp edges on the assembled follower-block that might injure the user or damage the file material. That part of the follower-block which provides the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

gripping or engaging action shall not be serrated unless this action is accomplished with rollers, which shall be serrated. One follower-block shall be furnished with each file drawer.

3.4.9.5 Drawer partitions. The drawer partitions shall be of 20 gage (0.0359 inch) steel with the top edge having a bead or flat fold when single wall construction is used. Alternatively, the single wall partition shall be 22 gage (0.0299 inch) steel provided it is reinforced by not less than four horizontal embossings extending the full width of the partition and the top edge is formed to eliminate a sharp edge. Double wall partitions shall be of 24 gage (0.0239 inch) steel with a rounded top edge and not less than two reinforcing dimples for welding the two walls together. Two partitions shall be furnished for each storage drawer which shall fit securely into the adjustment feature of the drawer sides.

3.4.10 Drawer suspensions and stops. The storage drawers shall operate on slide suspensions, with nylon glides, of the type specified in 3.4.10.1. The file drawer shall operate on a progressive side-arm suspension, or on a progressive cradle suspension of the types specified in 3.4.10.2 or 3.4.10.3. The suspensions shall comply with the tests specified in 4.6.6 and 4.6.7. The stops for the storage and file drawers shall be as specified in 3.4.10.6.

3.4.10.1 Slide Suspension. The case track shall be of 16 gage (0.0598 inch) steel formed channel shape and shall be secured to the pedestal inside vertical reinforcements as specified in 3.4.10.4. The drawer track shall be of 16 gage (0.0598 inch) steel formed channel or "Z" shape with the bends so located as to provide maximum strength to the bearing surface. Alternatively, drawer track may be 18 gage (0.0478 inch) steel provided the track is formed with both a channel and a flange, and provided one flange is spotwelded to the drawer side and the other is spotwelded to the drawer bottom. It shall be secured to the sides of the drawers by two rows of spotwelds on not more than 4 inch center, or alternatively, by one row of staggered spot welds on not more than 3 inch centers diagonally measured. Alternatively, the storage drawer track may be formed as an integral part of the drawer body provided the total metal thickness of the bearing surface is equal to or exceeds 16 gage (0.0598 inch) steel in thickness, and a steel channel or zee formation in structural rigidity. There shall be a sufficient number of nylon glides on each suspension, positioned to eliminate metal-to-metal contact between drawer and case tracks and to satisfy the pull test specified in 4.6.7. The glide shall be designed to insure against the head shearing off during operation of the drawer or while removing and inserting the drawer. The glide design shall also insure against loosening or falling out.

3.4.10.2 Progressive side-arm suspension. The steel used for the neutral members shall be of 16 gage, (0.0598 inch) and as specified in 3.2.1. After forming to shape, the neutral members shall be cadmium plated in accordance with QQ-P-416, Type I, Class 3 or zinc plated in accordance with QQ-Z-325, Type I, Class 3. Alternatively, black oxide coating may be used, provided the entire member is then coated with a clear organic finish which dries to a hard film. There shall be at least five solid steel balls or four rollers on each neutral member. The balls and rollers shall be as specified in 3.4.10.5. When rollers are used, at least three of them shall be the fixed journal ball bearing type and the other roller (s) may be the plain stud bearing type. If the design of the suspension is such that a separate housing is required for rollers or balls, the housing shall be of 16 gage, (0.0598 inch) steel, welded to the neutral member at each end by not less than two spotwelds. Balls or rollers shall be incapable of dislocation or removal unless the suspension is intentionally dismantled.

3.4.10.3 Progressive cradle suspension. This type shall have two neutral members and not less than two tie members, all of which shall be of 16 gage, (0.0598 inch) steel as specified in 3.2.1. The neutral members and tie members shall be joined by not less than two spotwelds at each connection. After forming to shape, all members shall be cadmium or zinc plated, (except for areas burned during the welding process), or shall be coated with black oxide as specified in 3.4.10.2. Each neutral member shall have at least four rollers, three of which shall be fixed journal ball-bearing type and the other roller (s) may be the plain stud bearing type, (see 3.4.10.5). Rollers shall be incapable of removal or dislocation unless the suspension is intentionally dismantled.

3.4.10.4 Drawer and case tracks (Progressive suspension). The file drawer and case tracks for the progressive suspension shall be hot or cold rolled 14 gage (0.0747 inch) thick steel. After forming to shape, the drawer and case tracks shall have a Rockwell hardness of 70 - 85 on the "B" scale, or equivalent hardness on a comparable scale. The drawer and case tracks shall be finished in accordance with 3.6. Alternatively, the case tracks shall be plated or coated with black oxide as specified for the neutral members in 3.4.10.2. The case tracks shall be secured to at least the front and rear pedestal interior reinforcing members by interlocking of lugs on the case tracks into appropriate openings in the interior reinforcing members. The interlocking shall provide secured connections without vertical or horizontal movement. Alternatively, the case tracks may be bolted to at least the front and rear pedestal interior reinforcing members to provide a comparable connection. The drawer tracks shall be attached to the drawer sides by spot welding as specified in 3.4.10.1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.4.10.5 Rollers and solid steel balls. The rollers for the progressive suspension shall be the fixed journal ball-bearing and fixed journal plain, stud bearing types. They shall be accurately turned from steel rod, case hardened, shall be not less than 7/8 inch in diameter, and not less than 7/32 inch thick, and both edges shall be radiused or chamfered. Alternatively, fixed journal ball bearing rollers may be cold formed from cold rolled steel and case hardened. Cold formed rollers shall be not less than 7/8 inch in diameter and not less than 1/4 inch wide axially, and both edges shall have a radius. Cold formed rollers shall be of the unitary type, consisting of a one piece outer and a one piece inner race, with an unbroken smooth surface in the raceway and a smooth unbroken rolling surface on the outer race, with the edges of the outer race chamfered, or formed with a radius, or a combination of both. The outer and inner races shall be concentric to within plus or minus 0.0025 inch, and the entrie outer rolling surface shall be parallel to the axis of the bearing to within plus or minus 0.0025 inch. Also alternatively, steel ball bearing rollers with full width nylon tires may be used on the progressive suspension provided, at least three of the rollers on each neutral member are not less than 1-1/4 inches in diameter and all the rollers are not less than 7/32 inch thick. Nylon-tire rollers shall not go through the baking cycle. Solid steel balls for the progressive suspension shall be not less than 3/8 inch diameter, hardened and polished.

3.4.10.6 Drawer stops. All drawers shall engage two (2) positive stops (one each side of drawer) which will prevent the drawer from falling out when fully extended, but will permit easy removal of the drawer when desired. The stops encountered by the storage drawers on the inward and outward movement and on the file drawer inward movement shall be equipped with bumpers of rubber or other durable energy absorbing material.

3.4.11 Sliding shelves and utility drawers. The face of the sliding shelf and utility drawer shall be equal but shall not be more than 2 inches in height. The sliding shelf and the utility drawer shall operate smoothly, silently and easily. The two front corners of both shall be brazed and ground smooth. Both the sliding shelf and the utility drawer shall extend, horizontally, not less than 14 inches from the front of the top of the desk and both shall be removable, but they shall not be capable of unintentional removal when fully extended. Both items shall strike stops of rubber, felt, coil spring, leaf spring, or other noise reducing material in both the inward and outward operation. The sliding shelf and utility drawer runners shall be formed of 16 gage (0.0598 inch) steel and shall be securely welded or bolted to the pedestal. The sliding shelf shall be of 20 gage (0.0359 inch) steel with all four sides formed and reinforced for strength and rigidity. The parts comprising the utility drawer shall be of 22 gage (0.0299 inch) steel. The utility tray shall be equipped with convenience tray type compartments, three small sections not less than three inches wide and one pencil section. Both the sliding shelf and utility tray shall be equipped with knobs or pulls of the material specified in 3.2.3.1 or shall be spring activated.

3.4.12 Typewriter platform. The typewriter platform shall be of the type that rests on the top of the top drawer in the desk pedestal and hooks behind a platform retainer in the pedestal. See Figure 2. It shall be adaptable to both left-hand and right-pedestals. It shall be shipped knocked down (KD). Complete assembly and desk attachment instructions shall be packed with each platform. All the screws, nuts, and lockwashers necessary to assemble the typewriter platform in the field shall be bagged in a cloth bag and packed with the platform. Four stationary trays, (See 3.4.12.3), shall be wrapped to protect the finish and packed with each typewriter platform. No special tools shall be required to assemble the platform or attach it to the desk. When attached to the desk, the courtesy shield shall not interfer with the opening of any drawer in the pedestal except the top drawer. The overall height of the typewriter platform, (with the glide screwed into the leg as far as it will go), shall be 25-3/4 inches, (See 3.5.1). The typewriter platform shall have any additional structural features beyond those specified herein that the contractor deems necessary to assure compliance with the test specified in 4.6.1. All parts of the typewriter platform shall be free of roughness, burrs, and sharp edges to prevent damage to clothing and personal injury.

3.4.12.1 Typewriter platform top. The size of the typewriter platform top shall be 20 inches (front to rear) by 17 inches, plus 0, minus 1/4, (side to side) by not less than 1-1/4 inches high. The top shall have double wall construction with the entire cavity between the top and bottom pieces filled with not less than 99 pounds paper honeycomb. The top piece shall be of not less than 22 gage (0.0299 inch) steel and the bottom piece of not less than 18 gage (0.0478 inch) steel. The paper honeycomb shall be permanently bonded to the inside of both pieces and the top and bottom pieces shall be welded together. Alternatively, the top shall be of single wall construction with the steel top of not less than 16 gage (0.0598 inch) steel. The steel top shall have a return flange formation on all four sides and shall have at least two reinforcements of not less than 18 gage (0.0478 inch) steel welded to it. The four corners shall be welded or brazed and pound smooth. Both types of construction shall have a platform hook-on member securely attached to one end of the top. It shall be of the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

general configuration shown in Figure 2, shall be not more than 13-9/16 inches long and shall hold the Type II unit snugly against the desk pedestal. This hook-on member shall be of not less than 18 gage (0.0478 inch) steel and the face that parallels the face of the drawer front shall have at least two bumpers of rubber, felt, or cork securely attached to it in such a manner that they will not unintentionally fall off during use. It shall have two angle shape pieces not less than 18 gage (0.0478 inch) steel welded to it as shown in Figure 2. The legs of these angles that extend downward fron the hook-on member shall be not less than 1-1/8 inches long. Both types of top construction shall have self-edged laminated plastic (See 3.2.2), on the top and three sides.

3.4.12.2 Typewriter platform courtesy shield and leg. The courtesy shielf shall be double wall construction with the entire area between the two panels filled with not less than 99 pound paper honeycomb. The honeycomb shall be permanently bonded to both panels. The two panels shall be welded or brazed together. Alternatively, not less than two 20 gage (0.0359 inch) steel zee shape reinforcements (equally spaced), shall be welded to the inside of both panels in lien of using the honeycomb. Both the inner and outer panels shall be of not less than 20 gage (0.0359 inch) steel. Three sides of each panel shall be flanged inward and the top of each panel shall be flanged outward. The top flanges shall have provision for attaching the courtesy shield to the platform top at 3 points in each flange. They shall be equally spaced with the end attachments not more than 1-3/4 inches from the end of the shield. The courtesy shield shall extend not less than 10 inches downward from the underside of the platform top and shall be not less than 1/2 inch nor more than 3/4 inches thick. The leg shall be of not less than 16 gage, (0.0598 inch) steel and shall be not less than one inch square. The bottom of the leg shall have an adjustable glide as specified in 3.2.3.6. The leg shall be securely welded or brazed to the courtesy shield.

3.4.12.3 Stationary trays. Four sloping stationary trays as described below shall be packaged with each typewriter platform. The trays shall be not less than 3/4 inch apart and shall accommodate adequately 8-1/2 by 11 inch paper. The top edge of sloping trays including cutout portion (when so designed) shall be folded or beaded to protect fingers and the bottom edge shall be flanged up, fitting tightly against the tray above to prevent papers from slipping between the trays or between the tray and the drawer bottom. The trays shall interlock with each other, making them a single, four compartment unit which shall in turn, interlock with the drawer partition; or the trays and the partition may be welded making them a single unit; or the trays may be welded together making them a single unit that will interlock with a drawer partition. The tray assembly shall fit snugly into any storage drawer in any given desk, maintaining the proper slope.

3.5 Dimension. The basic dimensions shall be as specified in 1.2.1 and as shown in figures 1 and 2. All other dimensions shall be as specified herein.

3.5.1 Tolerances. The following tolerances shall be permitted:

Width of desk top - plus or minus 1/2 inch.
Depth of desk top - plus or minus 1/4 inch.
Overall height of desk - plus 3/4 inch, minus 0.
Overall height of typewriter platform - plus 1/4 minus 1/2 inch.

Tolerances for all other dimensions shall be as normally used by the industry, unless otherwise specified.

3.6 Pretreatment and finishing.

3.6.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces, shall be treated for painting in accordance with any method of Federal Specification TT-C-490.

3.6.2 Priming. Unless otherwise specified herein, all exterior and interior surface (except the top of the top plate) treated as specified in 3.6.1 shall be coated with primer specified in 3.2.5.1. Primer may be omitted from any surface prepared in accordance with type I or type II of TT-C-490.

3.6.3 Enameling. All primed surfaces of the desk and typewriter platform shall be coated with enamel as specified in 3.2.4.2 and 3.2.4.2.1 and shall be baked at a time-temperature cycle recommended by the enamel manufacturer. Total dry file thickness of enamel and primer shall be not less than 1.4 mils. on all "wear areas" (outside edges of top, outside surfaces of legs, all drawer fronts, and front face of sliding shelves and utility drawers), and not less than 1.0 mils. on other surfaces, inside and outside of the desk. Surfaces prepared in accordance with TT-C-490 (See 3.6.2) shall have a dry enamel file thickness not less than 1.1 mils. on all "wear areas", and not

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

less than 1.0 mils. on all other surfaces, inside and outside of the desk. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grits, areas of thin film or no film, and separation of color. Finish panels shall withstand the test specified in 4.6.3.

3.7 Identification marking. Unless otherwise specified, each desk shall be permanently marked on the kneespace side of the back panel, starting 8 inches from the top and each typewriter platform shall be permanently marked on the kneespace side of the courtesy shield starting 4 inches from the top, in a plain legible manner with the specification number, the Federal stock number, the month and year of manufacture, the contractor's name or trade-mark, and the contract number, so that the source of supply may be readily determined. When specified, identification marking shall be in accordance with MIL-STD-130.

3.8 Workmanship. A high degree of craftsmanship shall be exercised while performing the various operations of manufacture to eliminate the possibility of personal injury due to burrs and sharp edges; to assure that the occurrence of defects will not exceed the acceptable quality level specified herein; and to produce a finished commodity that is satisfactory in function, serviceability and appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Inspection responsibility. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribe requirements.

4.1.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.2 Lot acceptance tests. Lot acceptance tests shall be conducted under the supervision of the Government Inspector at the manufacturer's plant. In the event the manufacturer does not have the facilities to perform the required tests, he shall engage the services of the commercial testing laboratory acceptable to the Government. Copies of the laboratory report shall be submitted to the Government inspector upon receipt from the laboratory. All examination and testing shall be in accordance with Section 4 of this specification.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.4 End item inspection.

4.4.1 Visual examination. Examination of the desks shall be in accordance with the classification of defects specified in Table I and acceptable quality levels (AQL's) specified in 4.5.3. The lot size shall be expressed in units of desks for the purpose of determining the sample size in accordance with MIL-STD-105. The sample unit for this examination shall be one complete desk.

Note: Only one of defects in brackets shall be scored for each unit of product examined.

TABLE I. - Classification of defects

Examine	Defect	Classification Major	Classification Minor
Enamel finish	Poor adhesion, i.e., blistered checking or peeling.		
	Tacky (not dry to touch).		
	Color Separation, stain, or not smooth and uniform.		X
	Runs, sags, or foreign matter in coating on any exterior surface.		
	Abrasion or area of thin coating		
	Wrong color.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. - Classification of defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
	Scratch through to base metal, or bare spots.	X	
	Rust under coating.	X	
Metallic Coating	Wrong type.	X	
	Poor adhesion, i.e., blistered, peeling, flaky, stained or discolored.	X	
Workmanship and Construction (General)	Any part missing, except bolts, nuts and lockwashers.	X	
	Malformed parts affecting servicability.	X	
	Broken, punctured, or cracked parts.	X	
	Sharp edge or projection that may cause injury.	X	
	Holes for self-tapping screws not extruded or wrong diameter.		X
	Bolt hole in wrong location or larger than specified.		X
	Malformed, damaged, buckled, or warped parts affecting appearance.		X
	Any dent on exposed surfaces affecting appearance.		X
	Component not of material specified.	X	
Bolts, Screws, nuts, lockwashers	Not metal plated.	X	
	Threads stripped on more than on bolt.	X	
	More than one bolt, screw, nut or lockwasher missing.	X	
	Threads stripped on one bolt.		X
	One bolt, screw, nut or lockwasher missing.		X
Welds	Welding and brazing not as specified.	X	
	Burnt through, cracked, fractured or not fused.	X	
	More than one spot weld missing at any one joint.	X	
Steel	Not stretcher level standard of flatness for parts specified.		X
	Not gage specified.	X	
	Rust, scale, pits.	X	
Drawer pull	Not as specified in 3.2.3.3	X	
	Rough or sharp edges.	X	
	Not properly secured to desks.	X	
Binding strip	Not as specified in 3.2.3.4.	X	
Desk top	Material not as specified.	X	
	Top covering not properly adhered to top plate.	X	
	Top plate buckled, bulged or warped.	X	
	Top plate does not grip binding strip.	X	
	Edge molding has sharp edges.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. - Classification of Defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
	Corners not rounded as specified.		
	Binding strip loose or does not closely fit top material.		X
Drawers	Inside dimensions less than minimum specified.		
	Not constructed as specified.	X	
	Drawer extension less than specified.		
	Drawer front not square in opening, affecting appearance.		
	Storage drawers not equipped with 2 crosswise partitions on 1-1/8 inch (max.) centers.		X
Drawer suspension and stops.	Not of type specified.		
	Suspension not properly secured to drawer side and pedestal.	X	
	Not constructed as specified.		
	Stops let drawer bypass on inward or outward movement.		
	Stops do not have bumpers specified.		X
Stationery tray	Stationery tray not furnished or not as specified.		X
Pedestal	Construction not as specified.	X	
Legs	Not as specified.		
	Not properly secured to pedestal.		
	Not square with pedestal when secured in place, affecting appearance.		X
End panel (Class 2 desks)	Gage, grade of steel and construction not as specified.	X	
Rear knee space panel	Not height specified.		
	Not secured as specified.		
	Panel not properly formed.		X
Sliding shelf	Not provided with noise reducing stop.		
	Has sharp or unprotected edges affecting safety.		X
Typewriter platform	Construction not as specified.		
	Not adaptable to left and right pedestals.	X	
	Special tools required to attach and detach.		

4.4.2 Dimensional examination. Inspection will be made of desks for compliance with dimensions specified including thickness of metal and dry film thickness of prime coat and enamel; and the enamel where primer coat has been omitted. Any dimension not within tolerance specified shall be classified as a minor defect.

4.4.3 Inspection levels and AQL's. The acceptable quality levels (AQL's) expressed in defects per hundred units, and inspection levels shall be as follows:

	Inspection levels	AQL's
For examination in Table I Major	II	10.0
For examination in Table I Total	II	25.0
For examination in 4.4.2 (1 class)	II	4.0

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

4.5 Examination of preparation for delivery. An examination will be made to determine that packaging, packing and marking as required by Section 5 of this specification are complied with. Defects will be scored in accordance with Table II below. The sample unit shall be one shipping container. The lot size shall be the number of containers in the inspection lot. The inspection level shall be II of MIL-STD-105 and the AQL shall be 4.0 defects per 100 units.

TABLE II. Classification of defects

Examine	Defect
Marking	Incorrect, illegible, or improper size, location, sequence, or method of application.
Material	Any noncomforming components, component missing, damaged or otherwise defective affecting servicability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate securing of drawers or contents and inadequate padding of perimeter edges.

4.6 Tests.

4.6.1 Typewriter platform test. The platform shall be properly and securely mounted to the desk. A weight of not less than 175 pounds shall be applied to an area not to exceed 12 inches in diameter for at least one hour. The test area shall be in the center of the top. Measurements from the floor to the top surface of the platform shall be taken opposite the center of the test area, on the side not supported by the courtesy panel, before the weight is applied; at the end of the one hour period, and immediately after the weight is removed. The deflection of the platform shall not exceed 3/16 inch at the end of the one hour period with the weight on the platform; and shall show no permanent deflection in excess of 1/16 inch after the weight is removed. Any loosening of parts of any deflection which exceeds the above maximum allowance will be considered as failing to meet the requirements.

4.6.2 Top test. A weight of not less than 600 pounds shall be applied to an area not to exceed 12 inches in diameter for at least 5 minutes. The test area shall be at the front center of the knee-space. The desk top shall not deflect more than 1/8 inch and shall not take on any permanent set. See 4.6.11 for Level Test to be performed in conjunction with this test.

4.6.3 Finish test for steel panels. A 20 gage steel panel prepared in accordance with 3.6 shall be bent at room temperature around a 1/8 inch diameter rod to 180 degrees without cracking, flaking or loss of adhesion of the enamel.

4.6.4 Spot welds. Spot welds shall meet the peel test specified in MIL-W-12332(MR) and button diameter shall conform to Table II as specified therein.

4.6.5 Bend test for steel sheets. The steel sheets used for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain without showing any crystallization, cracks or fractures on the outside of the band.

4.6.6 Service test. The desk or desk pedestal of the desk being tested shall be bolted or otherwise secured in proper position. The file drawer shall be connected by the drawer pull to a machine which will operate the drawer. The machine shall have a postive means (no springs) for adjusting the length of its stroke so that the drawer will travel the full distance (not more than 1/2 inch clearance at each end of stroke) from back stop to front stop. The machine shall drive the drawer at a rate of 20 cycles per minute (plus or minus 2 cycles per minute). The machanism shall in no way contribute to the support of the drawer. The drawer shall be loaded with papers, guide cards and folders, or their equivalent weight, which shall be equally distributed from front to back of drawer and shall total 50 pounds. The suspensions of the drawer being tested shall be cleaned and lubricated with SAE 30 machine oil at the end of 10,000 cycles and shall have no further attention until the test is completed. At the beginning of the test and at each increment of 10,000 cycles, a drawer pull test as specified in 4.6.7 shall be conducted. The drawer suspension shall be considered as having failed the service test if the drawer fails to pass any of the required pull tests performed at or before the completion of 50,000 cycles. Should suspension failure be perceptible during the increments of 10,000 cycles, the machine shall be stopped and the drawer pull test specified in 4.6.7 shall be conducted at that point.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

4.6.7 Drawer pull test. The drawer to be tested shall be loaded with typical filing material such as papers, guide cards and folders or their equivalent weight equally distributed from front to back of drawer in the following amounts:

File drawer - 50 pounds
Storage drawer - 20 pounds

The test shall be conducted by passing a limp cord, attached to the center of the drawer pull, over a sheave with a weight applied to the free end. The force required to start the loaded drawer forward and to move it to its full outward limit shall be recorded.

The drawer operating force for the file drawer shall not exceed 3-3/4 pounds, except, when the drawer suspension assembly incorporates a feature which drops the drawer into place to facilitate closing of the drawer, the drawer operating force shall not exceed 6 pounds to bring the suspension out of the depression. At that point the drawer will be stopped and the operating force required to continue the drawer to full extension shall not exceed 3-3/4 lbs. The drawer operating force for the storage drawer shall not exceed 4-1/2 pounds.

4.6.8 Drawer interference test. With the drawers loaded with the weights specified in 4.6.7 the drawer fronts shall not touch each other at any point of extension, up to and including full extension when adjoining drawers are opened or closed at the same time.

4.6.9 Follower-block (compressor) test. The file drawer to be tested shall be loaded with filing material consisting of paper, guide cards and folders with a total weight of 30 pounds. The filing material shall be held against the front of the drawer by the follower block. The location of the follower block shall then be marked by a mark scratched on the bottom of the drawer. The apparatus specified in 4.6.6 for operating the drawer shall be connected to the drawer being tested and set in motion and made to operate 500 cycles. Upon completion of the 500 cycles the position of the follower block shall be indicated by a second mark scratched on the bottom of the drawer. The rearward movement of the follower block, as indicated by the distance between the two scratch marks, as a result of this test shall not exceed 1/4 inch.

4.6.10 Plastic laminate delamination test. Two test specimens, 4 inches by 24 inches, shall be cut from each of the sample panels prepared in 3.4.4.1. The test specimens shall be completely immersed in boiling distilled water for one hour, then removed and immersed in distilled water at 23 degrees, plus or minus 1.1 degrees Centigrade (c) (73.5 degrees, plus or minus 2 degrees Fahrenheit (F) for 30 minutes. The test specimens shall then be dried at 60 degrees, plus or minus 3 degrees C (140 degrees plus or minus 5 degrees F) in a circulating air oven for 20 hours. The specimen shall be removed from the oven, allowed to cool for 2 hours and then shall be bent over a 16 inch diameter mandrel in 3 to 6 seconds until the entire specimen is in contact with the surface of the mandrel. The specimen shall be examined for evidence of delamination, cracking and blistering.

4.6.11 Level test for top. Place a steel straight-edge on edge, diagonally (corner-to-corner) across the top. The length of the straight-edge shall be greater than the diagonal length of the top. There shall be no gap between the straight-edge and top greater than 1/16 inch at any point along the diagonal length of the top. This test shall be performed along both diagonals of the top before and after performing the top test specified in 4.6.2.

4.6.12 Drawer interchangeability test. Each storage drawer shall be inserted into each of the 6 storage drawer openings in the desk and each file drawer will be inserted into each of the 4 file drawer positions in the desk. With each change of drawers the tests specified in 4.6.6, 4.6.7, 4.6.8 shall be performed. The drawers shall interchange with ease without the use of special tools.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C, as specified (see 6.2).

5.1.1 Level A or B.

5.1.1.1 Sliding shelves. The sliding shelves and utility drawers, for each desk, shall be maintained in a closed position by acetate fiber pressure-sensitive adhesive tape, minimum 2 inches in width.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

5.1.1.2 Drawer edges. Exposed finished edge surfaces shall be protected with a full width strip of cellulose wadding secured with pressure-sensitive tape.

5.1.1.3 Drawers. Drawers shall be maintained in a closed position with tape specified in 5.1.1.1.

5.1.1.4 Finished surfaces. Top surface and edges shall be protected with a shroud or cover constructed of polyethylene material, minimum thickness 1 mil.

5.1.1.5 Desk top. Top surface and edges of top shall be protected with a pad or blanket of one of the following materials or a combination of the materials:

Shredded paper	Wood fiber felt
Excelsior (sealed ends)	Cellulose wadding
Macerated paper	Molded pulpboard
Wood wool	Cotton Wadding

The pad shall be secured with pressure-sensitive adhesive tape to prevent shifting, loosening, or becoming detached during shipment or storage. In addition, a pad of built-up corrugated fiberboard, extending from front to rear and down over the desk edges shall be provided. The pad shall have a minimum width of 30 inches and thickness a minimum 3/4 inch, positioned equidistant between the sides.

5.1.1.6 Corner pads. Each of the four outside corners of the desk shall be provided with full length corrugated fiberboard pads. The pads shall be built-up construction to provide clearance which will include the desk top overhang and the drawer pulls or die-cut to fold and fit around the corners a distance not less than 2 inches.

5.1.1.7 Base or platform. The desk shall be suspended on a platform or base constructed of double-wall corrugated fiberboard material, minimum bursting strength 275 p.s.i. The construction of the platform shall include die-cut openings to receive desk legs allowing the weight of the desk to be borne upon the bottom of the desk pedestal.

5.1.1.8 Cover box. The desk shall be packaged in a close-fitting doublewall, corrugated fiberboard box, minimum busting strength 275 p.s.i. The box shall consist of a bottom tray and a RSC-Half-slotted box type, with depth to extend down on all sides for stapling to the bottom tray. The staples shall be on approximately 5 inch centers. The top flaps shall be sealed by application of a commercially available adhesive normally used for sealing fiberboard and an application of a 3 inch wide strip of gummed paper tape, conforming to PPP-T-45 over the center seam and end seams of the box.

5.1.1.9 Typewriter platforms. Typewriter platforms shall be packaged knocked-down. The components shall be wrapped in cushioning material secured with pressure-sensitive adhesive tape. The complete platform shall be packaged in a close-fitting box conforming to PPP-B-636, class weather resistant. The box shall be waterproofed with tape in accordance with the appendix to the box specification.

5.1.1.10 Level C. The desk or typewriter platforms shall be packaged in accordance with the suppliers commercial practice.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Desks. Desks, packaged as specified above, shall be packed in a close-fitting box conforming to PPP-B-601, overseas type or PPP-B-621, class 2. Each box shall be provided with a shroud fabricated from material conforming to PPP-B-1055. All seams shall be sealed with adhesive in conformance with MMM-A-260. The box shall be closed and strapped in accordance with the appendix to the applicable box specification.

5.2.1.2 Typewriter platforms. Typewriter platforms, packaged as specified in 5.1.1.9, shall be packed in a close-fitting box conforming to PPP-B-601, overseas type or PPP-B-621, class 2. The box shall be closed and strapped in accordance with the appendix to the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

5.3.1 Level B. Desks, packaged as specified in 5.1, shall require no additional packing.

5.3.2 Level C. The desks or typewriter platforms, packages as specified in 5.1, shall be packed to insure carrier acceptance and safe delivery at destination at lowest rates, in containers complying with the Uniform Freight Classification Rules, or National Motor Freight Classification Rules, as applicable.


6. NOTES

6.1 Intended use. The desks covered by this specification are intended for use in all general office areas.

6.2 Ordering data. Purchasers should exercise any desire options offered herein, and the procurement documents should specify the following:

(a) Title, number and date of this specification
(b) Type and class of item required (see 1.2.1)
(c) Color of finish if other than gray (see 3.2.4.2.1)
(d) If special marking is required (see 3.7)
(e) Whether packaging and packing level A, B, or C is requires (see Section 5).

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

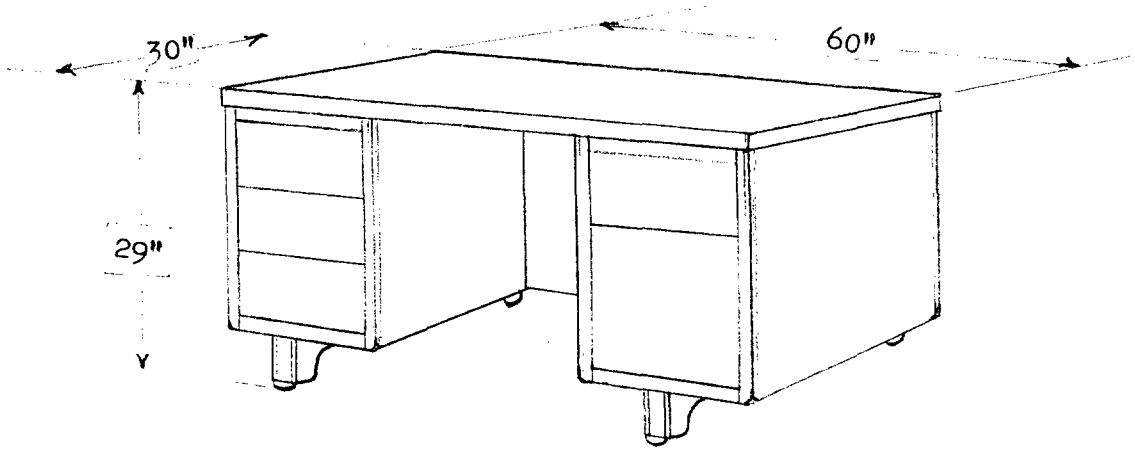


Type I, Class 1

Drawer data:

4 Storage drawers minimum inside clear 12 1/8" W x 5 1/2" H x 23 1/2" D
1 Letter drawer minimum inside clear 12-1/8" W x 10-1/4" H x 23-1/2" D

(Drawer pulls not shown)

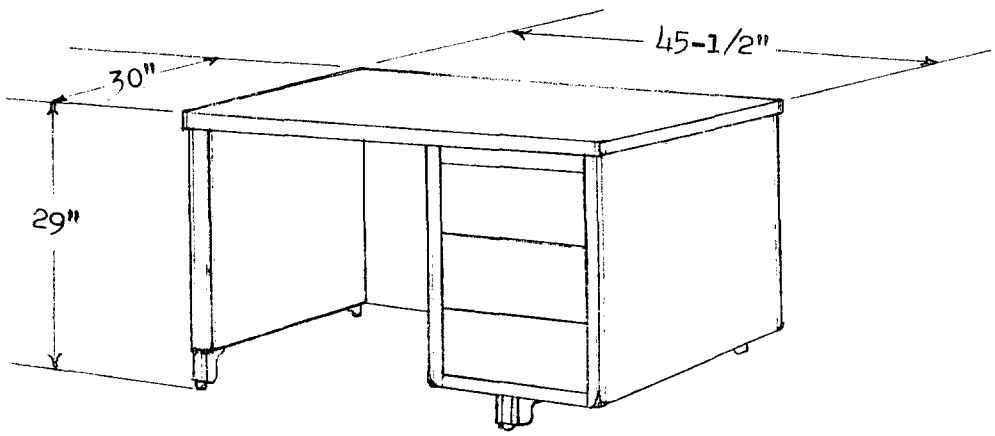

Type I, Class 2


Drawer data:

3 Storage drawers minimum inside clear 12 1/8" W x 5 1/2" H x 23 1/2" D

(Drawer pulls not shown)

FIGURE 1. Clerical desks

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

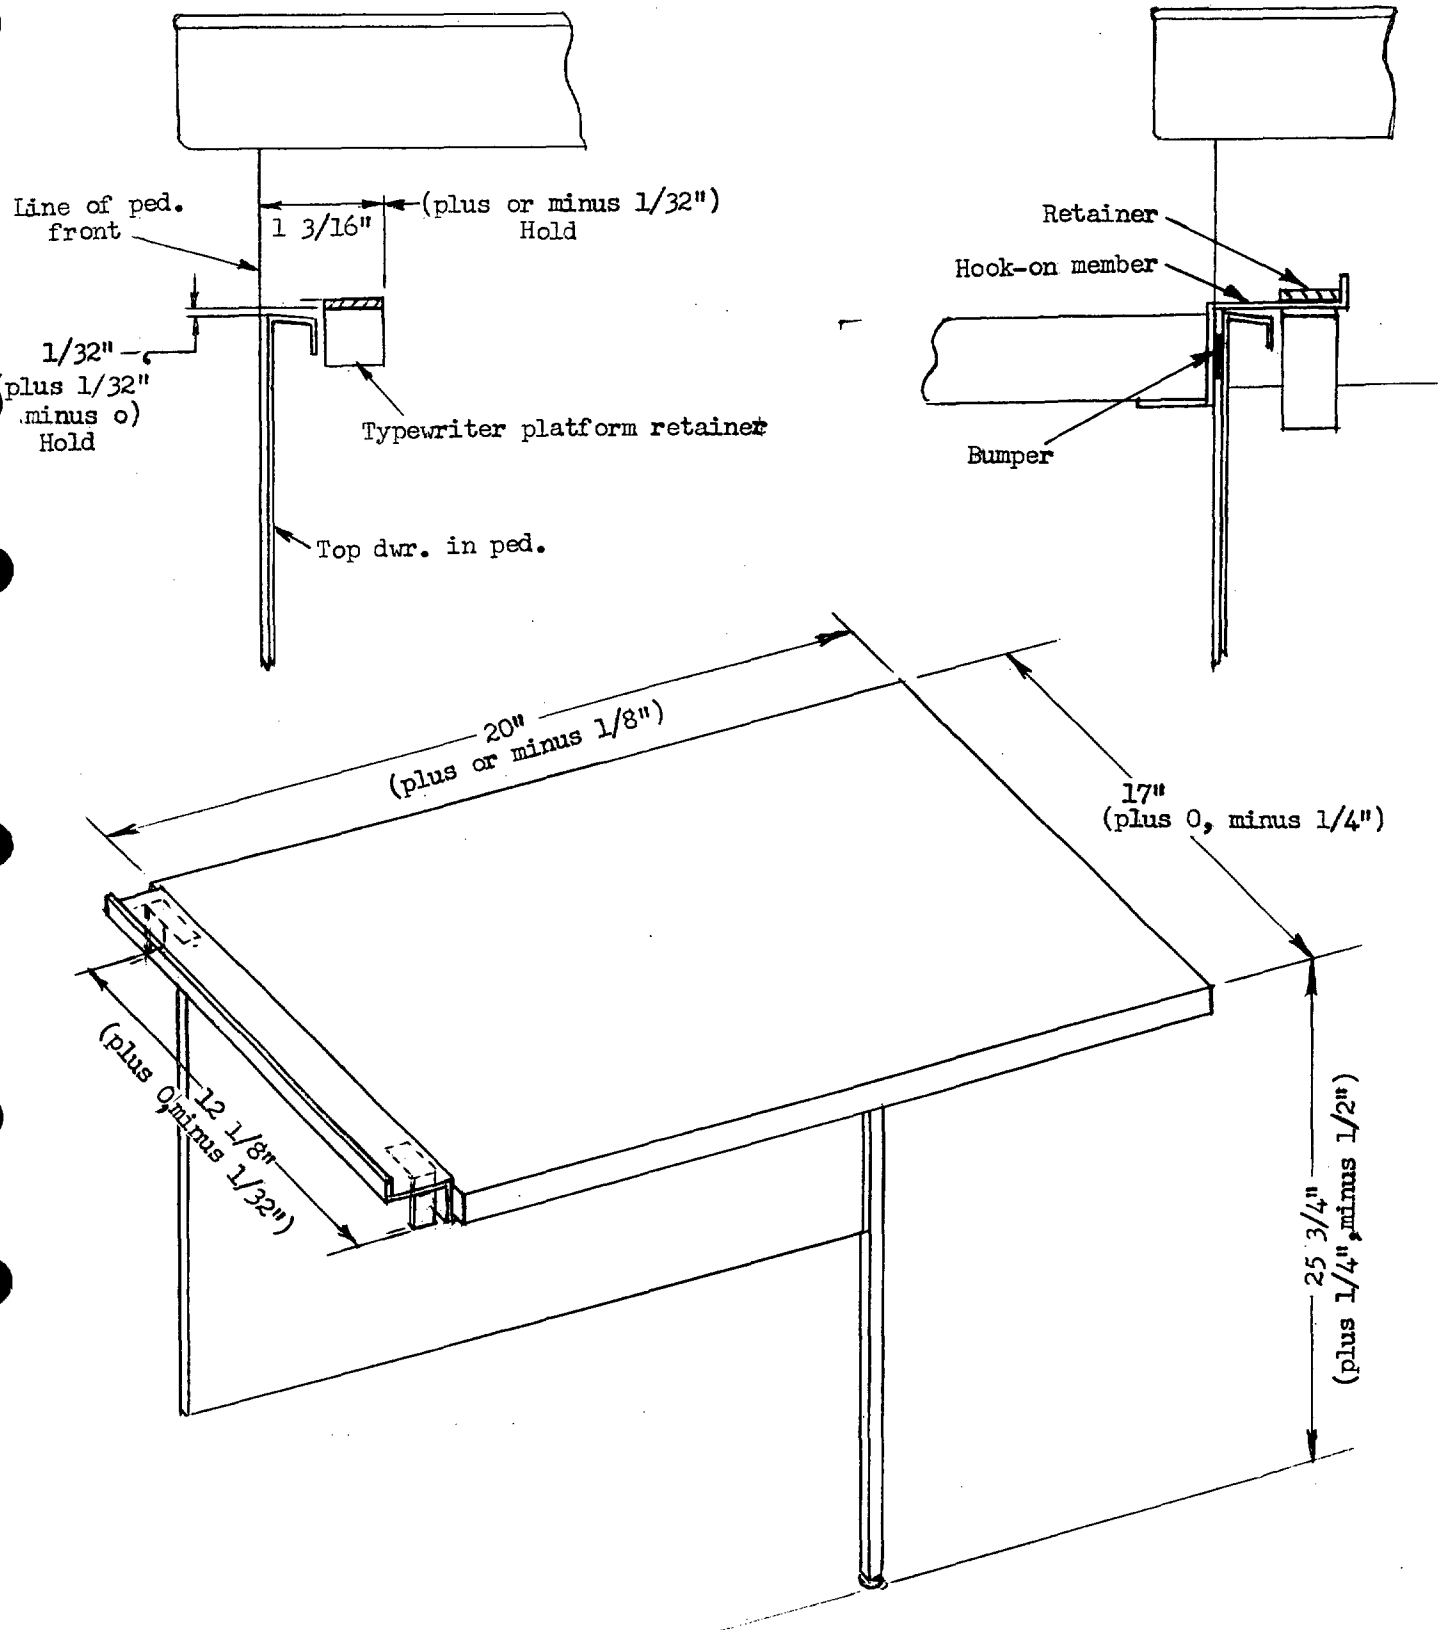


TYPE II
TYPEWRITER PLATFORM


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

X = Must be more than 90°
Y = Must be equal dimension

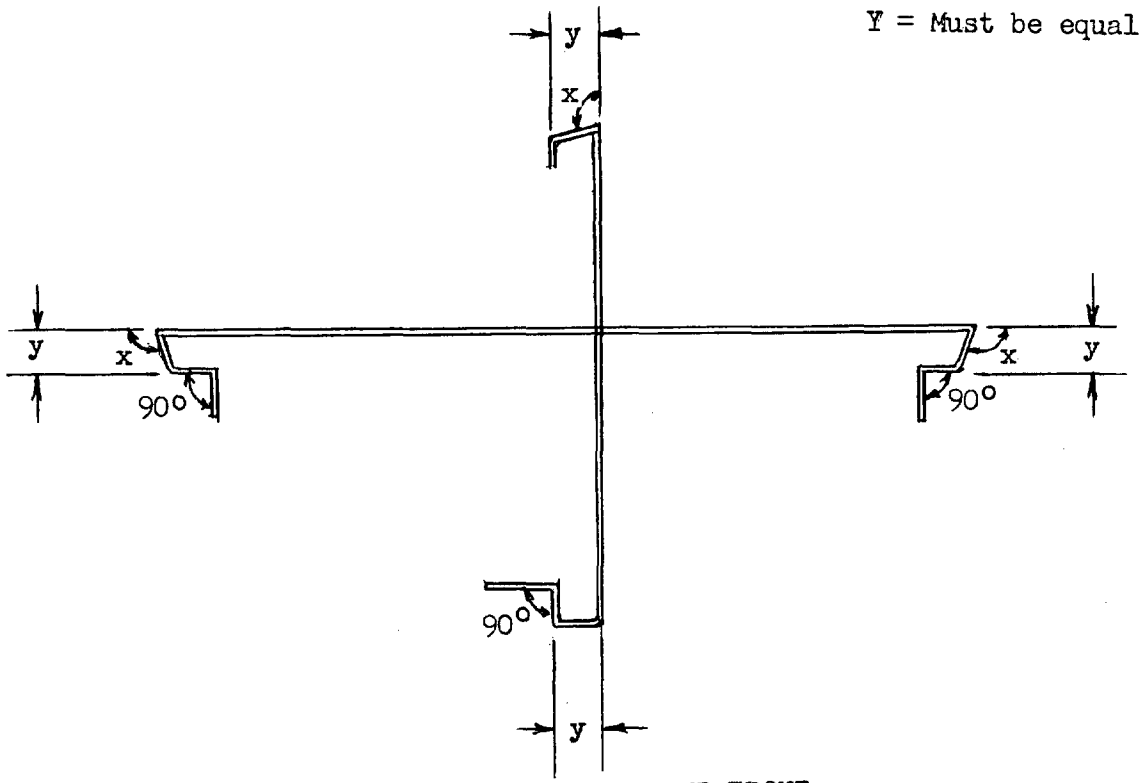

TYPICAL OUTSIDE DRAWER FRONT

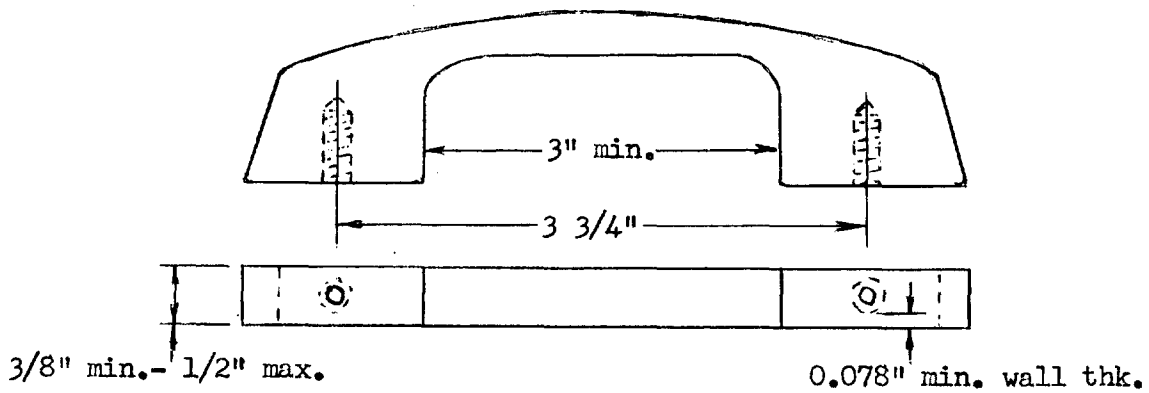

DRAWER PULL

FIGURE 3

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.