AA-D-001949
October 10, 1975

INTERIM FEDERAL SPECIFICATION

DORMITORY FURNITURE: MODULAR COMPOSITE METAL AND WOOD

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for various items of dormitory furniture designed for use in dormitories worldwide, including areas of high humidity, varying temperatures, and resistant to insect and fungal attack.

1.2 Classification. The types and styles of furniture covered by this specification shall be as follows:

Type I - Drawer chest.
  Style A - 5-drawer, 48" high x 32" wide x 20" deep.
  Style B - 6-drawer, 30" high x 42" wide x 20" deep.

Type II - Stereo chest, 30" high x 42" wide x 20" deep.

Type III - Grooming unit base, 39" high x 42" wide x 20" deep.

Type IV - Overchest, 14" high x 42" wide x 13-1/2" deep.

Type V - Shelving units.
  Style C - Open shelf bookcase, 50" high x 42" wide x 13-1/2" deep.
  Style D - Droplid bookcase, 50" high x 42" wide x 13-1/2" deep.
  Style E - Grooming unit top, 41" high x 42" wide x 13-1/2" deep.

Type VI - Vanity box.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

Federal Specifications:

L-P-508 - Plastic Sheet, Laminated, Decorative and Nondecorative.
QQ-R-571 - Rods, Welding, Copper and Nickel Alloys.
LLL-B-810 - Building Board (Hardboard), Hard Pressed, Vegetable Fiber.

Federal Standard:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks, and the Index of Federal Specifications and Standards, from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

Department of Commerce Publications:

CS-236 - Mat-Formed Wood Particleboard.

American Iron and Steel Institute:

Steel Products Manual.

(Application for copies should be addressed to American Iron and Steel Institute, 150 East 42nd Street, New York, NY 10017.)

National Motor Freight Traffic Association, Inc., Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, NW., Washington, DC 20036.)

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of each type and style of the finished commodity on contract and each component part thereof shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused in their present state and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Steel. The steel used to fabricate the frames, bases, and other applicable parts shall be commercial quality SAE 1010-1020 cold rolled steel. The gage numbers specified are the manufacturer's standard gages and are the minimum thicknesses permitted except the decimal equivalents shown are subject to the tolerances given in the Steel Products Manual. The steel shall be smooth, free of rust, loose scale, pits, scratches, laps, crimps, or buckles.

3.2.2 Hardboard. Hardboard for drawer bottoms shall be type II, surface 1, with a white enamel finish on the smooth surface and thickness of 1/8 inch as required in LLL-B-810. Hardboard for doors on overchest shall be type II, surface 2, and a thickness of 3/16 inch.

3.2.3 Particleboard. The particleboard shall be in accordance with any of the following types, grades, and classes in Commercial Standard CS-236:

Type I, grade A (high density), class 1:

Type I, grade B (medium density), class 2, except that panels less than 1 inch thick shall have a minimum average screw-holding capacity of 235 pounds on the edges and 285 pounds on the faces:

Type II, grade A (high density), class 2.

The thickness of the particleboard shall be as hereafter specified. The moisture content of the particleboard shall not exceed 9 percent at time of laminating.

3.2.4 Plastic laminate. Plastic laminate used on furniture in this specification shall conform to L-P-508. The laminate used on the panels for the furniture shall be one of the following types:

Style D, type I (general purpose), class 1, 0.050 inch thick.

Style D, type II (vertical surface), class 2, 0.031 inch thick.

Style D, type II (vertical surface), class 2, 0.031 inch thick, sub class "F".

Style ND, type V (backing sheet), 0.030 inch thick.

A tolerance of plus or minus 0.004 inch shall be allowed on the thickness of the laminate. The specific type, color, and pattern of laminate used on a particular component shall be as specified in 3.3.5, table I. The color and pattern shall match the GSA standard sample.

3.2.5 Hardware.

3.2.5.1 Sliding door pulls. Door pulls for sliding doors shall be the circular flush type with a 1-inch outside diameter. The finish of the pull shall be bright chrome. The depth of the pull shall be great enough to provide a fingergrip, but not so deep as to interfere with the movement of the adjacent door on the sliding track specified in 3.2.8.

3.2.5.2 Hinges.

3.2.5.2.1 Cabinet door. Butt hinges shall be chrome plated steel and shall have not less than five knuckles with a material thickness not less than 0.072 inches. The hinge shall not be less than 2 inches long and each flap shall be secured by three screws.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.5.2.2 Drop lid. The hinge shall be of any type which is concealed from normal exterior view when the drop lid is closed. The hinge shall allow the top surface of the drop lid to form a horizontal surface with the bottom shelf of the bookcase when the lid is open and allow the lid to be positioned as specified in 3.3.9.2.2.

3.2.5.3 Drop lid stays. The drop lid stays shall have a friction adjustment to allow the lid to drop smoothly at a controlled rate. The stays shall hold the drop lid horizontal to the bottom shelf of the bookcase and be strong enough to provide a firm writing surface.

3.2.5.4 Magnetic catches. Magnetic catches shall have a pull of 6-8 pounds and may have either an aluminum or plastic case.

3.2.5.5 Door latch and strike. The door latches shall be of the type which latch and open the cabinet door with a touch of the finger. The latch and strike shall be properly aligned and installed so that maximum throw is obtained from the latch with a minimum amount of pressure. The latch and strike combination shall provide a minimum throw of the door of 2 inches. The latch and strike shall be concealed from normal exterior view.

3.2.5.6 Glides. All glides shall have a minimum of a 1-1/2 inch base. The glides shall have a hex nut as an intergral part of the glide so that the glide may be adjusted by means of an open end wrench. The glides shall be adjustable over a range of at least 1 inch.

3.2.5.7 Shelf bracket. All adjustable shelves shall be provided with steel shelf brackets. Four brackets shall be provided with each adjustable shelf. The pin shall be solid and have a minimum diameter of 1/4 inch, and the length of the pin long enough to prevent the pin from tearing out of the sides of the unit when the shelves are loaded. The lip of the pins upon which the shelves rest shall be a minimum of 1/2 inch.

3.2.6 Sliding shelf suspensions. The slide suspensions shall be of the two-section type with the inner member operating on case hardened steel ball bearings which prevent the inner member from contacting the outer member. The suspensions shall be capable of supporting an average load of 100 lbs/pair.

3.2.7 Knockdown fastener. Knockdown fasteners shall consist of a female part or clip and a male part or shoulder screw. The clip shall be Modular Systems, Inc., Fastener No. 5063 or equal, and the shoulder screw shall be Modular Systems, Inc., Fastener No. 1065 or equal. The fastener shall have the following salient features. The fastener shall be totally concealed when the unit is assembled except when a panel must be attached between two preassembled panels. In this case, a special rout is permissible from the interior surface of the panel to the router pocket which contains the clip. The width of the special rout shall be held at a minimum, but wide enough to allow the passage of the shoulder screw head. The clip shall be so designed that a panel may be attached between two preassembled panels as described above. The clip shall create a wedging in the longitudinal axis of the shoulder screw so as to draw attaching panels firmly together. The shoulder screw shall be designed so that the portion of the screw which mates with the clip is separated from the threaded portion of the screw by a circular flange which functions to accurately locate the depth of the screw as well as transfer forces over a larger area. In all cases where knockdown fasteners are used, the clip and shoulder screw shall be located on the panels so that upon assembly, all edges of panels are flush with the surface and/or edges of the mating panels as required by the specification. The depth of the router pocket shall be controlled so that the wedging action of the clip upon the shoulder screw will pull panels securely together.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.2.8 Sliding door track. The sliding door tracks shall be of extruded aluminum or black self-lubricating polyethylene. The overall height of the track shall be a maximum of 5/8 inch. The track shall have an integral center divider so that two slides are created with a sufficient width to accommodate a 1/4 inch thick door in each slide. The track for the bottom of the doors shall be provided with a means of attaching the track so that the track abuts the front edge of the bottom panel. The base of the bottom track shall be flush with the bottom surface of the bottom panel, and the top of the track shall not extend above the top surface of the bottom panel. The top track for the top of the doors shall be securely attached to the bottom surface of the top panel. The two tracks shall be properly aligned so that the doors will slide easily without binding, interference, or excessive looseness of the doors in the tracks.

3.2.9 Medicine chest. The medicine chest shall be General Bathroom Products Corp. Model No. 500-P-ESSIE, or equal. The sides and back of the medicine chest shall be constructed from steel with a white enamel finish. The entire front of the chest shall be a door, the front surface of which shall be a framed mirror. The overall dimension of the chest shall, at a minimum, be 22 inches high by 16 inches wide, but the width shall not be greater than 18 inches. The minimum inside depth shall be 4 inches. The inside of the chest shall be provided with two shelves.

3.2.10 "Tee" molding. All "tee" molding specified shall be of the extruded design and shall be black in color. The proper size "tee" molding shall be used on the edge of the plastic laminate panels so that the edges of the "tee" molding "feather-down" even with the edges of the panels. The "tee" molding shall be straight and securely held to the panels by the proper size rout.

3.2.11 Grommet. All wiring holes shall be provided with black plastic grommets of sufficient size to fit snugly into the wiring holes. The grommet shall have a flange around the top which rests on top of the visible surface. The grommet shall be capable of snapping in and out of the wiring holes without damaging the surrounding surface.

3.2.12 Painted finish.

3.2.12.1 Primer. The primer, when used, shall be compatible with the finishing enamel specified in 3.2.12.2.

3.2.12.2 Enamel. The enamel shall be of the baking type in accordance with the manufacturer's commercial product. The color shall be black, unless otherwise specified.

3.2.13 Plywood. The softwood plywood used shall be in accordance with A-B interior grade, or better, of U.S. Product Standard PS-1. Softwood plywood used shall have close grain soft or hardwood face veneers to prevent telegraphing. The hardwood plywood used shall be in accordance with sound grade, type II bond of Commercial Standard PS-51. The softwood and hardwood plywood shall be not less than 3/4 inch 5-ply, and shall be of the thickness required. The moisture content of the plywood shall not exceed 9 percent at time of plastic laminate assembly.

3.3 Construction.

3.3.1 Design. All type I, II, and III units in this specification shall be composed of an interior metal frame with plastic laminate panels attached to the frame to form the exterior. Type IV or V units shall be constructed from plastic laminate panels with special concealed KD fasteners used for assembly. The design of the furniture shall be as shown in the figures referenced in the applicable detail paragraphs.

3.3.2 Assembly of metal parts. The assembly of metal parts shall be by welding or brazing as specified for maximum strength at each joint. Jigs shall be used to insure proper alignment of parts during welding. Welding and brazing shall be sound to insure rigid units that have sufficient strength to withstand heavy-duty usage, prohibit the loosening of any part; or shall not cause any other defect which might affect the serviceability of the units or the safety of the user. All overlapping parts which are to be welded to each other shall be offset to provide maximum welding area, strength, and rigidity to the welded assembly.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.3 Brazing. Where brazing is permitted, the following conditions shall apply: When brazing is used to join component parts in lieu of welding, the brazing method shall include the use of a nickel-bronze rod conforming to type I, class RCuZn - D of QQ-R-571, and shall have a tensile strength of 70,000 p.s.i. When brazing is used simply as a filler or a filler to hide a seam or joint that has been securely joined by welding, the brazing method may include the use of another rod having adequate tensile strength to assure the brazed area will not crack or fracture under shipping, moving, or in-use conditions.

3.3.4 Dimensions. The overall dimensions of the items covered herein shall be as specified in 1.2.

3.3.4.1 Tolerances. Standard commercial manufacturing tolerances for the types of items covered by this specification are permitted except as specified below, and unless otherwise specified elsewhere herein:

Overall width, depth, and height of the units - plus or minus 1/8 inch.
Particleboard thickness - plus or minus 1/64 inch.
All flush conditions specified - plus 0, minus 1/16 inch.

3.3.5 Plastic laminate panels. All panels used in the construction of this furniture shall consist of a core material of minimum 3/4 inch particleboard as specified in 3.2.3 with the exception of the overchest doors and drawer fronts. The core of the overchest doors shall be hardboard as specified in 3.2.2 and the core of the drawer fronts shall be plywood specified in 3.2.13. The core material shall have a sheet of plastic laminate specified in 3.2.4 securely adhered to each surface. When used, the direction of the wood grain plastic laminate shall run in the longest direction of the panel. Unless otherwise specified, all edges of plastic laminate panels exposed to normal exterior view shall have "tee" molding specified in 3.2.10 securely attached to the edge. All edges not covered by a frame member, "tee" molding, or permanently attached upon assembly to an adjoining panel shall be finished with black enamel. The specific type, color, and pattern of the plastic laminate on each panel shall be as specified from table I. When a color option is available, the color shall be as specified by the contracting officer (see 6.2).

TABLE I. Color and pattern of plastic laminate used on the specific component panels

Component	Exposed Surface	Color and Pattern	Unexposed Surface	Color and Pattern
Tops of chest units (except overchest)	Type I	Black	Type V	-
Sides of chest units	Type II	English Oak	Type V	-
Sliding doors on overchest	Type II	Gold	Type V	-
Drawer fronts and doors for Type II and III units	Type II (Sub Class "P")	Gold, Red, Blue, English Oak, as specified by contracting officer.	Type V	-
Drop lid	Type II	Gold, Red, Blue, English Oak, as specified by contracting officer.	Type II	Black

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE I. Color and pattern of plastic laminate used on the specific component panels (con.)

Component	Exposed Surface	Color and Pattern	Unexposed Surface	Color and Pattern
Bottoms of chest units	Type V	-	Type V	-
Back of chest unit	Type II	English Oak	Type V	-
Stereo shelf, grooming unit shelf, and vertical divider	Type V	-	Type V	-
Sides of bookcase units	Type II	English Oak	Type II	English Oak
Top and bottom of shelf units	Type II	Black	Type V	-
Shelves	Type II	Black	Type II	Black
Back of bookcase units	Type II	English Oak	Type II	English Oak
Facia	Type II	Gold	Type V	-
Overchest top	Type V	-	Type V	-
Back of grooming unit top	Type II	White	Type II	English Oak
Dividers of grooming unit top (see 3.9.2.3)	Type II	English Oak	Type II	White

3.3.6 Steel formations in frame. The steel frame used in the construction of this furniture shall be composed of 16 (0.0598) gage steel. The framing members used on the KD units shall be composed entirely of angles 3/4 inches by 3/4 inches. The unitized welded frame shall be composed of a combination of steel angles and tubing. The steel angles shall be 3/4 inches by 3/4 inches and the tubing shall be 3/8 inches by 5/8 inches and 3/4 inches by 3/4 inches. The configuration and location of the steel formations shall be as specified in the detailed paragraphs and figures. All frame members shall be finished in black enamel specified in 3.4.

3.3.7 Type I, class 1 and 2 - general.

3.3.7.1 Drawers. The drawers shall be as specified in 3.3.7.1.1 or 3.3.7.1.2 and conform to any additional requirements in 3.3.8.1.1.

3.3.7.1.1 Plastic drawers. The drawers used in the chest pieces shall be composed of a drawer frame section, drawer bottom, and drawer front. The drawer frame section composed of the four sides of the drawer shall be formed from one continuous piece of extruded double-walled hollow construction PVC. The four corners shall be reinforced by interlocking corner elements. The corners shall be glued neatly, closed, and square. The female portion of the drawer guide shall be formed into the sides of the drawer frame section at the time of extrusion. The inner sides of the drawer frame shall be grooved to accept a drawer bottom composed of 1/8 inch hardboard as specified in 3.7.1. The inside clear height of the drawer frame section shall be a minimum of 5 inches and the inside clear depth shall be a minimum of 15-3/4 inches. The width of the drawer frame section shall be sufficient for the drawers to operate on the drawer guides of the frame and meet all requirements specified in 3.3.8.1.1. The front portion of the drawer frame section shall have a drawer front securely attached to it by means of sheet metal screws. The drawer fronts shall be plastic laminated panels as specified in 3.3.5. The top face of the drawer front shall have a radius as shown in figure 1, and the bottom inside edge of the front shall be routed to form a full length drawer pull as shown in the figure. It shall be smooth to the touch when finished.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.7.1.2 Metal drawer. The body of the drawer shall be constructed from 20-gage steel specified in 3.2.1. The two sides and bottom shall be formed from one piece of steel. The steel shall be of sufficient size so that 90° inward flanges are formed on both ends of the sides and bottom to allow for the attachment of the drawer back and front. The flanges on the sides and bottom shall not interfere with one another. The top edge of the sides shall have a 1/8 inch beaded edge. The drawer back shall be securely spotwelded to the inside of the flanges on the sides and bottom. The top edge of the drawer back shall have a 1/8 inch beaded edge or may have 3/4 inch flat fold. The drawer front shall be attached to the front flanges of the sides and bottom by means of sheet metal screws. The drawer front shall be as specified in 3.3.7.1.1. The female portion of the drawer suspension shall be welded to either side of the drawer and be designed to operate smoothly and efficiently on the male portion of the suspension specified in 3.3.8.1.1. The drawer body shall be of sufficient width to allow the drawer to operate smoothly and without binding on the specified suspension. The inside clear height of the drawer body shall be a minimum of 5 inches and the inside clear depth shall be a minimum of 15-3/4 inches. Plastic glides shall be used to prevent any metal-to-metal contact between the members of the suspension. Two formed reinforcing members shall be welded to the bottom of the drawer. The two members shall be welded approximately 1/3 the distance from each side and the length shall be great enough to come within 1/4 inch of the drawer front and back. The bottom of the drawer shall be sprayed with a sound deadening material to within approximately 1-1/2 inch of each edge and reinforcing member. All metal parts of the drawer shall be finished as specified in 3.4.

3.3.7.2 Base. The base shall be of sufficient length to be flush with the sides of the units. The base shall inset the front of the units not more than 2 inches, and the rear of the base shall be inset not more than 1-1/4 inch. The base shall be formed from four 18-gage steel channels. The width of the front and rear channels shall be a minimum of 3 inches. The side channels shall be of sufficient width so as to fit snugly into the ends of the front and rear channels, and shall be securely welded together. The top leg of the channel formation shall be a minimum 1-3/8 inch and the bottom leg shall be a minimum of 1 inch. A 14-gage steel gusset shall be securely welded to each corner of the bottom of the base. The two front gussets shall be designed to accept the adjustable glides specified in 3.2.5.6. The two rear gussets shall be embossed approximately 7/16 inch deep with a 1 inch diameter surface at the bottom of the embossment to serve as the rear glides. A 1-1/2 inch diameter wiring hole shall be provided in the center of the rear channel of the base for the stereo cabinet and grooming unit base. The wiring hole shall be provided with a grommet specified in 3.2.11. The base shall be finished in black enamel as specified in 3.4.

3.3.8 Type I, II, and III - detail.

3.3.8.1 Type I and II - welded frame. The type I and II units shall be of the dimensions specified in 3.3.4 and shall consist of plastic laminate panels specified in 3.3.5, a unitized welded frame composed of steel formations in 3.3.6, and a base in 3.3.7.2. All type I and II units shall have the laminated panels and doors or drawers located as follows. The surface of the back panel shall be flush with the edges of the end panels and top. The surface of the end panels shall be flush with the edge of the top. The surface of the drawer fronts or doors shall be flush with each other and with the edge of the end panels and top when closed. The bottom edge of the bottom drawer front or door shall be flush with the bottom surface of the bottom panel. The bottom panel shall not be exposed to normal exterior view. The bottom of the panel shall be flush with the edges of the end panels, back, and bottom drawer fronts or doors.

3.3.8.1.1 Five-drawer chest and six-drawer chest (type I, style A and B). The basic design of the five-drawer chest shall be as shown in figure 2A and the six-drawer as shown in figure 3A. The steel formations shall be located and welded as shown in figure 2B and 3B to form the frame. All angles shall overlap where shown in the figure. All overlapping angles shall be offset as shown in the figures to provide greater weld area and a flat surface for attaching laminated panels to the frame. The front to rear 3/8 inch by 5/8 inch horizontal tubing shown in the figure shall form the male portion of the drawer suspensions as well as providing rigidity to the frame. The left and right members of the suspensions shall be located accurately vertically to each

Source: https://assist.dla.mil -- Downloaded: 20260-26T11:41Z
Check the source to verify that this is the current version before use.

other to provide smooth operation of the drawers. In addition, the frame shall be of sufficient size to provide the overall dimensions of the chests and to accommodate five drawers for the style A unit and six drawers for the style B unit as specified in 3.3.7.1. The width between the drawer suspensions shall be such that the drawers operate without binding, interference with one another, or excessive play. Each drawer shall be provided with a stop on each side of the drawer that will prevent the drawer from being accidentally removed when in use. The stop shall be capable of being released for the removal of the drawer without the use of any tools. The gap between the drawer fronts and end panels shall not exceed 1/16 inch. The gap between drawers in the six-drawer chest shall not exceed 1/8 inch. Whatever gap exists, the gap shall be maintained for the entire vertical line of drawers. Screw holes shall be provided in the frame members to accept the attachment of the laminated panels. The panels shall be attached to the frame by means of sheet metal screws. Sufficient screws shall be used to provide secure attachment of the panels. A minimum of four holes shall be drilled (two on each side) in the rear of the top of six-drawer chest which shall match similar holes provided with threaded metal inserts in the shelving units. Bolts shall be provided so that the shelving units may be attached to the tops through the holes. Plastic caps shall be provided which will completely cover the bolt holes in the top when the shelving units are not attached to the top. The base specified in 3.3.7.2 shall be securely attached to the bottom panel.

3.3.8.1.2 Stereo cabinet - (type II). The basic design of the stereo cabinet shall be as shown in figure 4A. The steel formations shall be located and welded as shown in figure 4B to form the frame. All angles shall overlap where shown in the figure. All overlapping angles shall be offset as shown in the figure to provide greater weld area and a flat surface for attaching laminated panels to the frame. The cabinet shall have a roll-out shelf. Steel angles, one on the left and one on the right side of the frame, shall be welded to the center of the front and rear vertical uprights of the frame to serve as the support for the stereo shelf. The angles shall also be attached to the end panel. The width of the stereo shelf and the positioning of the slides shall be such that the shelf can be extended to its full length when the doors are opened 90 degrees. The shelf support angles shall be located accurate vertically to each other and shall be level to provide for proper operation of the stereo shelf. A suspension specified in 3.2.6 shall be attached to each shelf support angle and shall be used to support the shelf. The shelf shall be securely attached to the suspension so that there is no disengagement of the shelf from the suspension. The front edge of the shelf shall have "tee" molding specified in 3.2.10. Each cabinet door shall have two hinges specified in 3.2.5.2.1 and a door latch and strike specified in 3.2.5.5. The door latch shall be attached to the bottom surface of the top. The latch and strike shall be aligned at the factory so that the latch may operate at maximum efficiency as required in 3.2.5.5. The hinges may be welded to the frame or attached directly to the end panels. The door edges shall be routed to accept the hinges so that the gap between the door and edge of the end panel shall not exceed 1/8 inch. The gap between the two doors and top shall not exceed 1/8 inch. The gap around the doors shall be uniform. All edges except the hinged edge of the door shall have "tee" molding as specified in 3.2.10. The frame shall be punched to accept the attachment of the laminated panels. The panels shall be attached to the frame by means of sheet metal screws. Sufficient screws shall be used to provide secure attachment of the panels. The base specified in 3.3.7.2 shall be securely attached to the bottom panel. A 1-1/2 inch diameter wiring hole shall be provided in the right rear of the top and the bottom panel. The wiring hole in the top shall align with the wiring holes in the shelving units. Grommets specified in 3.2.11 shall be provided for each wiring hole. A black plastic cap shall be provided which will completely cover the wiring hole in the top when a shelving unit is not used on the stereo unit. A minimum of four holes shall be drilled (two on each side) in the rear of the top which shall align on center with similar holes provided with threaded metal inserts in the shelving units. Bolts shall be provided so that the shelving units may be attached to the tops through the holes. Black plastic caps shall be provided which will completely cover the bolt holes in the top when the shelving units are not in use.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the currentversion before use.

3.3.8.2 Type III (grooming unit base) - KD frame. The grooming unit base shall be of the dimensions specified in 3.3.4 and shall consist of plastic laminate panels specified in 3.3.5, steel formations specified in 3.3.6 attached to the panels to form the KD frame, and a base specified in 3.3.7.2. The basic design of the unit shall be as shown in figure 5A. The unit shall be shipped knocked down. The steel angles shall be punched for attachment to the panels. One flange of each angle forming the interior frame shall be shipped, attached by sheet metal screws, to the various panels. The specific panels and location of the angles attached to the panels at the factory shall be as shown in figure 5B. The panels which are to be attached to the frame in the field upon assembly shall have lead holes drilled in the panels to match the holes punched in the metal frame. The unit shall be assembled as shown in figure 5B. The left section of the unit shall be enclosed by a door. The door edge shall be routered to accept two hinges specified in 3.2.5.2.1. The rout shall be deep enough so that the gap between the end panel and door edge shall not exceed 1/16 inch and shall be uniform. Lead holes shall be drilled in the left end panel and the edge of the door for ease of assembly of door to end panel. A door latch and strike specified in 3.2.5.5 shall be provided for attachment to the bottom surface of the top and to the door. Lead hole shall be bored in the top and door for the attachment of the latch and strike. The door shall have "tee" molding specified in 3.2.10 on all edges with the exception of the edge to which the hinges attach. The door shall be of the proper size so that the front surface of the door is flush with the edges of the side, top, vertical divider, and bottom. The gap between the door edge, top, bottom, and vertical divider shall not exceed 1/8 inch and shall be uniform. The section of the unit enclosed by the door shall have an adjustable shelf supported by four shelf rests specified in 3.2.5.7. Holes shall be predrilled in the end panel and vertical divider to accept the shelf rests. There shall be three sets of holes, one set centered vertically and a set located 6 inches above and a set 6 inches below the centered set. The shelf shall be a minimum of 15 inches deep, located and notched-out at the rear to allow clearance of the frame as shown in figure 5B. The front edge of the shelf shall have "tee" molding specified in 3.2.10. The vertical divider shall be located and notched-out to allow clearance of the frame as shown in figure 5B. A minimum of four holes shall be drilled (two on each side) at the rear of the top which shall align on center with similar holes provided with threaded metal inserts in the grooming unit top. Bolts shall be provided so that the shelving units may be attached to the tops through the holes. A 1-1/2 inch diameter wiring hole shall be provided in the right rear of the bottom panel. A grommet specified in 3.2.11 shall be provided for the wiring hole. The base specified in 3.3.7.2 shall be securely attached to the bottom panel by sheet metal screws. Necessary fasteners shall be provided for assembly. All lead holes that are drilled shall not penetrate the exterior surface of the panels. No special tools shall be required for assembly.

3.3.9 Type IV and V - detail. The class 3 units shall be of the dimensions specified in 3.3.4 and shall consist of the plastic laminate panels specified in 3.3.5. The units shall be shipped knockdown. The units shall be assembled by use of the KD fasteners specified in 3.2.7 and meet the assembly requirements in 4.3.2.2.

3.3.9.1 Overchest (type IV). The basic design of the overchest shall be as shown in figure 6A. The edge of the bottom panel and the bottom of the top panel shall be provided with properly aligned sliding door tracks specified in 3.2.6. The sliding doors specified in 3.3.5 shall each be provided with a sliding door pull specified in 3.2.5.1. The center of the pull shall be located approximately 1-1/2 inches from the vertical edge of the door which is in contact with the side of the overchest when closed and 3 inches above the bottom edge of the door. The doors shall be of sufficient width so that each door covers approximately 1/2 of the front opening. The height of the door shall be sufficient for the doors to operate in the tracks without binding nor without falling from the tracks. The bottom of the bottom panel shall be bored to receive four metal inserts with internal and external threads (two located in the right 1/3 and two in the left 1/3). The bored holes shall not penetrate the top surface of the bottom panel. The four threaded inserts shall align on center with four holes in the top of the shelfing units and specified base units so that the chest may be attached to the top of the shelving units or base units and be so positioned that the respective panels of the two units are flush with each other. The overchest shall provide for stacking one on top of the other. Stacking shall be accomplished by attaching four bolts through the top panel and into the four threaded inserts in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

bottom panel of the top unit. The holes in the top panel shall be prebored and aligned with the threaded inserts so that when units are stacked, the corresponding panels of two units are flush with each other. Black plastic caps shall be provided which will completely cover the bolt holes in the top panel. Upon assembly, the panels shall be assembled and located to each other as shown in figure 6B. The number and approximate location of the KD fasteners shall be as shown in figure 6B. It should be noted from figure 6B that the four router pockets in the bottom panel require the special entrance rout specified in 3.2.7. After assembly, four No. 10 minimum Phillips flathead screws, two through the back panel into the bottom panel and two through the top into the back panel shall lock the entire assembly together as shown in figure 6B. Lead holes shall be bored in the panels for the screws.

3.3.9.2 Type V shelving units. The bottom of the bottom shelf on all type V units shall be bored to receive four metal inserts with internal and external threads. The bored holes shall not penetrate the exterior face of the panels. The threaded inserts shall align on center with similar prebored holes in the top of the type I, style A, type II and III so that the shelving units may be securely attached to units. When units are attached to the type I, style A, type II and III, the respective panels of the two units shall be flush with each other. The top panel of all type V units shall have four prebored holes which shall align on center with the four threaded inserts in the bottom panel of the overchest specified in 3.3.9.1 so that the overchest may be attached to the top of the type V units By use of bolts. The holes shall be positioned so that the alignment in 3.3.9.1 is accomplished. Black plastic caps shall be provided which will completely cover the bolt holes in the top panels when the overchest is not attached. Both the bottom panel and fixed shelf of the style C and D units shall be provided with a 1-1/2 inch diameter wiring hole. The two wiring holes shall be located in the right rear of the shelf and shall align with the wiring hole located in the stereo cabinet specified in 3.3.8.1.2. Grommets specified in 3.2.11 shall be provided for each wiring hole. When the wiring holes are not in use, black plastic caps shall be provided which will completely cover the holes.

3.3.9.2.1 Open shelf bookcase (type V, style C). The basic design of the bookcase shall be as shown in figure 7A. The bookcase shall have a fixed shelf located above the bottom shelf. The distance between the bottom shelf and the fixed shelf shall provide for 13-1/4 inches of clear height. The fixed shelf shall have a means of being locked to the back panel by concealed fasteners. Four rows of holes (two rows on each inside surface of the side) shall be bored in sides for acceptance of the shelf rests specified in 3.2.5.7. The first set of holes shall be located 6 inches above the fixed shelf and four sets of holes 6 inches between sets shall be located above the first set. The bored holes shall not penetrate the exterior surface of the sides. Two adjustable shelves with rests shall be provided with each unit. Upon assembly, the panels shall be assembled and located to each other as shown in figure 7B. The number and approximate location of the KD fasteners shall be as shown in figure 7B. It should be noted from figure 7B that the eight router pockets in the bottom and fixed shelves require the special entrance rout specified in 3.2.7. After assembly, two no. 10 Phillips flathead minimum screws through the top into the back panel shall lock the top. Two no. 10 Phillips flathead statuary bronze screws through the back into the bottom shelf shall lock the bottom into place. Lead holes shall be bored in the panels for the screws. The holes shall be counterbored so that the screws are flush.

3.3.9.2.2 Droplid bookcase (type V, style D). The basic design of the bookcase shall be as shown in figure 8A. The bookcase shall be as specified in 3.3.9.2.1 with the following exception. The opening between the bottom and top shelf shall be enclosed by a droplid. The droplid shall be of sufficient size so that the top edge shall be flush with the top surface of the fixed shelf. The surface of the lid shall be flush with the edges of the sides and bottom shelf. This requires the depth of the fixed shelf to be approximately 3/4 inches less than the corresponding shelves in 3.3.9.2.1. The front edge of the fixed shelf and all edges of the droplid except the hinged edge shall have "tee" molding specified in 3.2.10. The droplid and the bottom shelf shall have hinges specified in 3.2.5.2.2. The drop lid and sides of the bookcase shall be provided with the stays specified in 3.2.5.3. A magnetic catch specified in 3.2.5.4 shall be attached and properly aligned to the bottom of the fixed shelf. The location and number of the KD fasteners shall be as shown in figure 8B. All provisions and notes applying to figure 8B in 3.3.9.2.1 shall also apply to figure 8B.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

3.3.9.2.3 Grooming unit top (type V, style E). The basic design of the grooming unit top shall be as shown in figure 9A. The grooming unit shall have two vertical dividers. Each divider shall be located from each end panel so that there is 10 inches of clear space between the side and divider. Two rows of holes on the interior surface of the sides and the surface nearest the side of each vertical divider shall be bored for the acceptance of the shelf rests specified in 3.2.5.7. Six sets of holes shall be provided spaced 6 inches apart beginning 6 inches above the bottom shelf. The bored holes shall not penetrate the opposite sides of the panels. Four adjustable shelves shall be provided. The white surface of the back panel specified in 3.2.5 shall be located to the interior of the unit. The white sides of the vertical dividers specified in 3.2.5 shall be located toward the center section of the unit. The center section shall have four holes prebored for the attachment of the medicine chest specified in 3.2.9. Upon assembly, the panels shall be assembled and located to each other as shown in figure 9B. The number and approximate location of the KD fasteners shall be as shown in figure 9B. It should be noted from figure 9B that the four router pockets in the bottom shelf and the two in the facia require the special entrance rout specified in 3.2.7. After assembly, seven no. 10 Phillips flathead screws (two through the top into the back, one through the top into the facia, and two through the bottom into the vertical dividers) shall lock the entire assembly together as shown in figure 9B. Lead holes shall be bored in the panels for the screws.

3.3.10 Type VI (vanity box). The basic design of the vanity box shall be as shown in figure 10A and shall be designed as an insert to be used in one of the drawers of the six-drawer chest. The vanity box shall consist of a thermoformed tray with a mirrored, hinged lid. The tray shall be fabricated from ABS plastic and the color shall be an acceptable match to General Electrics Noryl Color No. SE 100-8216. The tray shall be constructed as shown in figure 10B. The tray shall have flanges around the entire perimeter of the top of the tray as shown in 10B. The side and front flanges shall support the tray on the top edges of the drawer frame section. Dimension A shown in figure 10B shall be held to maximum so that there is a minimum of side-to-side movement of the vanity box within the drawer and so that the left and right flanges do not extend beyond the drawer edge when the tray is at its maximum side-to-side allowance. The dimensions of the lid shall be sufficient to completely cover the entire tray. The lid may be composed entirely of an acyrlic mirror or may be composed of a separate lid of the same material as the tray with an acrylic mirror securely attached to the lid. The thickness of the tray flange together with the lid assembly shall not exceed 0.50 inches. In no case shall the vanity box interfere with the operation of the drawer in the chest.

3.4 Pretreatment and finishing.

3.4.1 Painted finish.

3.4.1.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces shall be treated for painting in accordance with any method of TT-C-490.

3.4.1.2 Priming. Unless type I or type II of TT-C-490 is used, all exterior and interior surfaces treated as specified in 3.4.1.1 shall be coated with primer specified in 3.2.12.1.

3.4.1.3 Enameling. All pretreated surfaces shall be coated with enamel specified in 3.2.12.2. The finish shall be baked at a time-temperature cycle recommended by the enamel manufacturer. The total dry film thickness on all exterior surfaces shall be not less than 1.1 mils. The total dry film thickness on all interior metal surfaces shall be not less than 0.8 mils. The finish shall level out to produce smooth, uniform surfaces without runs, wrinkles, grits, areas of thin film or no film, and separation of color. A 20-gage steel test panel shall be finished as specified in this paragraph. The test panel shall be scored with a razor blade through the film to the base metal in such a manner as to produce a grid of 1/8 inch squares. A 1-inch wide piece of cellophane tape (Scotch Brand No. 600, or equal) shall be applied firmly to the grid surface (full length of panel) and then quickly pulled from the surface. The dried film shall not be removed from the panel.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:41Z
Check the source to verify that this is the current version before use.

3.5 Identification marking. Unless otherwise specified, each unit shall be permanently and inconspicuously marked in a plain and legible manner with the specification number, National Stock Number, contract number, month and year of manufacture, and the manufacturer's name or trademark so that the source of supply can be readily determined. When specified (see 6.2), identification marking shall be in accordance with MIL-STD-130. Also, the contractor may apply his standard decal or nameplate.

3.6 Assembly instruction sheet. All type III, IV, and V units shall be provided with assembly instruction sheet. The instruction sheet shall have illustrations and precise step-by-step directions as necessary for proper and easy assembly. The sheet shall be available for use and approval at the time of preproduction inspection. The instruction sheet shall be packaged with the applicable unit.

3.7 Workmanship. A high degree of craftsmanship shall be exercised to insure well-designed and manufactured units. Care shall be taken to eliminate burrs, sharp edges, or corners that may cause personal injury. Components shall be neatly and accurately trimmed and the laminate shall not be broken. The laminate shall be factory applied, providing a tight, uniform bond without wrinkles, blisters, breaks, cuts, or embedded foreign matter. Cuts or scratches (breaking of the laminate layer) will not be permitted. Surface preparation of the particleboard shall be suitable for subsequent application of the plastic laminate.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Examination and testing of the preproduction sample shall be made on a completely fabricated item for all provisions of this specification applicable to end product examination and tests, before regular production is started.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105 except as otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested, and inspected in accordance with the specified requirements of referenced specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.3.2 Inspection of end items. The lot shall be all units of the same style offered for inspection at one time. The sample shall be one completely assembled unit or one unit ready for assembly as applicable.

4.3.2.1 Visual examination. The units shall be examined for the defects specified in table II and III. The inspection level and the acceptable quality level shall be as specified in 4.3.3.

TABLE II. Classification of defects

Examine	Paragraph	Defect	Classification Major	Minor
Enamel finish	3.4	Poor adhesion; i.e., blistered checking or peeling.		
		Tacky (not dry to touch).		
		Color separation, stain, or not smooth and uniform.		
		Runs, sags, or foreign matter in coating on any exterior surface.		
		Abrasion or area of thin coating.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (Con.)

Examine	Paragraph	Defect	Classification Major	Classification Minor
Enamel finish (Con.)		Wrong color.		X
		Scratch through to base metal, or bare spots.		
		Rust under coating.	X	
Workmanship and construction (general)	3.7	Any part missing, except bolts, nuts, and lockwashers.		
		Malformed parts affecting serviceability.		
		Broken, punctured, warped, or cracked parts.		
		Sharp edge or projection that may cause injury.	X	
		Malformed, mislocated, damaged, buckled, or warped parts affecting appearance.		
		Any dent on exposed surfaces affecting appearance.		
		Bolts, nuts, and lockwashers missing.		X
		Incorrect formation or design of component preventing it from adequately performing its specified function.	X	
Droplid	3.2.5.2.2	Wrong type.	X	
Droplid stays	3.2.5.3	No friction adjustment.		
		Does not hold lid horizontally and even with shelf.		X
Magnetic catches	3.2.5.4	Not properly aligned with door strikes; wrong type.		X
Door latch and strike	3.2.5.5	Not properly aligned; not proper throw; wrong type.		X
Glides	3.2.5.6	Not adjustable without lifting units; wrong type.	X	
Sliding shelf suspensions	3.2.6	Wrong type.		
		Not capable of supporting specified load.	X	
Sliding door track	3.2.8	Number and size of tracks not as specified.	X	
"Tee" molding	3.2.10	Wrong size; buckled; dented; cracked, loose, broken, or sharp edges.	X	
Medicine chest	3.2.9	Wrong size or not as specified.	X	
Plastic laminate panels	3.3.5	Core not material of size specified.		
		Not laminate specified.		X
		Face or backing sheet missing.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (Con.)

Examine	Paragraph	Defect	Classification Major	Minor
Plastic laminate panels (Con.)		Poor adhesion; i.e., blistered, broken, or cracked.		
		Decorative laminate damaged, dented, chipped, or discolored.		
		Wrong color or grain.		
		"Tee" molding not used as specified; wrong color.		X
Steel formations in frame	3.3.6	Not size, gauge, or formation specified.	X	
Drawers	3.3.7.1	Not size specified; not constructed as specified.	X	
		Drawer front not radius specified.		
		Not pull specified.		X
Base	3.3.7.2	Not constructed as specified.	X	
Type I and II units	3.3.8.1	Proper formations not used as specified.		
		Overlapping joints not used where specified.	X	
		Welds not ground smooth.		
		Welds burnt through, cracked, fractured, or not fused.		
		Doors and drawers do not operate smoothly and properly.		
		Shelf not secured to suspension.		
		Drawer stop not as specified.		
		Panels and base not attached as specified.		
		Stereo shelf will not fully extend when doors are opened 90°.		
		Drawer and door suspensions not as specified.		
		Wiring holes and prebored holes not provided where specified.		
		Bolts, grommets, and plastic caps not provided.		X
Type III units	3.3.8.2	Frame members not attached to specified panels.		
		Door not as specified.		
		Shelf not adjustable as specified.		
		Wiring holes and prebored holes not provided where specified.		
		Bolts, grommets, and plastic caps not provided.		X
Type IV and V units	3.3.9	Sliding doors not properly aligned.		X
		Bored holes and threaded metal inserts not provided.		
		Bored holes and threaded inserts do not align with mating units.	X	
		Bolts, grommets, and plastic caps not provided.		
		Wiring holes and prebored holes not provided where specified.		X

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of defects (Con.)

Examine	Paragraph	Defect	Classification Major	Classification Minor
Type IV and V units (Con.)		Number and location of KD fasteners not as specified.	X	
		Provision not made for locking units together with screws after assembly.		
		Shelves not as specified.		
		Distance between fixed shelves not as specified.		X
		Drop lid not as specified.		
		Medicine chest not provided.	X	
Vanity box	3.3.10	Tray and lid not material specified.	X	
		Excessive side-to-side movement.		X
		Interferes with the operation of the drawer.	X	

4.3.2.2 Examination of assembly of KD units. Units unassembled for knocked-down shipment shall be selected from each inspection lot assembled and examined in accordance with the defects specified in table III. Components comprising a single unit shall be selected and assembled from each lot of 50 or less units produced to insure that the individual parts will intermember, maintain accurate alignment, and be easily assembled.

TABLE III. Visual defect of assembly

Examine	Defect
Assembly	Requires special tools for assembly.
	Not easily assembled; i.e., requires modification, excessive force.
	Holes not prebored or do not align on Type III units.
	Necessary fasteners, plastic cap and grommets, not provided for Type III units.
	Assembled units twisted, buckled, or out of square.
	KD fasteners do not properly mate.
	KD fasteners not properly setted or aligned, causing gaps between panels and improper alignment of the panels.
	Plastic laminate not secured to specified surface.
Assembly instruction	Missing, illegible, incorrect, or unclear.

4.3.2.3 Dimensional examination. Any dimension not within tolerance specified shall be classified as a defect.

4.3.2.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing, and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in Table IV. The sample unit shall be one shipping container fully prepared for delivery. The lot size shall be the number of containers in the inspection lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

TABLE IV. Preparation for delivery defects

Examine	Defect
Marking	Incorrect, illegible; of improper size, location, sequence, or method of application.
Material	Any nonconforming components; component missing, damaged, or otherwise defective affecting serviceability.
Workmanship	Inadequate application of components such as incomplete closure of shroud, inadequate security of hardware, panels and doors of contents, and padding of perimeter edges.
Contents	Not as specified.

4.3.3 Inspection levels and acceptable quality levels (AQL's). Inspection and acceptable quality levels expressed in defects per hundred units shall be as shown in table V.

TABLE V. Acceptable quality levels in accordance with MIL-STD-105

For examination in	Inspection levels	AQL's Major	AQL's Total
Table II	II	2.5	10.0
Table III	S-2	-	4.0
4.3.2.3	S-2	-	4.0
Table IV	S-2	-	4.0

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B, or C as specified (see 6.1).

5.1.1 Level A. Each unit shall be packaged as specified in the invitation for bids.

5.1.2 Level B. Each unit shall be packaged as specified in the invitation for bids.

5.1.3 Level C. Each unit shall be packaged to insure protection during shipment and safe delivery at destination.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A. Each unit shall be packed as specified in the invitation for bids.

5.2.2 Level B. Each unit shall be packed as specified in the invitation for bids.

5.2.3 Level C. Each unit, packaged as specified in 5.1, shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification or the National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.1).

5.3.1 Civil agencies. Marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military activities. Marking shall be in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:41Z
Check the source to verify that this is the current version before use.

6. NOTES


6.1 Intended use. This specification covers various items of furniture suitable for dormitory use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and style of units desired (see 1.2).
(c) When preproduction sample is not required (see 3.1).
(d) Color of plastic laminate where option exists (see 3.3.5).
(e) Identification marking required (see 3.5 and 5.3).
(f) Levels of packaging and packing (see 5.1 and 5.2).

GSA DC 76-4409


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

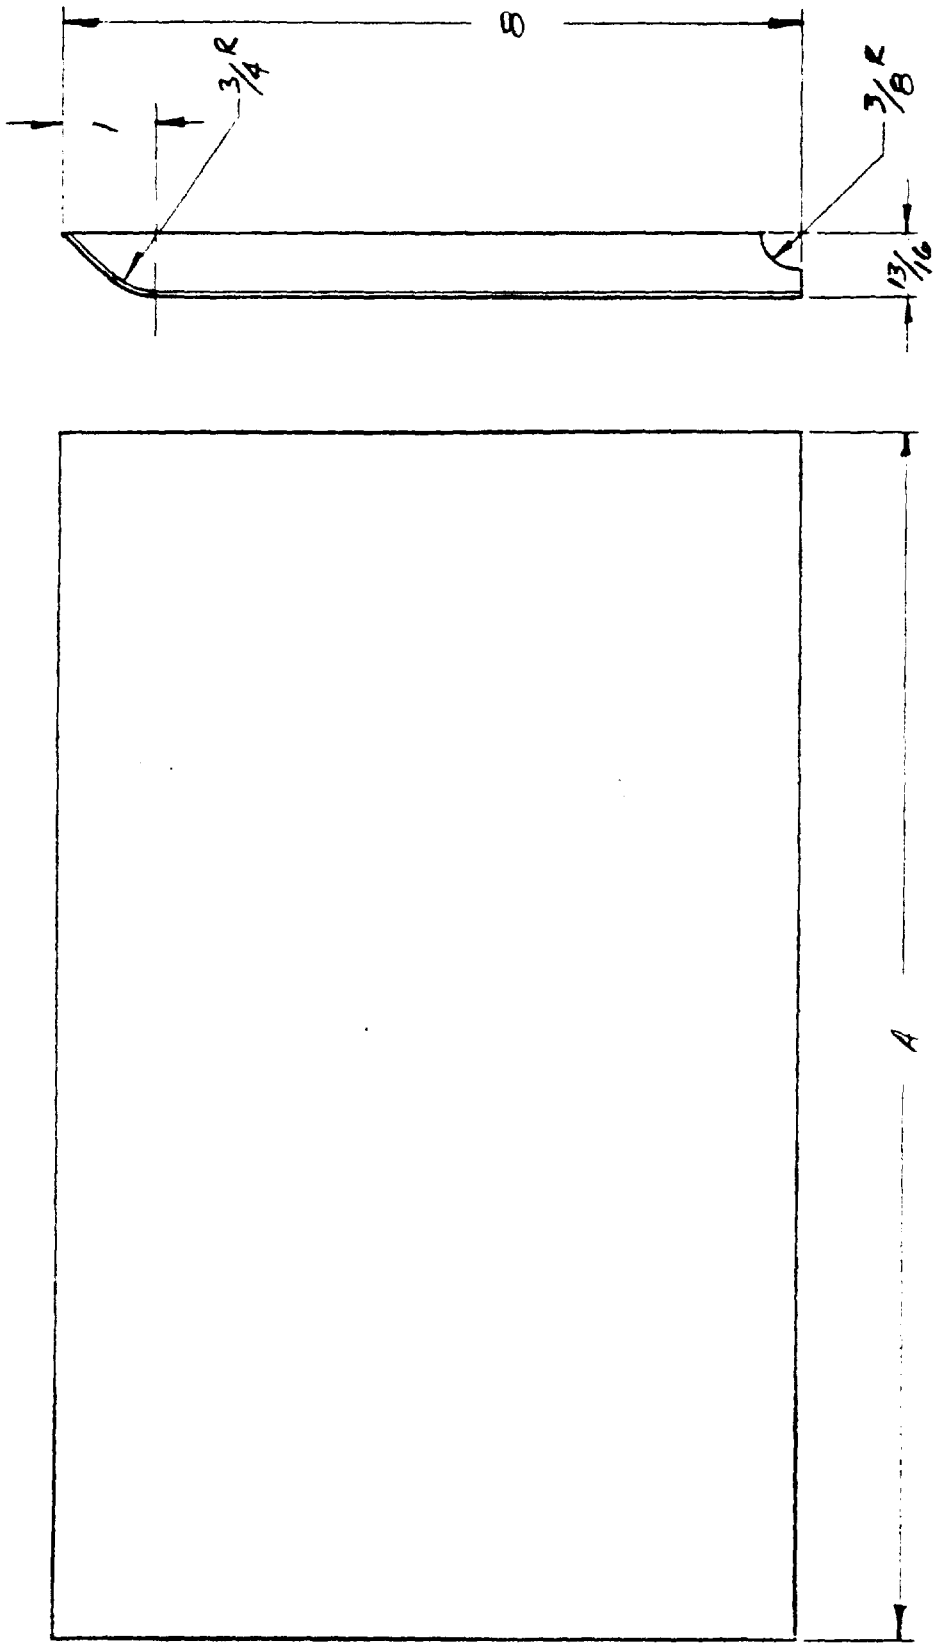

DRAWER FRONT

FIG. 1


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

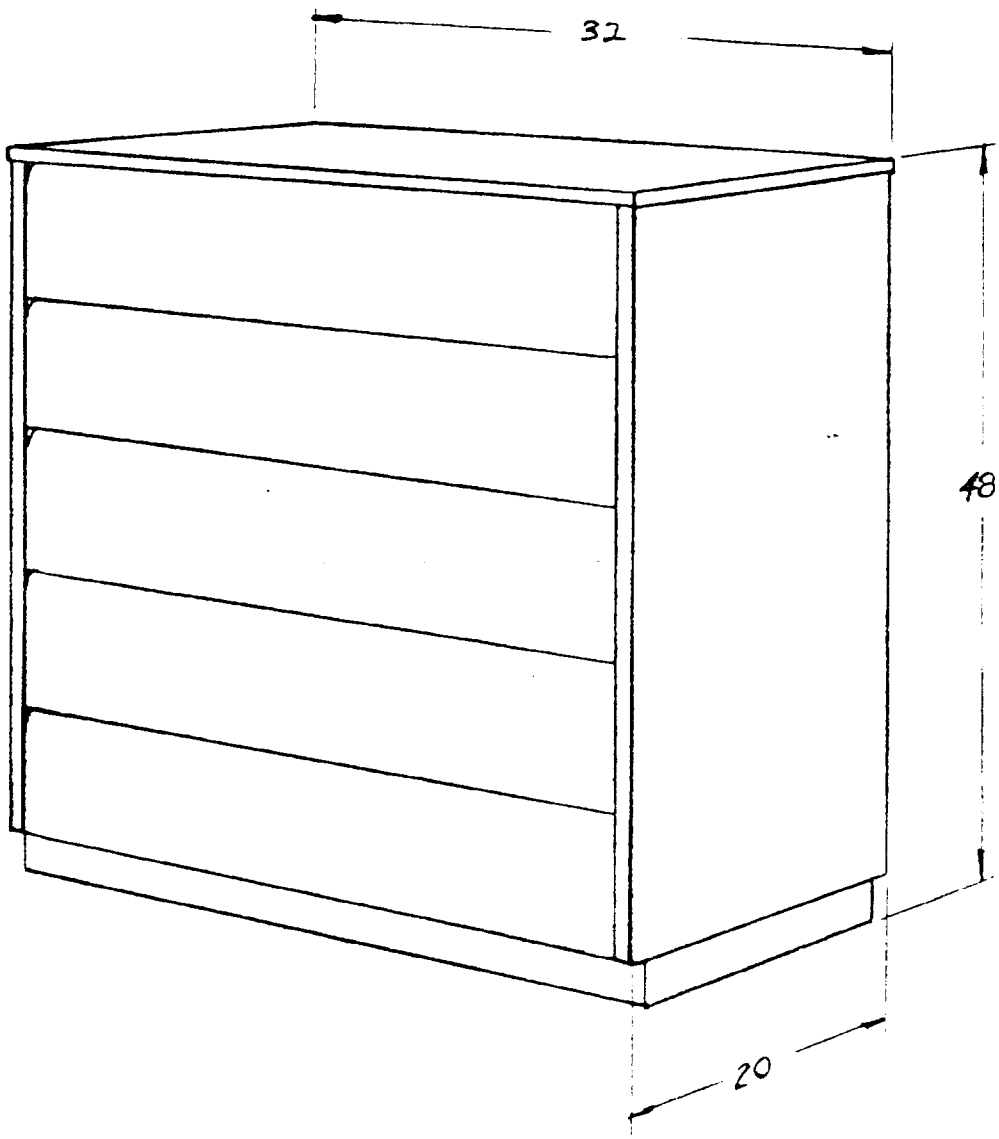

5 DRAWER CHEST

FIG 2A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

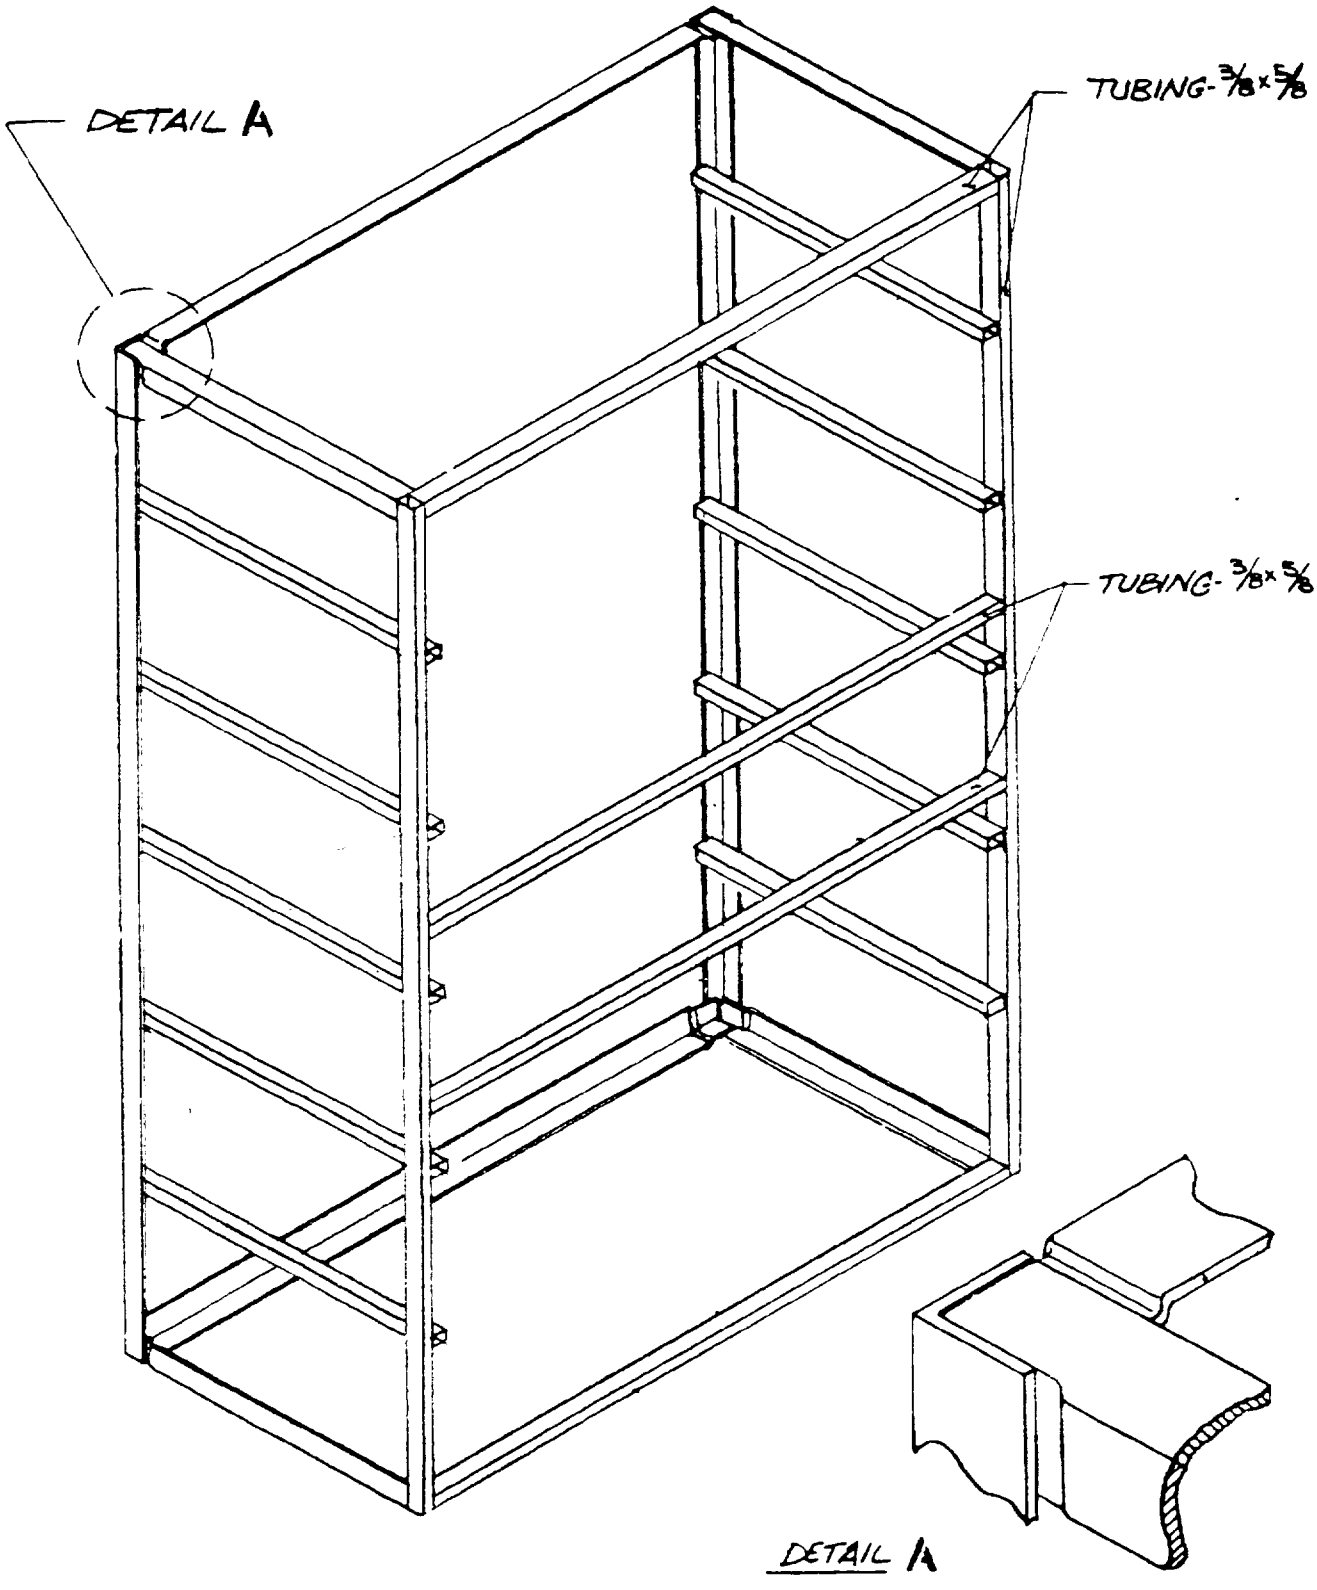

5 DRAWER CHEST (FRAME)

FIG 2B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

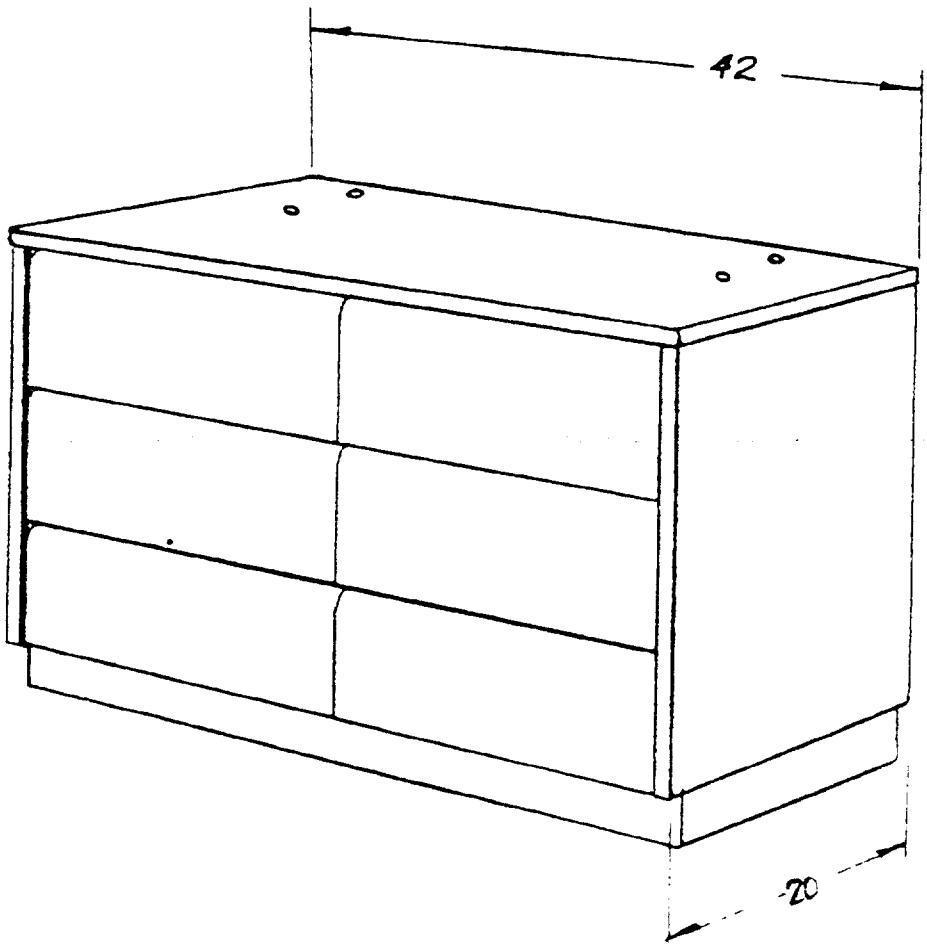

6 DRAWER CHEST

FIG 3A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

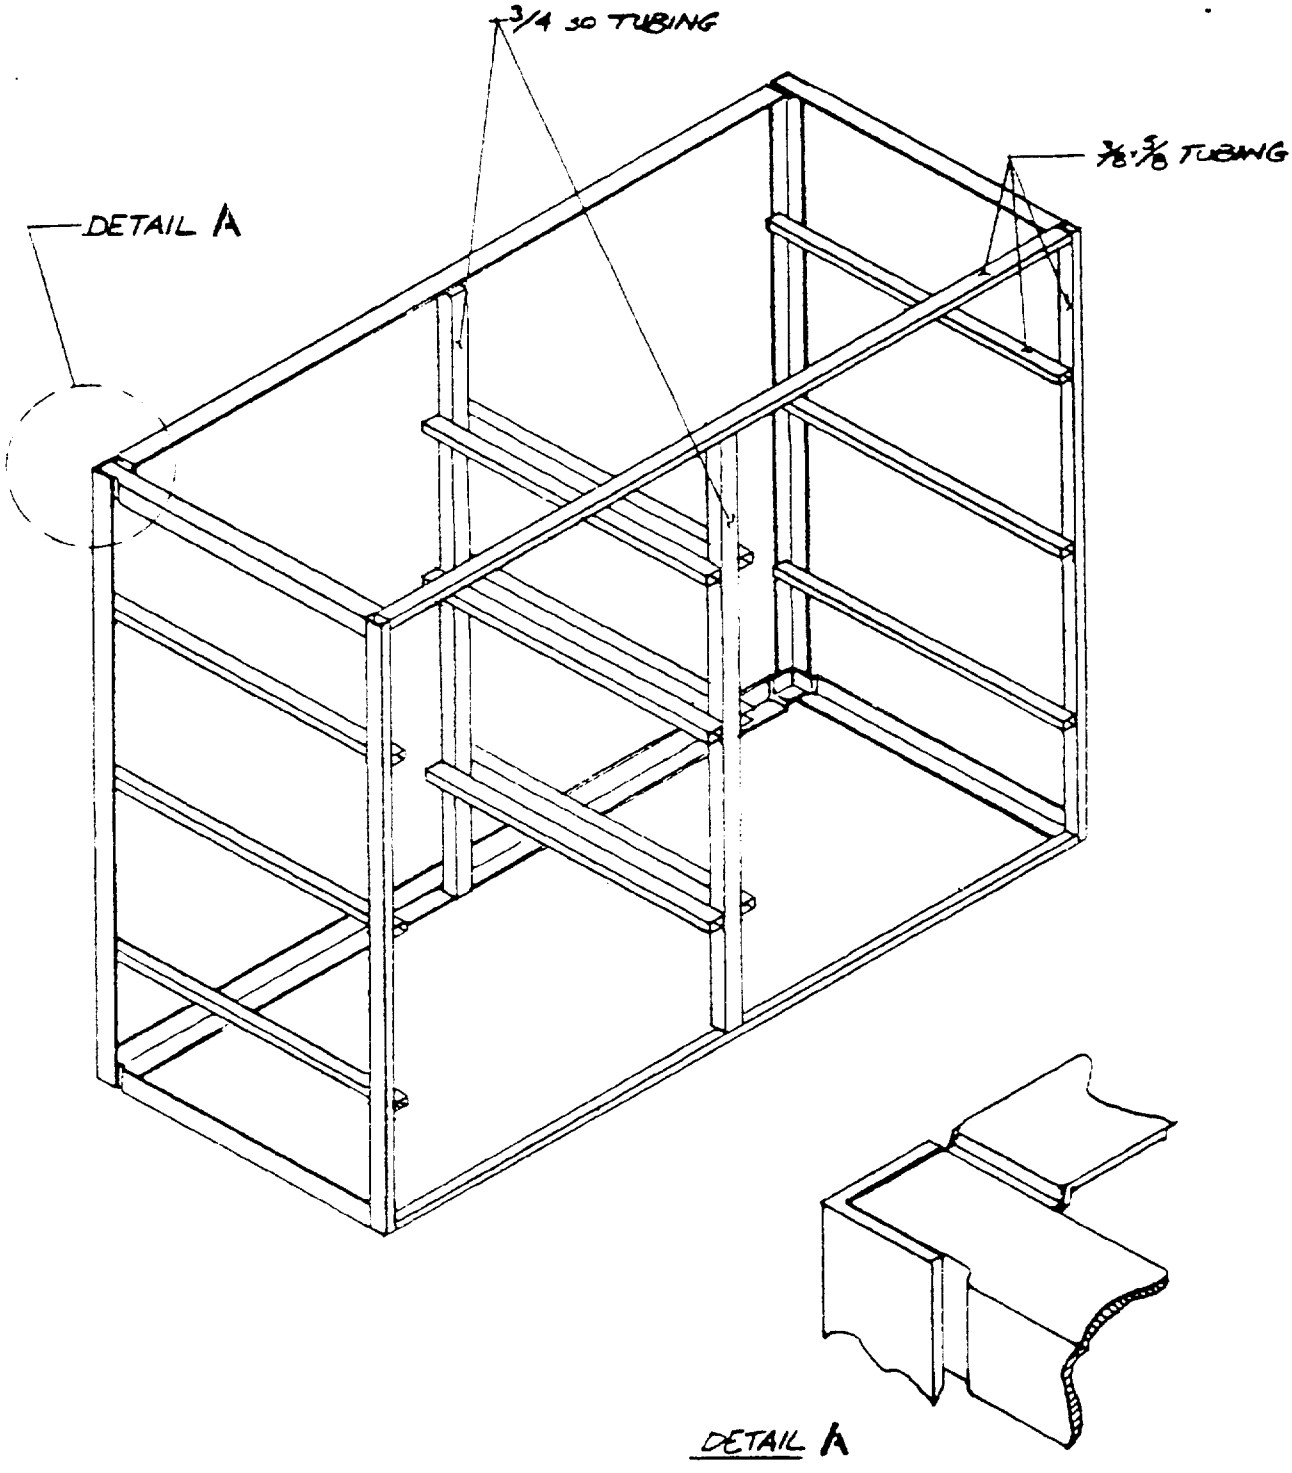

6 DRAWER CHEST (FRAME)

FIG 3B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

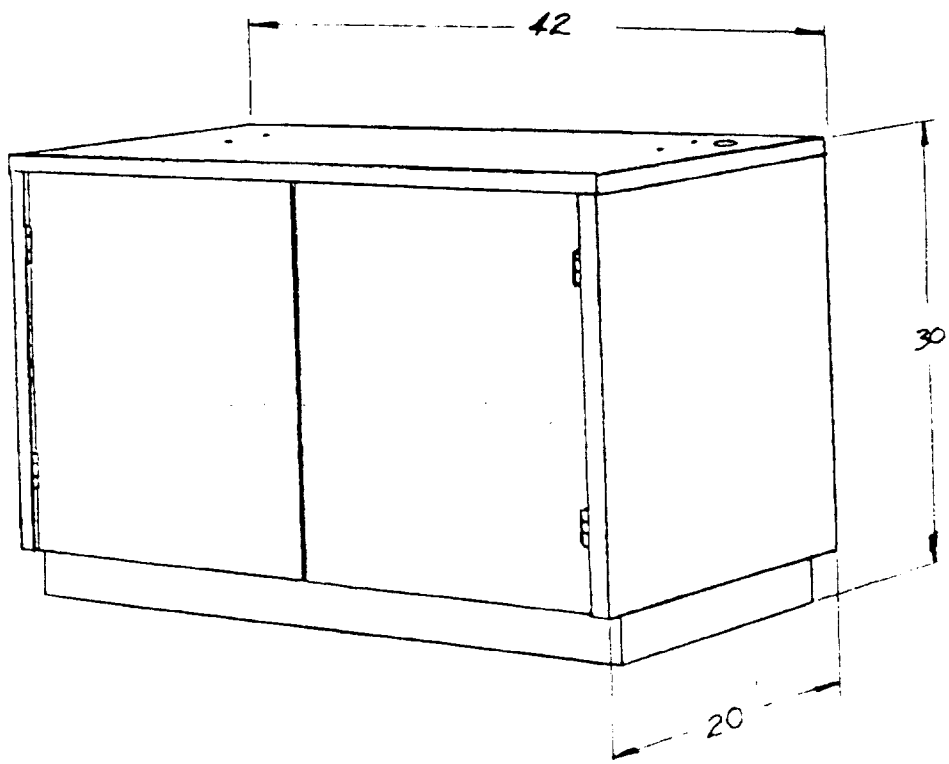

STEREO CHEST

FIG 4A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

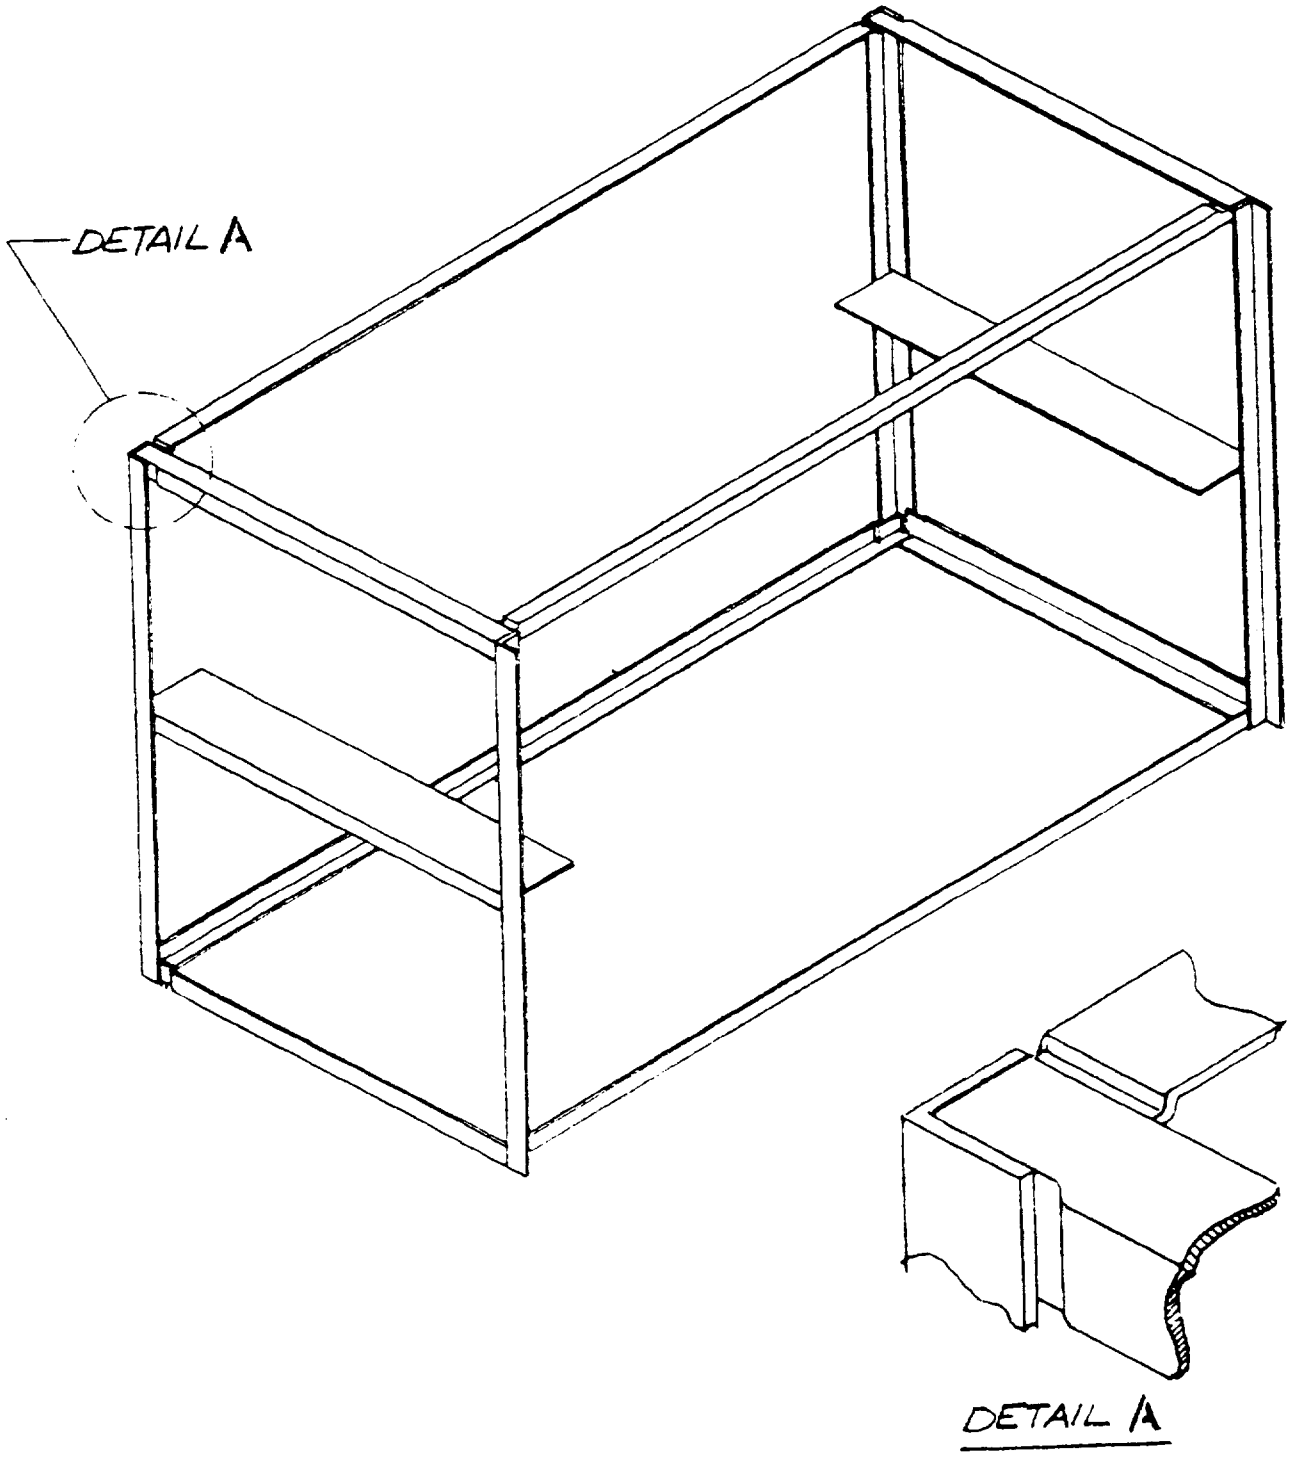

STEPED CHEST (FRAME)

FIG 4B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

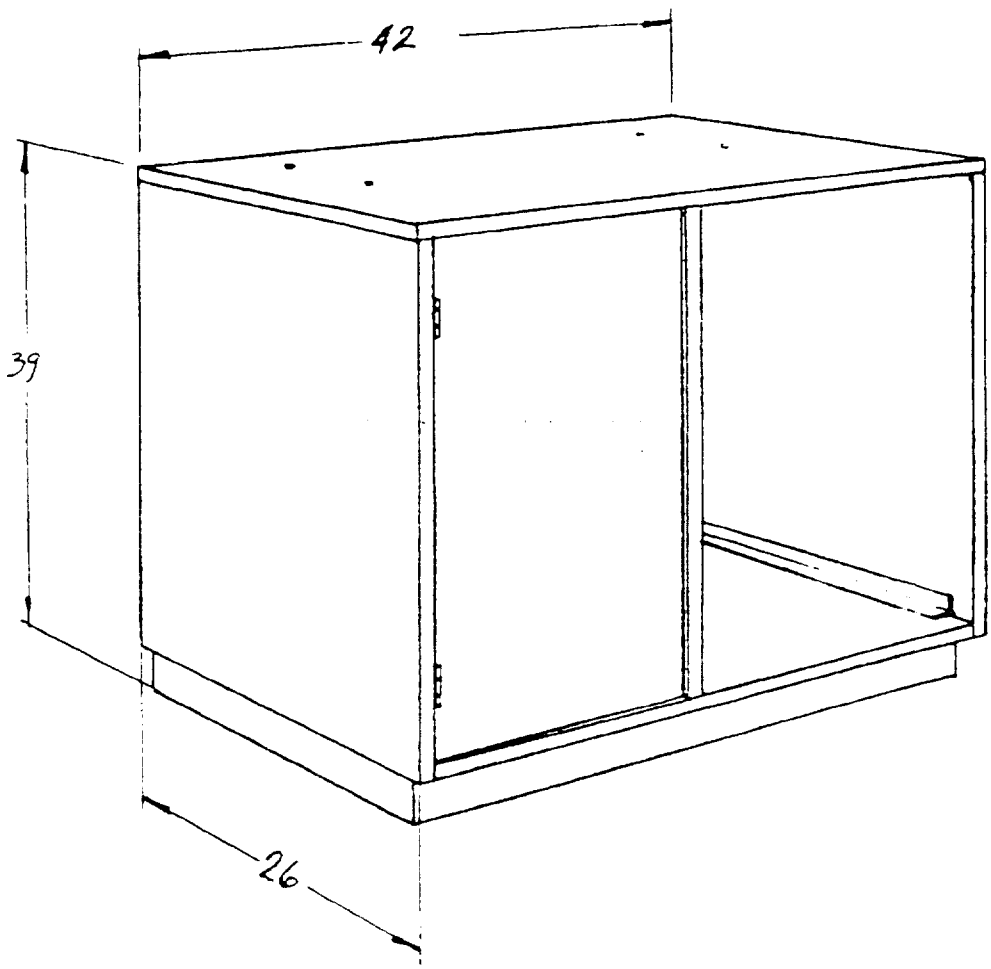

GROOMING UNIT BASE

FIG 5A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

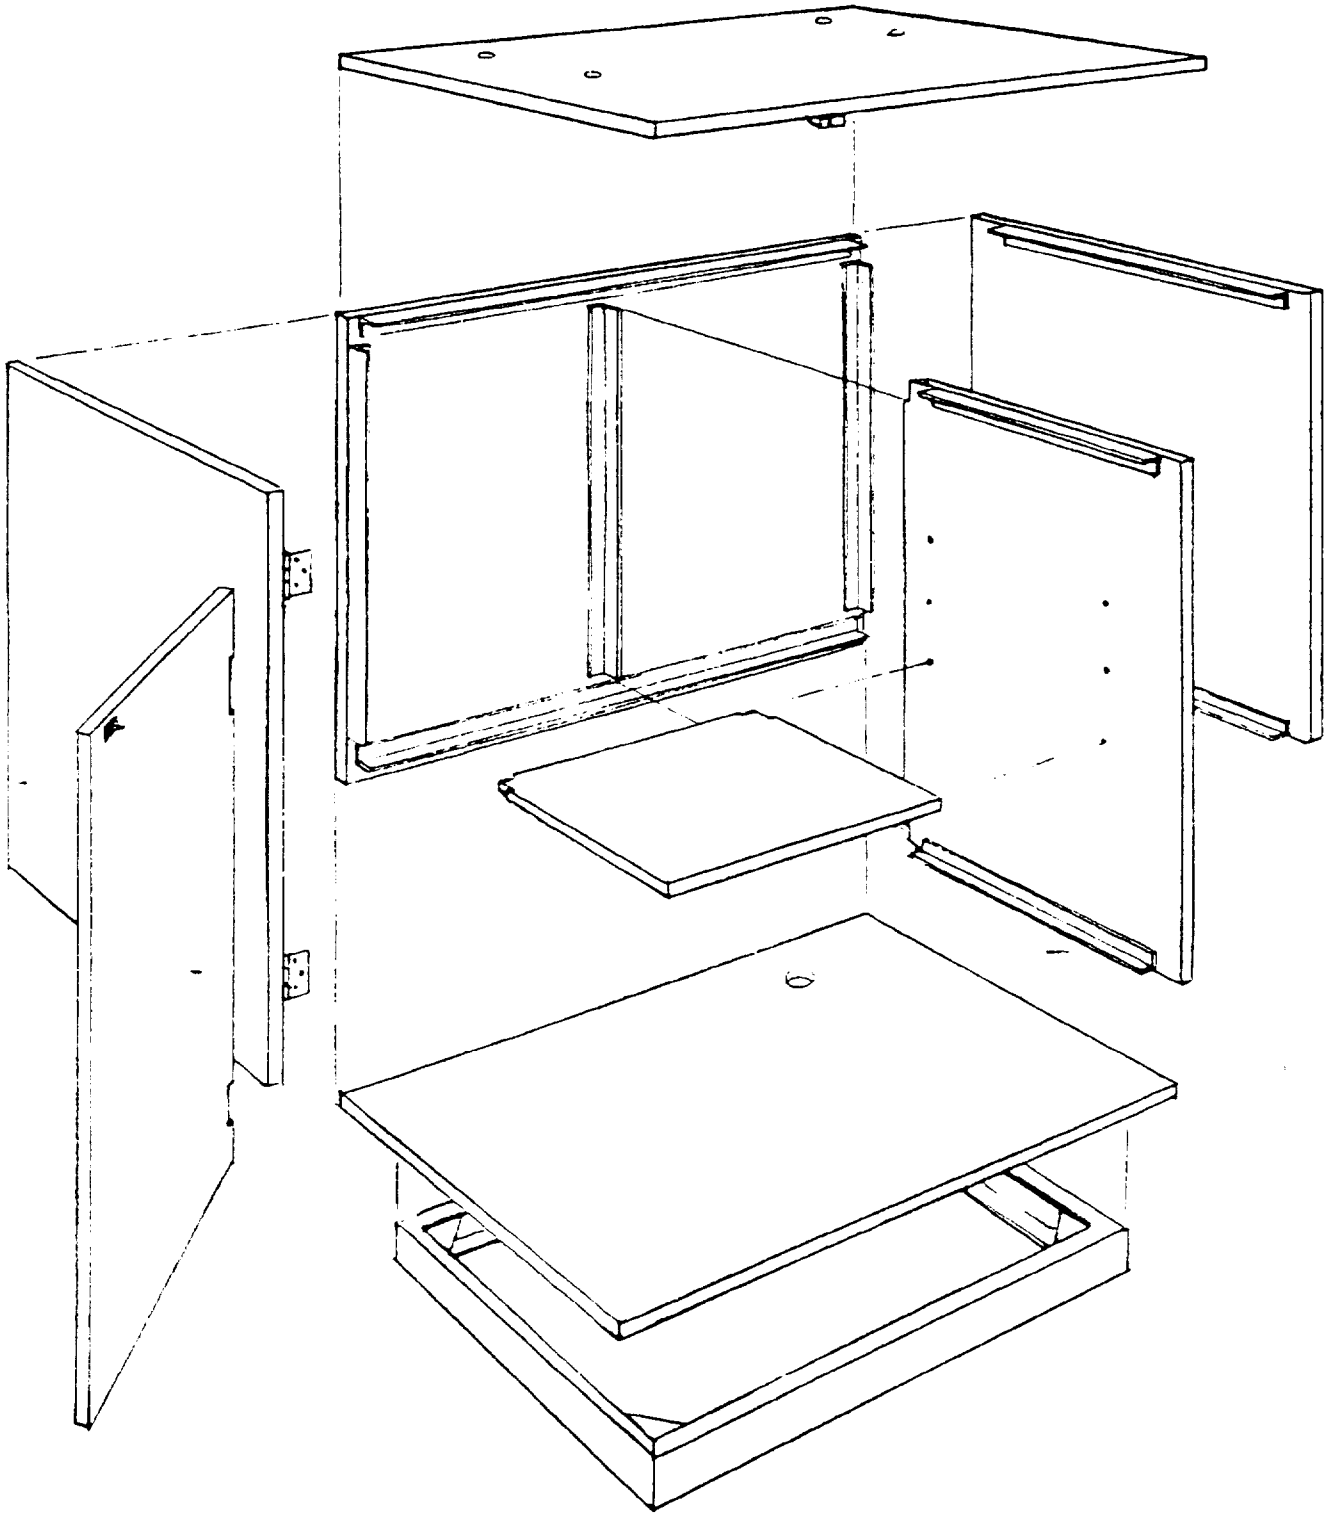

GROOMING UNIT BASE ASSY

FIG 5B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


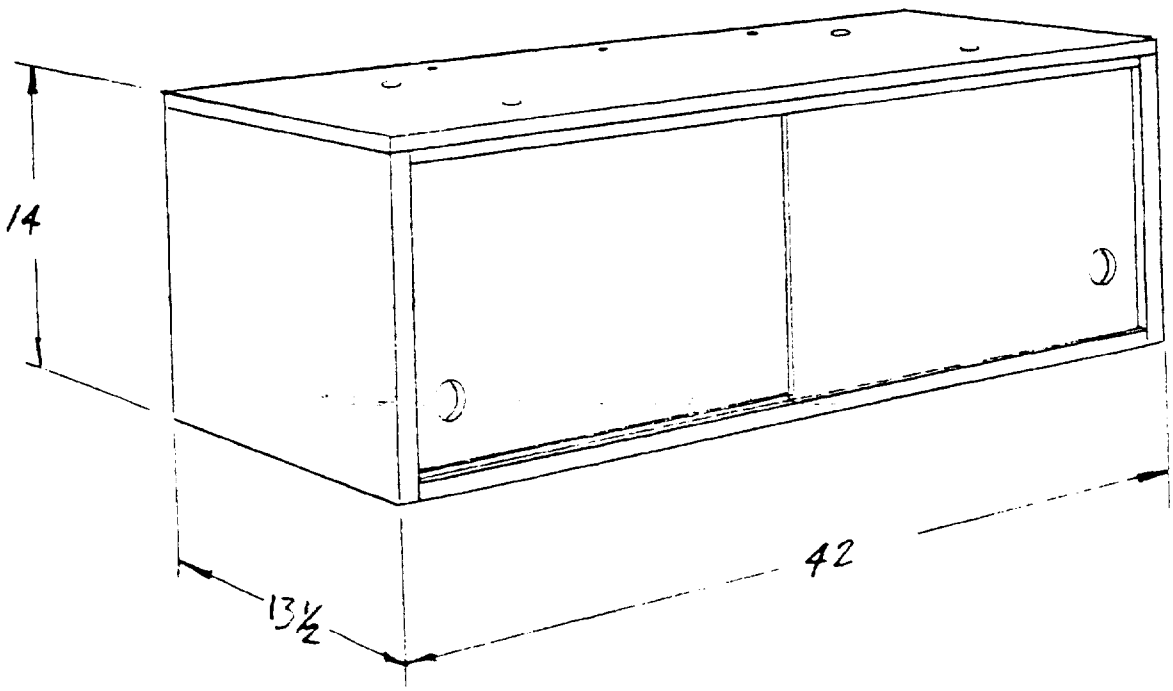


FIG 6A

OVERCHEST


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

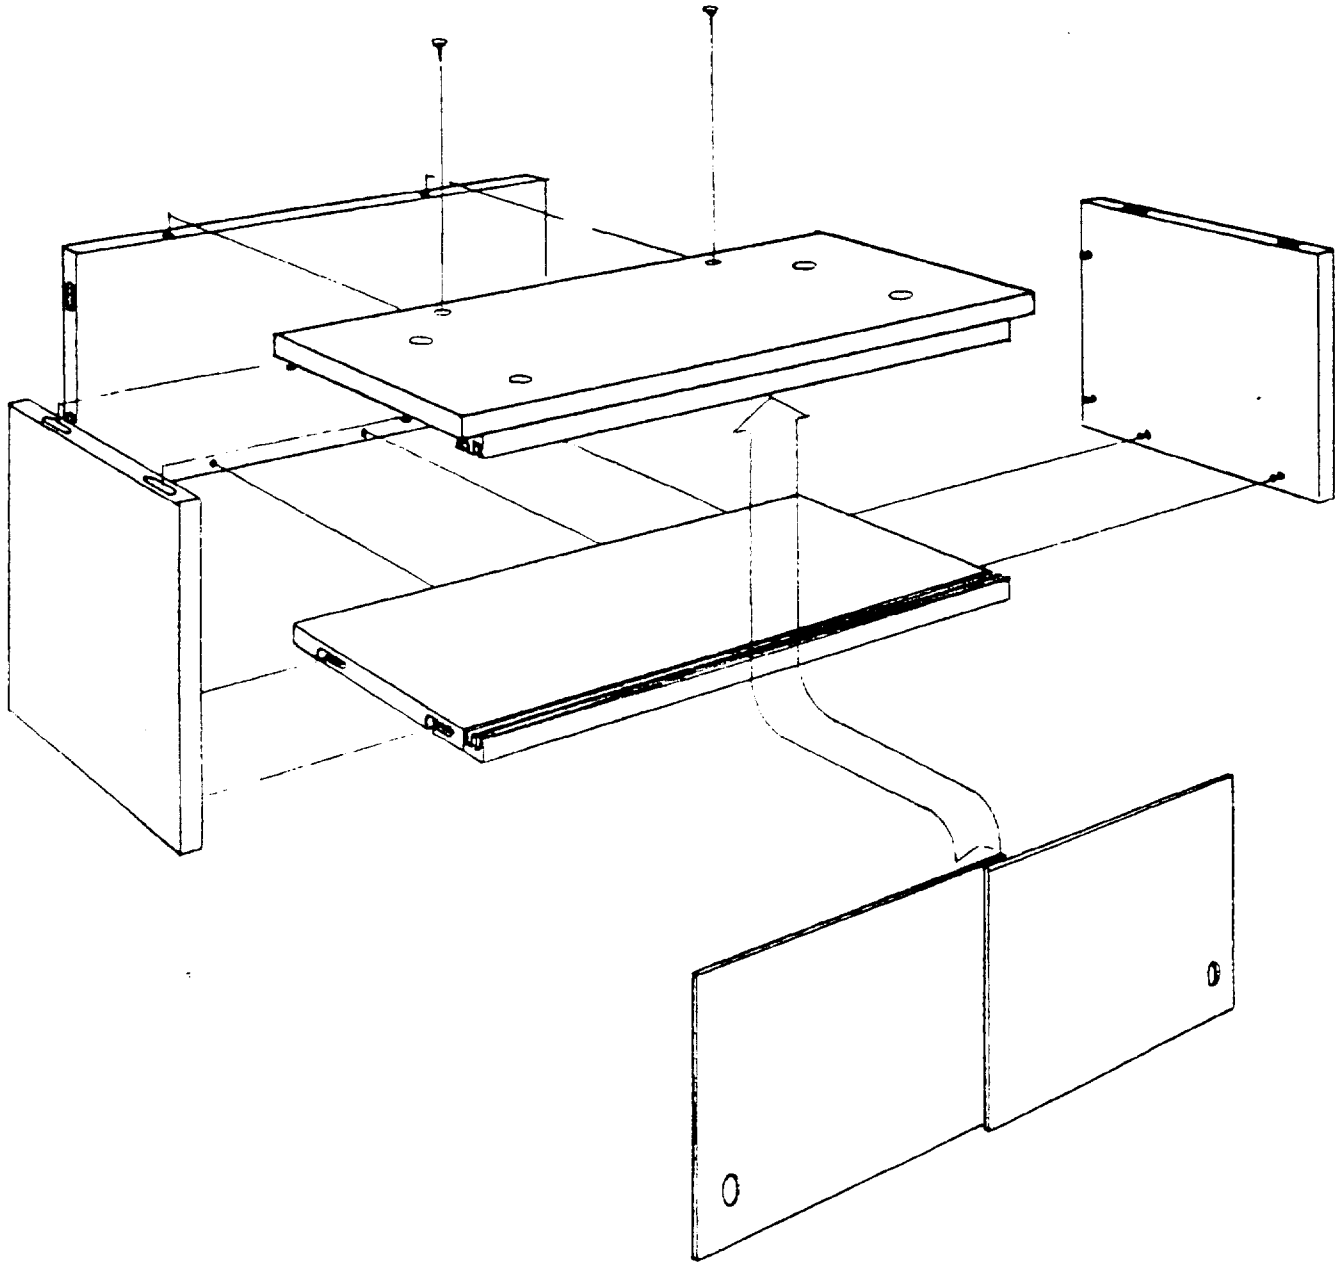

OVERCHEST ASS'Y

FIG 6B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

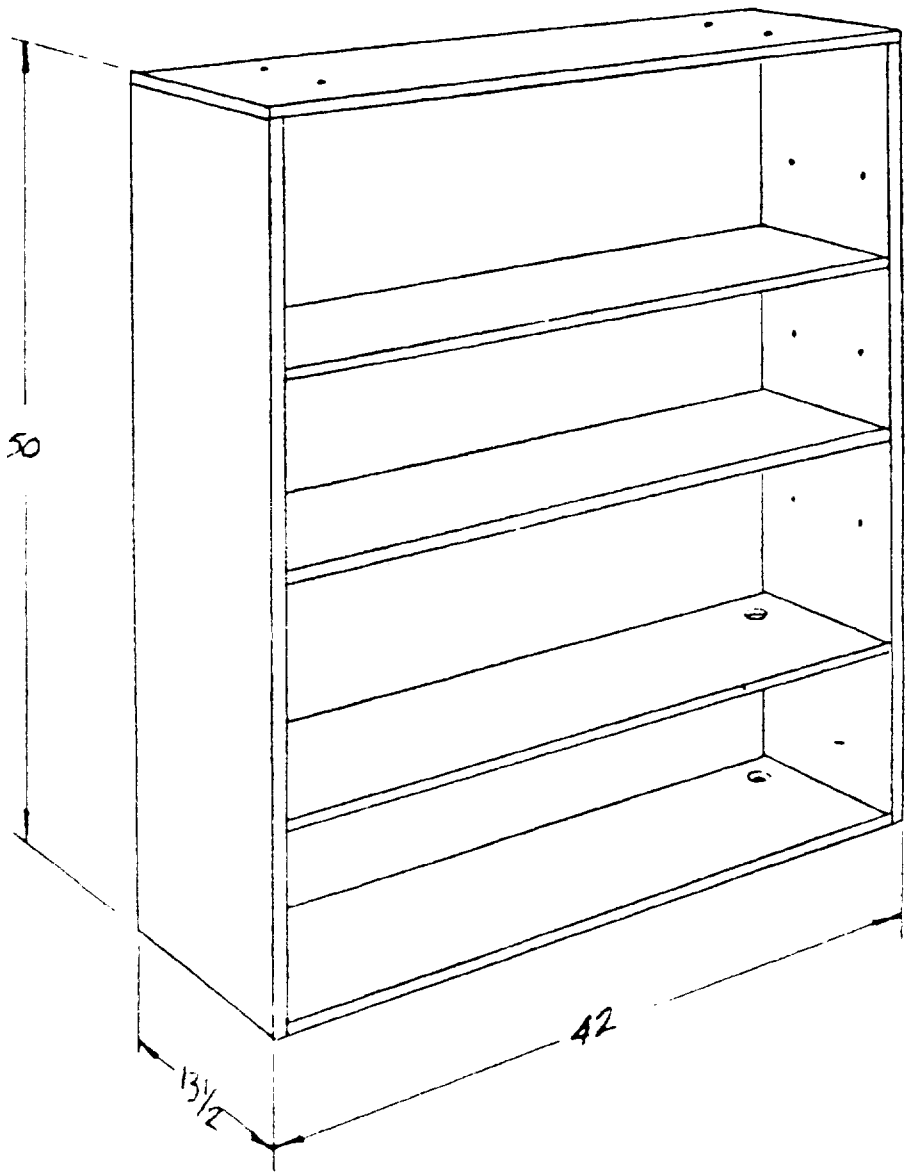

OPEN SHELF BOOKCASE

FIG A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

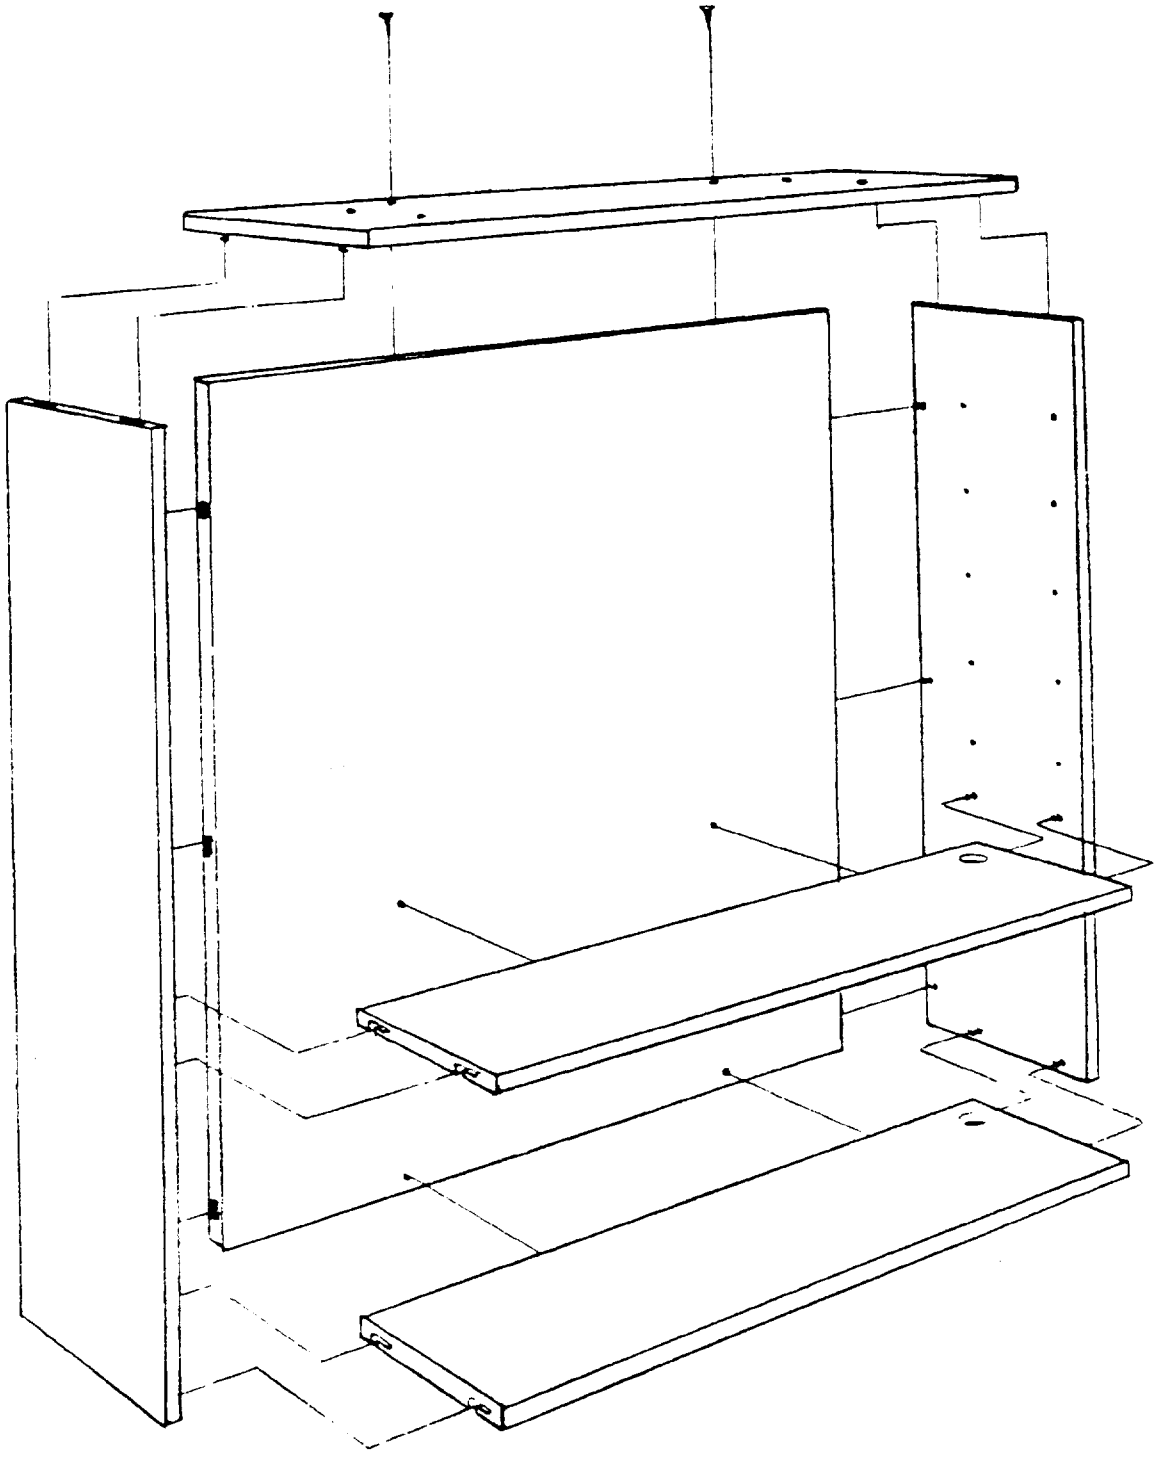

OPEN SHELF BOOKCASE ASS'Y

FIG 7B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

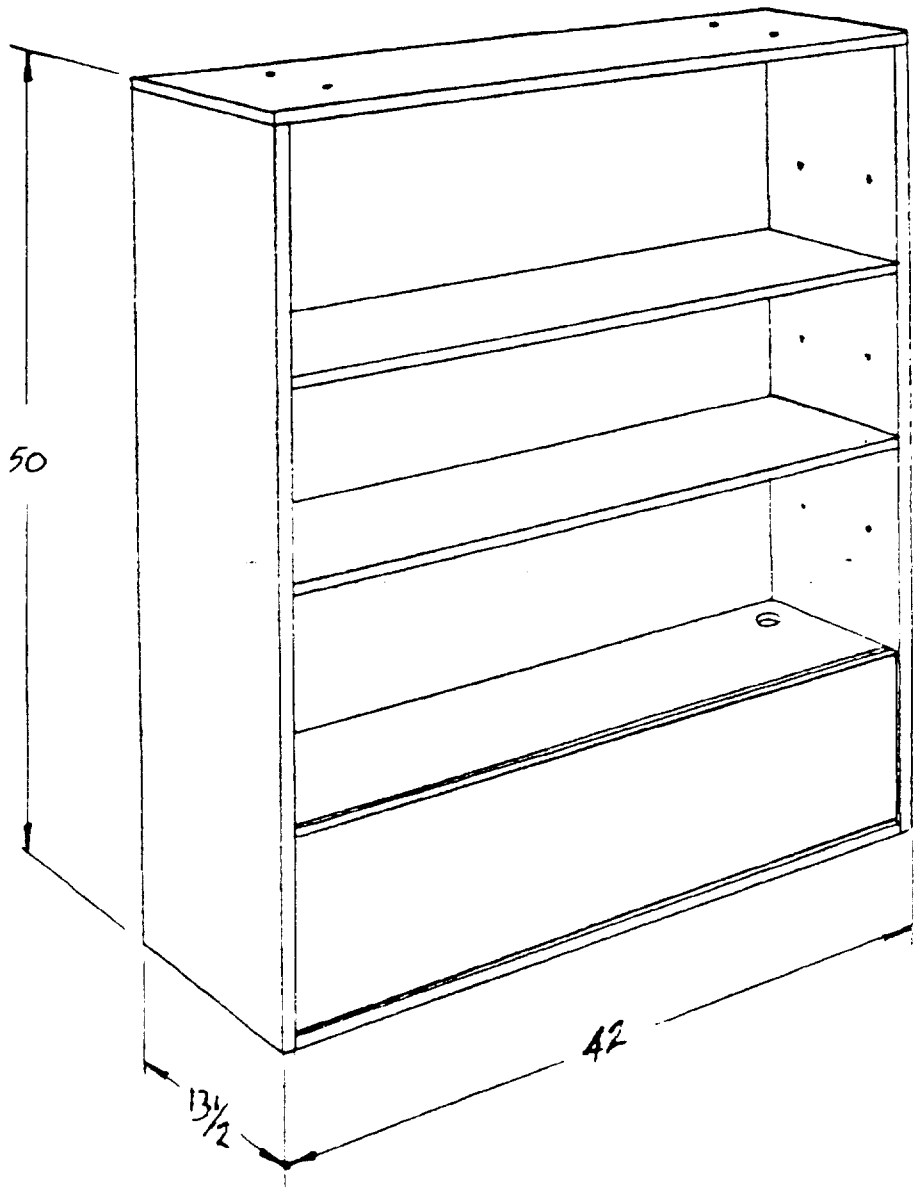

DROPLID BOOKCASE

FIG 8A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.


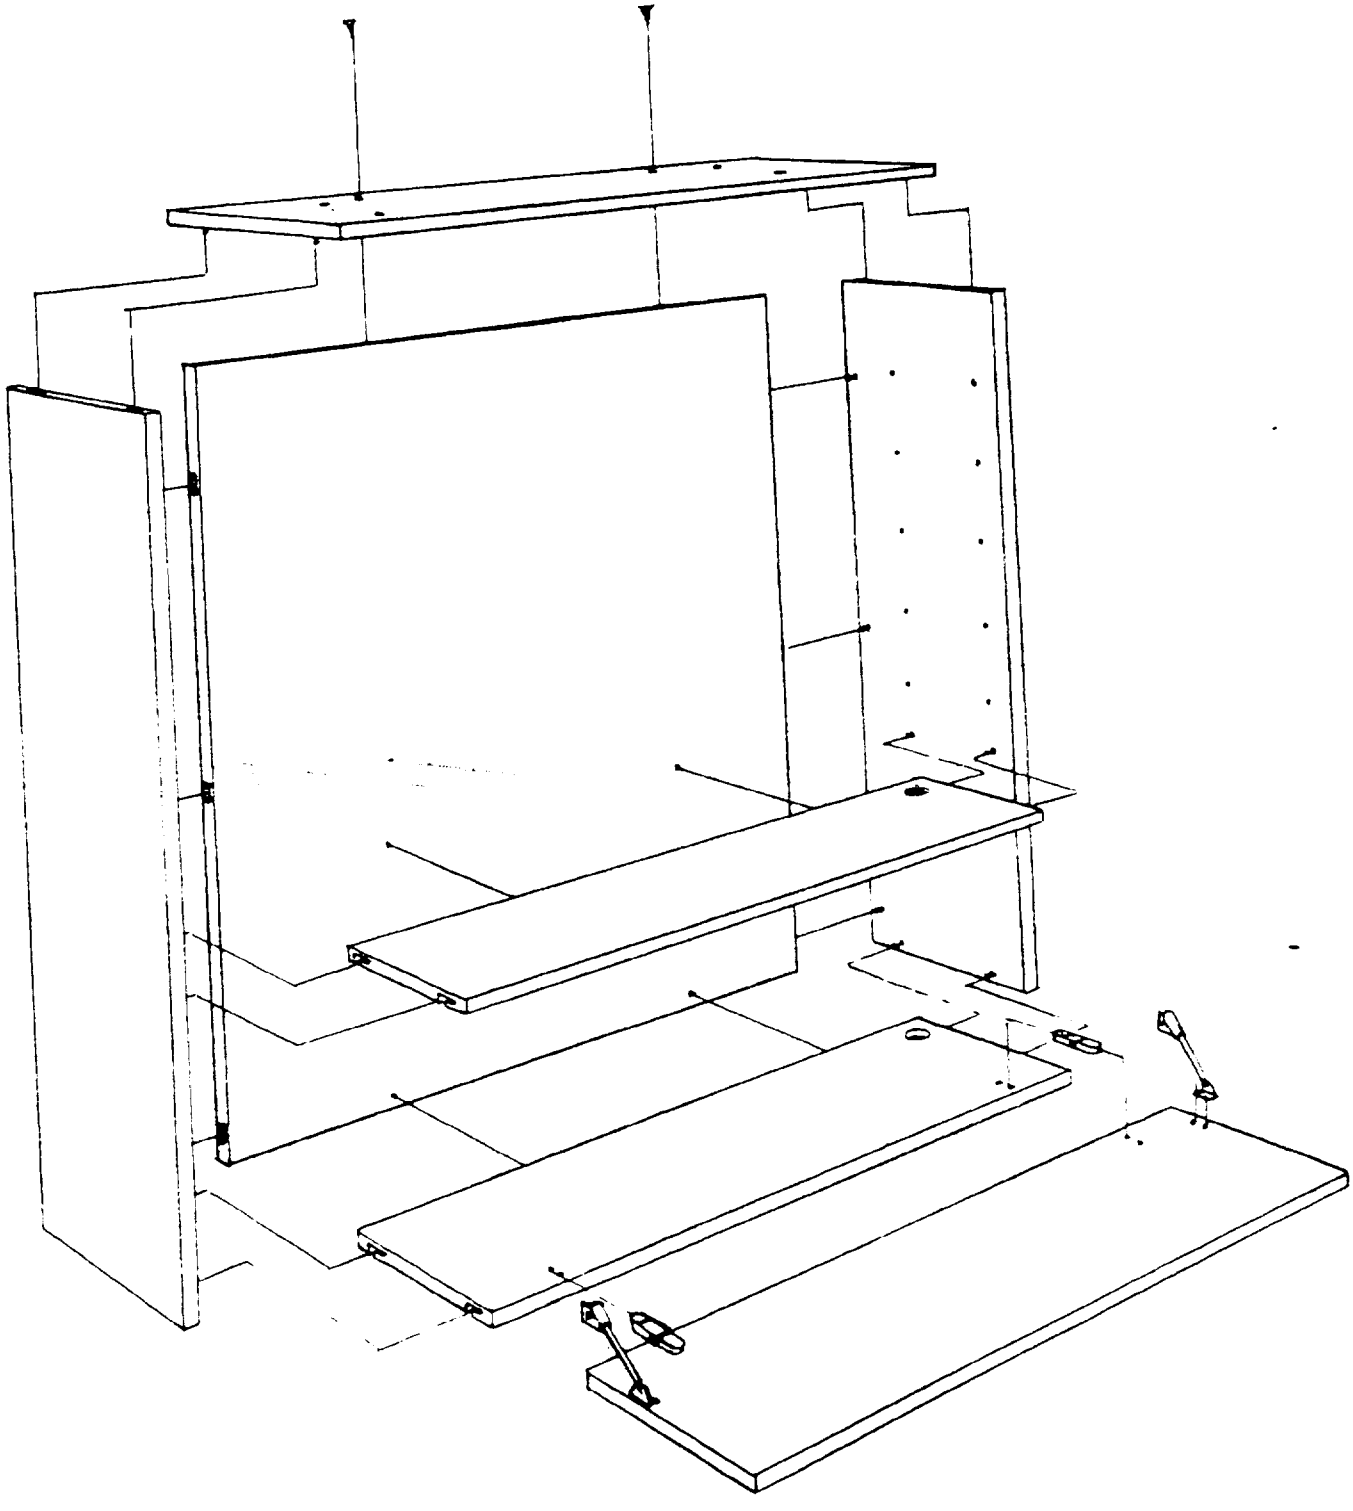


FIG 8B

DROPLID BOOKCASE ASS'Y


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

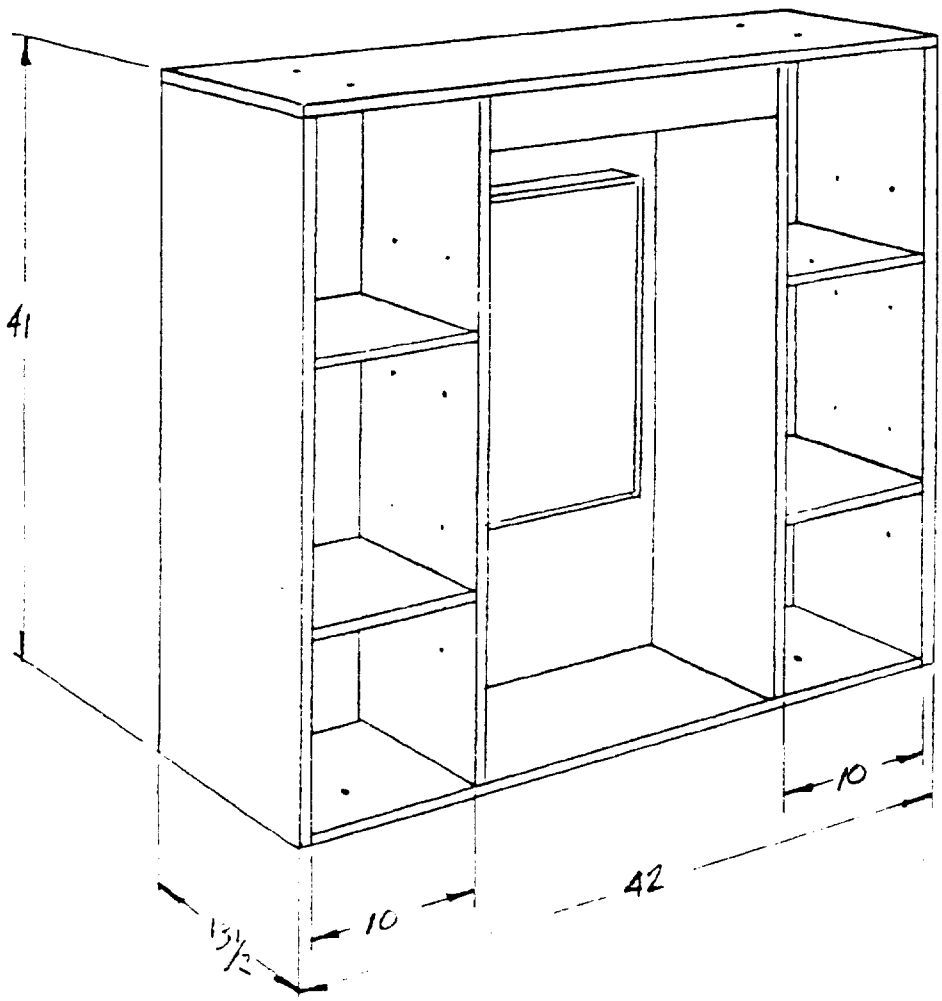

GROOMING UNIT TOP

FIG 9A


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

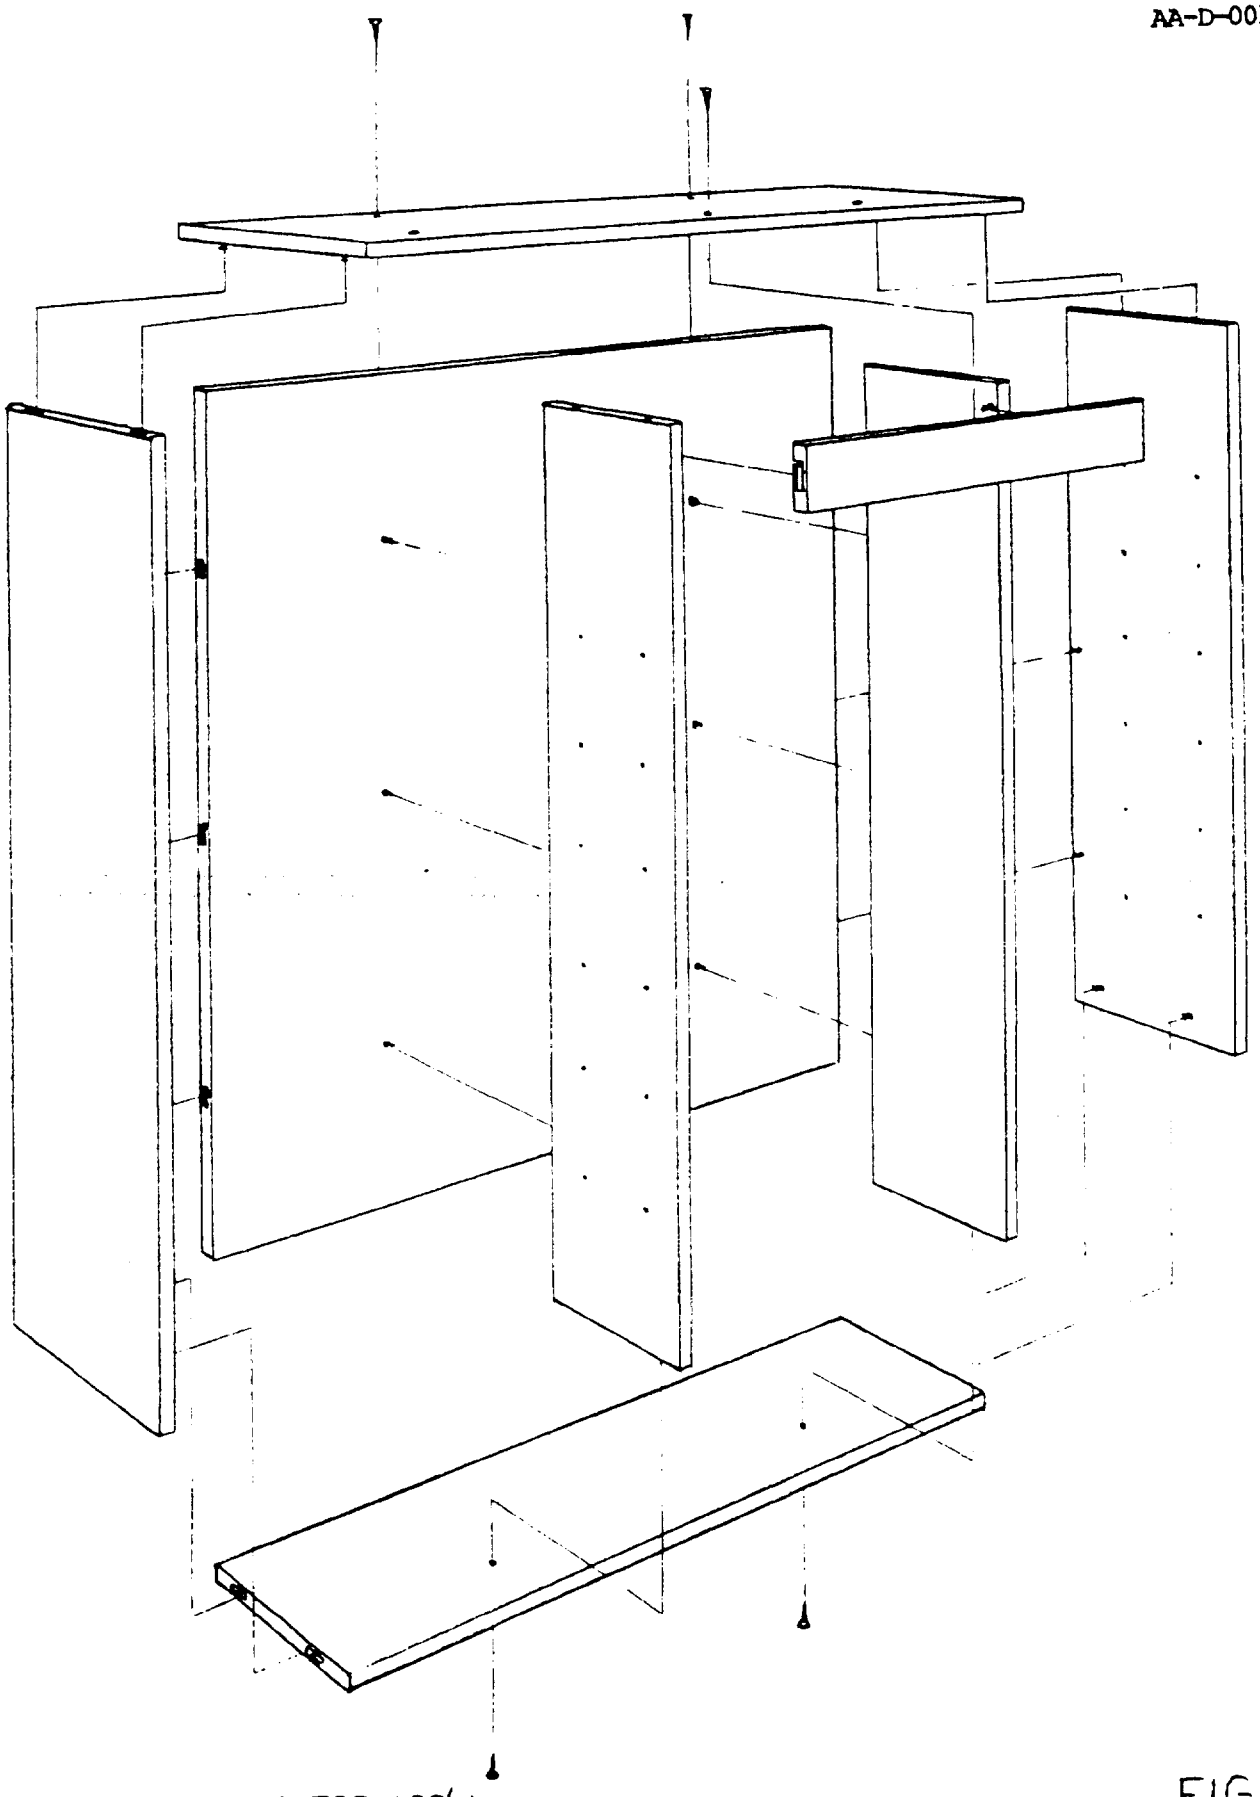

GROOMING UNIT TOP ASS'Y

FIG 9B


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

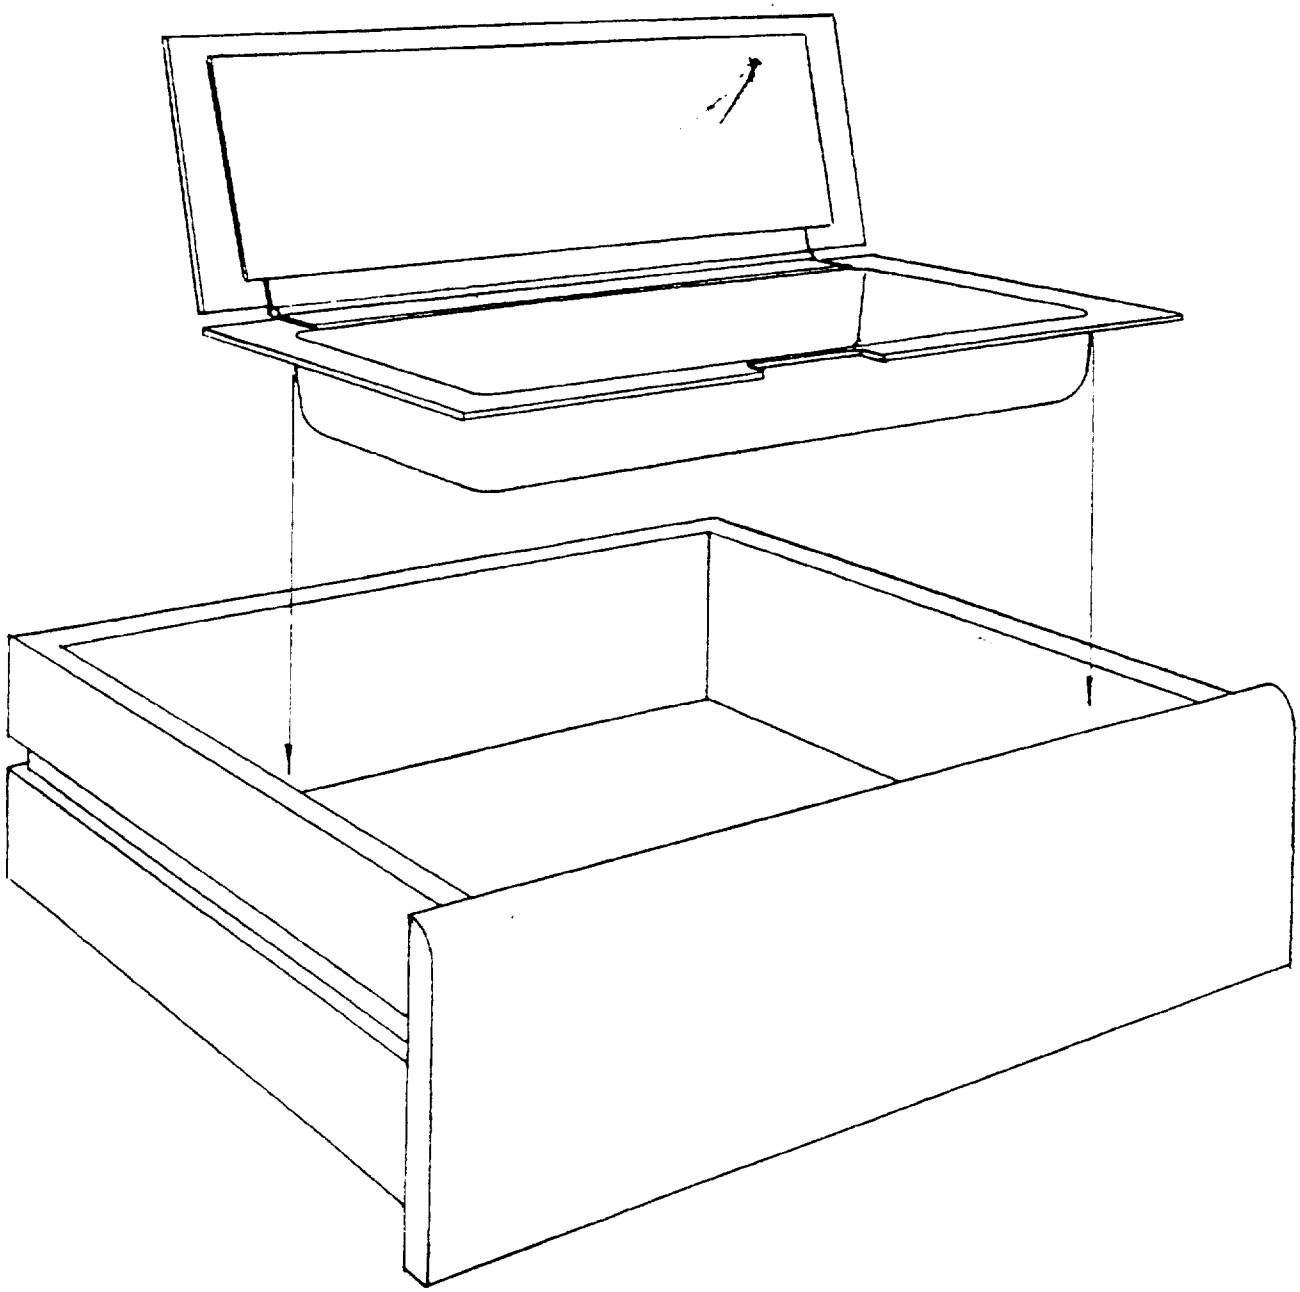

VANITY BOX

FIG 10 A

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.

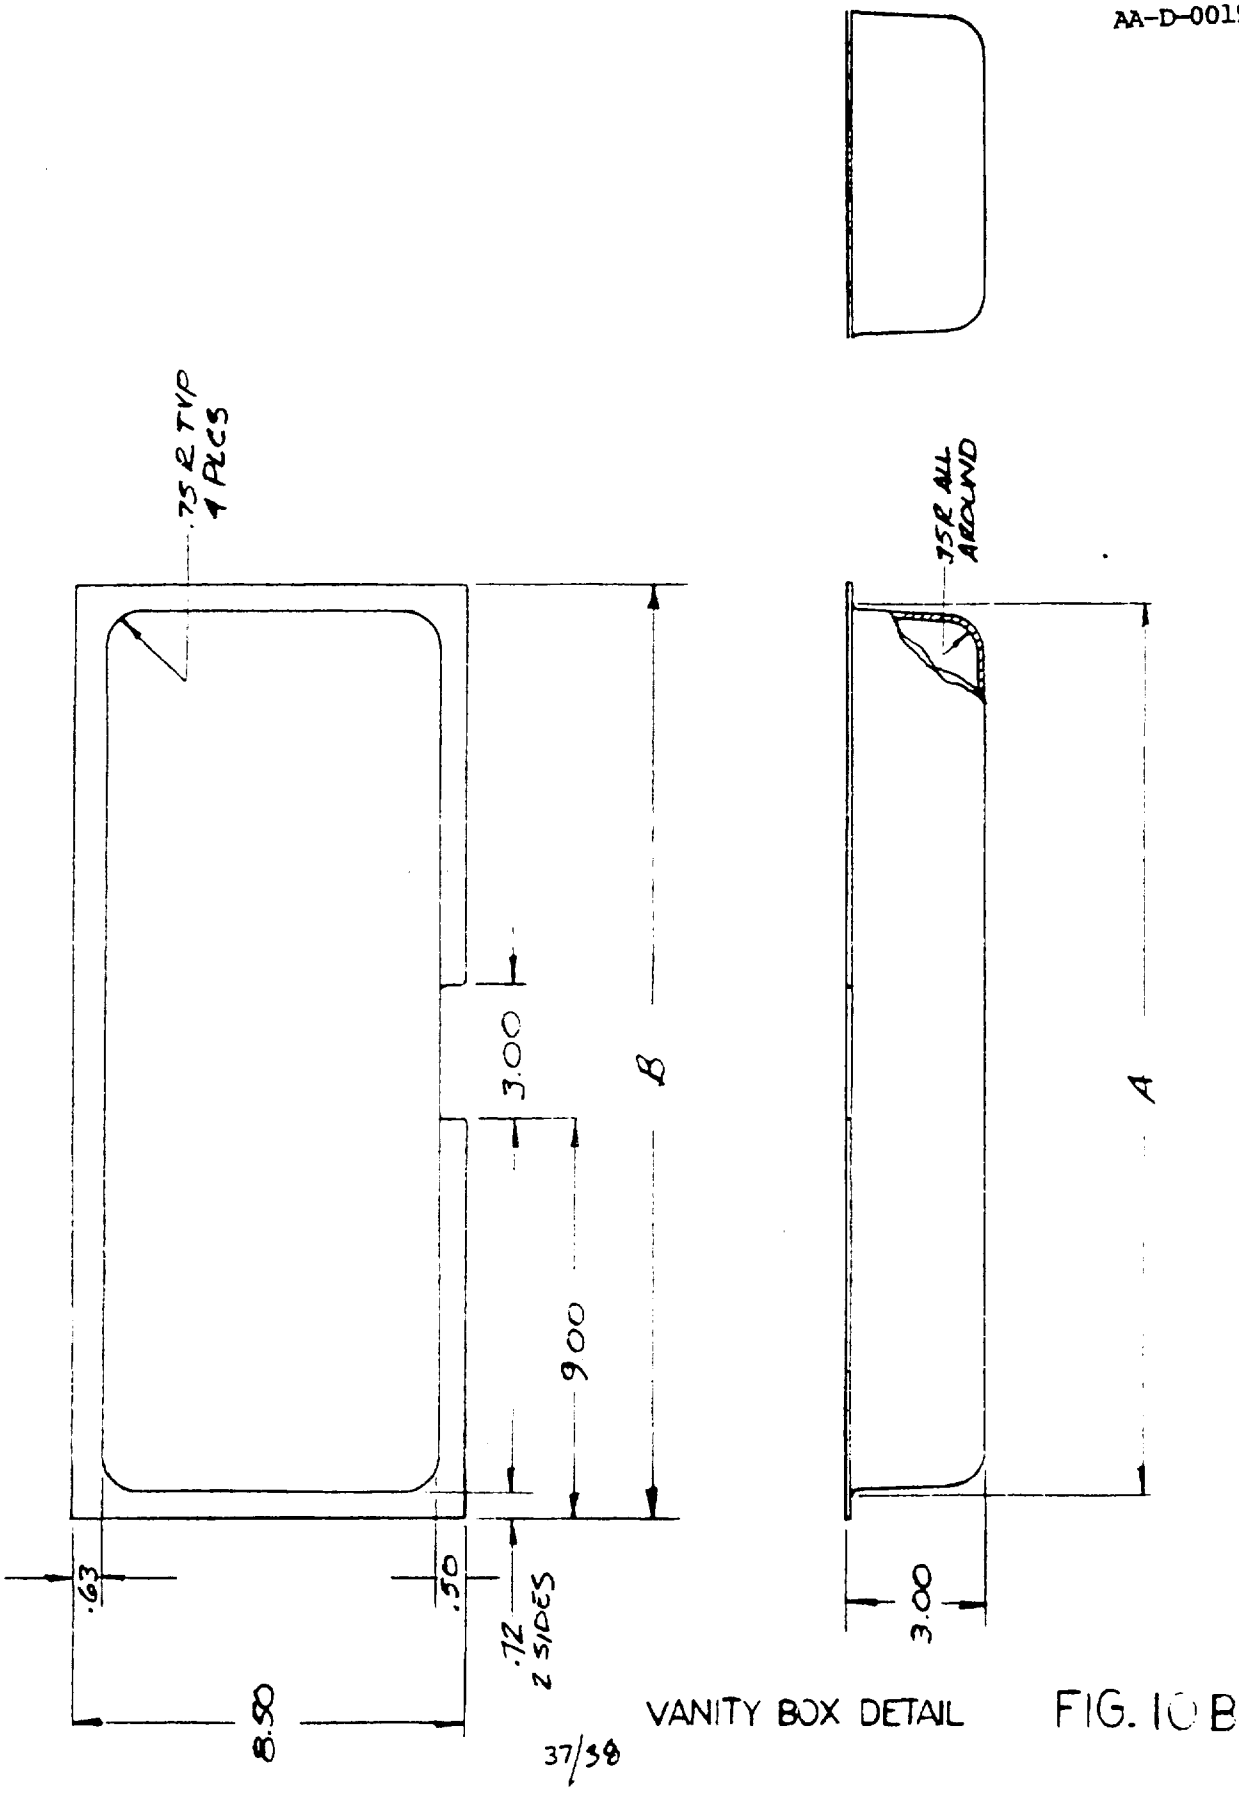

VANITY BOX DETAIL FIG. 10B

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:41Z
Check the source to verify that this is the current version before use.