AA-T-002023
February 7, 1977
(See 6.2)

INTERIM FEDERAL SPECIFICATION

TABLES; PARSONS, CUBE, DRUM AND PANEL

This Interim Federal Specification was developed by the National Furniture Center, Federal Supply Service, General Services Administration, Washington, D.C. 20406, based on currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers occasional tables which have completely laminated plastic exteric surfaces.

1.2 Classification. The tables shall be of the following types and sizes (see 6.1).

Type A - Parsons (see Fig. 1).

Size 1 - 16" Width x 16" Length x 16" Height
Size 2 - 18" Width x 18" Length x 16" Height
Size 3 - 24" Width x 48" Length x 16" Height
Size 4 - 24" Width x 60" Length x 16" Height
Size 5 - 24" Width x 24" Length x 21" Height
Size 6 - 24" Width x 30" Length x 21" Height
Size 7 - 30" Width x 30" Length x 21" Height
Size 8 - 14" Width x 48" Length x 25" Height
Size 9 - 14" Width x 54" Length x 25" Height
Size 10- 14" Width x 72" Length x 25" Height
Size 11- 18" Width x 40" Length x 29" Height
Size 12- 18" Width x 48" Length x 29" Height
Size 13- 18" Width x 54" Length x 29" Height
Size 14- 18" Width x 66" Length x 29" Height
Size 15- 18" Width x 72" Length x 29" Height
Size 16- 30" Width x 60" Length x 29" Height
Size 17- 36" Width x 48" Length x 29" Height
Size 18- 36" Width x 54" Length x 29" Height
Size 19- 36" Width x 60" Length x 29" Height
Size 20- 30" Diameter x 16" Height
Size 21- 48" Diameter x 16" Height
Size 22- 40" Diameter x 29" Height
Size 23- 48" Diameter x 29" Height

Type B - Cube (see Fig. 1).

Size 1 - 18" Width x 18" Length x 16" Height
Size 2 - 36" Width x 36" Length x 16" Height
Size 3 - 24" Width x 60" Length x 16" Height
Size 4 - 48" Width x 48" Length x 16" Height
Size 5 - 18" Width x 60" Length x 18" Height
Size 6 - 24" Width x 24" Length x 21" Height

Type C - Drum (see Fig. 1).

Size 1 - 18" Diameter x 16" Height
Size 2 - 24" Diameter x 16" Height
Size 3 - 36" Diameter x 16" Height
Size 4 - 18" Diameter x 21" Height

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

T-002023

Type D - Panel (see Fig. 1).

Size 1 - 18" Width x 18" Length x 16" Height
Size 2 - 24" Width x 48" Length x 16" Height
Size 3 - 24" Width x 60" Length x 16" Height
Size 4 - 24" Width x 24" Length x 21" Height
Size 5 - 22" Width x 30" Length x 21" Height
Size 6 - 18" Width x 48" Length x 27" Height
Size 7 - 18" Width x 60" Length x 27" Height
Size 8 - 18" Width x 72" Length x 27" Height
Size 9 - 30" Width x 60" Length x 29" Height
Size 10- 36" Width x 72" Length x 29" Height
Size 11- 40" Width x 96" Length x 29" Height

PPLICABLE DOCUMENTS

. The following documents of the issues in effect on the date of invitation for bids or request for al form a part of this specification to the extent specified herein.

eral Specifications:

L-P-508 - Plastic Sheet, Laminated, Decorative and Nondecorative.
L-T-0041 - Table Top and Furniture Assemblies.
LL-B-810 - Building Board, Hardboard, Hard Pressed Vegetable Fiber.

eral Standards:

Fed. Std. No. 123 - Marking for Shipment (Civil Agencies).

tivities outside the Federal Government may obtain copies of Federal Specifications, Standards, and oks as outlined under General Information in the Index of Federal Specifications and Standards and prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, gton, D.C. 20402.

ngle copies of this specification and other Federal specifications required by activities outside deral Government for bidding purposes are available without charge from Business Service Centers at neral Services Administration Regional Offices in Boston, New York, Washington, D.C., Atlanta, o, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

deral Government activities may obtain copies of Federal Specifications, Standards, and Handbooks e Index of Federal Specifications and Standards from the established distribution points in their es.)

itary Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

pies of Military Specifications and Standards required by contractors in connection with specific ement functions should be obtained from the procuring activity or as directed by the contracting r.)

Other publications. The following documents form a part of this specification to the extent ied herein. Unless a specific issue is identified, the issue in effect on date of invitation for r request for proposal shall apply.

ional Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

plication for copies should be addressed to the American Trucking Association, Inc., Tariffic Depart- 1616 P Street, NW, Washington, D.C. 20036.)

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:42Z
Check the source to verify that this is the current version before use.

Uniform Classification Committee, Agent:

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

U.S. Department of Commerce, Publication:

Commercial Standard CS-236	- Mat-formed wood Particleboard
Product Standard PS-51	- Hardwood and Decorative Plywood

(Copies of Commercial Standards and Product Standards may be obtained upon application, accompanied by money order, coupon or cash to Superintendent of Documents, Government Printing Office, Washington, D.C. 20402. Prices may be obtained from the Superintendent of Documents.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.1), before production is commenced, a sample of each type of the finished commodity on contract and each component part thereof shall be submitted or made ready for the contracting officer or his authorized representative to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all other applicable provisions of this specification. Production units shall not vary from the approved preproduction sample in design or construction without written approval of the contracting officer.

3.2 Material. All materials used shall be as hereinafter specified. All materials shall be unused in their present state and free from defects which affect serviceability or appearance of the finished product.

3.2.1 Adhesives. The adhesive to be used and the permitted application shall be as shown in Table I.

TABLE I. Adhesives

Application	Kind of Adhesives
All assembly joints, glue blocks, glued laminated stock, built-up stock.	Any adhesive that will develop an average block shear strength of not less than 2,800 pounds per square inch.
Laminating plastic	Contact adhesive which develops 60 pound pull.

3.2.2 Particleboard. The particleboard used shall be in accordance with any of the following types, grades, and classes as specified in Commercial Standard CS-236.

Type I, grade A (high density), class 1.

Type I, grade B (medium density), class 2 (for panels not less than one inch thick).

Type I, grade B (medium density), class 2 with a minimum average screw holding capacity of 235 pounds on the edges and 285 pounds on the face (for panel less than one inch thick).

Type II, grade A (high density), class 2.

The thickness of the particleboard shall be as specified herein. The moisture content of the particleboard shall not exceed 9 percent at time of plastic laminate assembly.

3.2.3 Plywood. Plywood shall conform to the requirements of Product Standard PS-51 for Sound grade (2), Type II, construction 1, 3 or 5.

3.2.4 Hardboard. Hardboard shall be Type I standard, surface 1 or 2, finish A and thickness 1/8 inch as required in LLL-B-810.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:42Z
Check the source to verify that this is the current version before use.

.5 Laminated plastic.

.5.1 Decorative laminated sheets. The decorative plastic laminate shall conform to the requirements le D, type I, class 1 of L-P-508 with a thickness of 0.050 inch, plus or minus 0.004 inch. The pattern and finish shall be as specified in the invitation for bid.

.5.2 Nondecorative laminated sheets. Tops having plywood or particleboard cores shall have a non- tive, laminated plastic backing sheet conforming to style ND, type IV of L-P-508 with a thickness of ss than 0.030 inch, plus or minus 0.004 inch.

.6 Fastening devices. All bolts, nuts, screws, washers, and other fastening devices except oiled rods shall be made corrosion resistant in accordance with the manufacturer's standard commercial ce, except the use of paint or lacquer as sole corrosion resistant agent is prohibited.

.7 Glides. Glides shall be nail type, minimum 5/8 inch nail, stainless steel or steel with nickel mium plating. Alternatively, the glides may be high impact plastic. The diameter of the glides be not less than 3/4 inch nor more than 2 inches and shall be compatible with the component with they are used.

Construction. The construction requirements specified herein are minimum. The contractor will these requirements (without altering the general configuration, basic design concept or primary uction specified or illustrated herein) wherever necessary to conform to the performance tests as ied in 4.5. Any detail not specified herein shall be consistent with good quality production of r commercial products. All elements of construction shall be free of any conditions which hinder oper function of any part of the units or which constitute a potential hazard to personnel or their ng.

.1 Design. The design of the tables shall be as illustrated in Figure 1. Corners and edges shall ore.

.2 Assembly. All mechanical attachments, gluing and doweling shall provide secure and rigid in proper alignment.

.3 Tolerances. The overall dimensions of the tables shall have a design tolerance of plus or minus ch and a fabricating tolerance of plus or minus 1/8 inch.

.4 Components and parts requirements.

.4.1 Type A Parsons.

.4.1.1 Top. The top panel shall be a minimum of 3/4 inch thick and shall be constructed in accor- with any of the types in Federal Specification L-T-0041. The top shall be surfaced with a decora- lastic laminate as specified in 3.2.5.1 and the underside shall have a backing sheet as specified in 2. Alternatively, the top may be a box construction having the underside covered with 1/8 inch ard as specified in 3.2.4.

.4.1.2 Apron. Each side of the table shall have an apron 2-1/2 inches high, plus or minus 1/16 hen measured from the top surface of the top to the bottom vertical edge of the apron. The apron be formed by frame members, glued and screwed or glued and stapled to the underside of the top. natively, the top may be 2-1/2 inches thick, eliminating the need for frame members. The frame s shall be full length solid or built-up medium density hardwood, particleboard as specified in or plywood as specified in 3.2.3. Each frame member shall have countersunk screws a maximum of 4 from each end and a maximum of 6 inches apart. The frame members shall be a minimum of 1-1/2 wide. The aprons shall be surfaced with plastic laminate as specified in 3.2.5.1.

.4.1.3 Legs. The legs shall be full length solid or built-up medium density hardwood or 4 full pieces of 3/4 inch particleboard glued or stapled together. The legs shall be 2-1/2 inches square r minus 1/16 inch and shall be joined to the aprons with glue and double dowels or mortise and . Alternatively, the legs may be joined to the top by a "T" nut, threaded steel rod, fender washer, asher and hex nut assembled under a minimum of 65 pounds pressure. The leg joints shall be rein- by corner blocks or "L" bracers joining the legs to the aprons. The legs shall be surfaced on all with plastic laminate as specified in 3.2.5.1. If a face seam is required, plastic laminate on the hall have a 45 degree miter seam with the two adjacent aprons. Glides, as specified in 3.2.7, shall ached to the bottom of each leg.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:42Z
Check the source to verify that this is the current version before use.

3.3.4.2 Type B Cube.

3.3.4.2.1 Top. The top panel shall be a minimum of 3/4 inch thick and shall be constructed in accordance with any of the types in Fed. Specification L-T-0041. The top shall be surfaced with a decorative plastic laminate as specified in 3.2.5.1.

3.3.4.2.2 Sides. The side panels shall be constructed as specified in 3.3.4.2.1 and shall be butt joined to the top and each other. The joints shall be glued and stapled. The size 1, size 2, size 3 and size 4 side panels shall be 14 inches high. The size 5 side panels shall be 15-1/2 inches high. The size 6 side panels shall be 19 inches high.

3.3.4.2.3 Bottom. The bottom panel shall be constructed of a minimum of 5/8 inch particleboard as specified in 3.2.2 and shall be butt joined to the side panels. The joints shall be glued and stapled.

3.3.4.2.4 Base. The base panels shall be constructed as specified in 3.3.4.2.1 and shall be butt joined to each other. The joints shall be glued and stapled and the corners shall be reinforced with corner blocks glued and stapled. The base shall be centered and joined to the bottom panel and the joints shall be glued and stapled. The base panels shall be parallel to the side panels and glides, as specified in 3.2.7, shall be attached to each corner of the base. The size 1 base shall be 14 inches wide by 14 inches long by 2 inches high. The size 2 base shall be 32 inches wide by 32 inches long by 2 inches high. The size 3 base shall be 19 inches wide by 55 inches long by 2 inches high. The size 4 base shall be 43 inches wide by 43 inches long by 2 inches high. The size 5 base shall be 13 inches wide by 55 inches long by 2-1/2 inches high. The size 6 base shall be 20 inches wide by 20 inches long by 2 inches high.

3.3.4.3 Type C Drum.

3.3.4.3.1 Top. The top panel shall be constructed as specified in 3.3.4.2.1.

3.3.4.3.2 Cylinder. The cylinder part of the table shall be a minimum of 3/16 inch thick and shall be constructed of hardboard as specified in 3.2.4 and the surface shall be plastic laminate as specified in 3.2.5. The seam shall be perpendicular to the top. Alternatively, the cylinder may be constructed of Sonotube or equal (see 6.3) minimum 1/2 inch thick and the surface shall be plastic laminate as specified in 3.2.5.1. The cylinder shall be supported inside by vertical "X" and/or donut ribs. The cylinder shall be butt joined to the top and the joints shall be glued and stapled. The cylinder shall be 14 inches high for sizes 1, 2 and 3 and 19 inches high for size 4.

3.3.4.3.3 Bottom. The bottom panel shall be constructed of a minimum of 5/8 inch particleboard as specified in 3.2.2 and shall be butt joined to the cylinder. The joints shall be glued and stapled.

3.3.4.3.4 Base. The base shall be constructed as specified in 3.3.4.2.4. The base shall be centered and joined to the bottom panel as specified in 3.3.4.2.4 and shall have glides as specified in 3.2.7. The size 1 and size 4 base shall be 10 inches wide by 10 inches long by 2 inches high. The size 2 base shall be 14 inches wide by 14 inches long by 2 inches high. The size 3 base shall be 22 inches wide by 22 inches long by 2 inches high.

3.3.4.4 Type D Panel.

3.3.4.4.1 Top. The top panel shall be constructed as specified in 3.3.4.1.1.

3.3.4.4.2 Apron. The apron shall be constructed as specified in 3.3.4.1.2.

3.3.4.4.2 End Panel. The end panel shall be constructed as specified in 3.3.4.1.1 and 3.3.4.1.2, shall be 2-1/2 inches thick, plus or minus 1/16 inch and shall be joined to the aprons as specified in 3.3.4.1.3. Alternatively, a lag bolt may be used. The end panel shall be surfaced on all faces with plastic laminate as specified in 3.2.5.1. If a face seam is required, the plastic laminate shall have a 45 degree miter seam with the two adjacent aprons. Each end of the bottom shall have a glide as specified in 3.2.7.

3.4 Finish. All exposed surfaces not covered by plastic laminate or backing sheet shall be sealed. Corners and edges shall be eased 1/16 inch.

3.5 Identification marking. Each table shall be permanently marked in an inconspicuous place in a plain and legible manner with the date of manufacture (month and year), the contractor's name or trademark and the contract number so that the source of supply may be readily determined.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:42Z
Check the source to verify that this is the current version before use.

.6 Workmanship. The details of construction including design, joining, assembly and marking shall be ccordance with cited requirements and tolerances provided. All joints shall be tight and the plastic nate surfaces shall be smooth and free of blisters. All seams shall be not more than hairline and the od of construction and assembly of the tables shall be such that they are free of all defects that de- t from appearance or serviceability.

QUALITY ASSURANCE PROVISIONS

.1 Inspection responsibility. The supplier is responsible for the performance of all inspection re- ements as specified herein. Unless otherwise specified (see 6.1) the supplier may utilize his own or other inspection facilities and services acceptable to the Government. Inspection records of the ination and tests shall be kept complete and available to the Government as specified in the contract rder. The Government reserves the right to perform any of the inspections set forth in this specifi- on where such inspections are deemed necessary to assure that supplies and services conform to pre- bed requirements.

.2 Lot acceptance tests. Lot acceptance tests shall be conducted under the supervision of the rnment Inspector at the manufacturer's plant. In the event the manufacturer does not have the facili- to perform the required tests, he shall engage the services of commercial testing laboratories accep- e to the Government. Copies of the laboratory report shall be submitted to the Government Inspector receipt from the laboratory. All examination and testing shall be in accordance with section 4 of specification.

.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed ccordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

.4 Inspection (end item).

.4.1 Visual examination. Examination of the end item(s) shall be in accordance with the classifica- of defects specified in Table II and acceptable quality levels (AQL's) specified in 4.4.3. The lot shall be expressed in the number of completed units for the purpose of determining the sample size in rdance with MIL-STD-105. The sample unit for this examination shall be one complete table of each on contract.

(only one of defects in brackets shall be scored for each unit of product examined)

TABLE II. Classification of defects

ine	Defect	Classification Major	Minor
ls	Laminated panels not of material specified.	X	
tic	Not material specified (face or backing).	X	
	Area of no adhesion.)		
	Wrong grain or color.)		
	Face sheet damaged, dented,)		
	discolored or not one piece.)	X	
	Face sheet nicked or scratched)		
	affecting appearance.)		
manship	Aprons not edged as specified.	X	
nd	Parts or components missing,		
truction	malformed or fractured.	X	
	Burrs or sharpness of any component.		X
	Components not of dimension specified.	X	
	Component loose or insecurely joined.	X	
	More than one screw missing, stripped or not tight.		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:42Z
Check the source to verify that this is the current version before use.

4.4.2 Dimensional Examination. Inspection will be made for compliance with all dimensions specified. Any dimension not within tolerance specified shall be classified as a minor defect.

4.4.3 Inspection levels and AQL's. The acceptable quality levels (AQL's) expressed in defects per hundred units, and inspection levels, shall be as follows:

	Inspection levels	AQL's
For examination in Table II Major ----------	II	4.0
For examination in Table II Total ----------	II	10.0
For examination in 4.4.2 (1 Class) ----------	II	4.0

4.5 Performance tests.

4.5.1 Materials tests.

4.5.1.1 Contact adhesive. An appropriate test panel shall be prepared to test the bond of the plastic laminate to the top. A tensiometer or scale shall be attached to a 1 square inch block located at each corner of the test panel. A 60 lb. pull shall be applied to one block at a time, perpendicular to the panel top. Any delamination, loosening or failure which affects the serviceability of the panel shall be cause for rejection.

4.5.1.2 Other adhesives. Test for adhesives shall be as shown in Table III.

TABLE III. Test for adhesives

Component	Characteristic	Requirement Reference	Test Method	Sample Unit
Adhesive	Block shear test	3.2.1	ASTM D-905 1/ 2/ 3/	1/2 pint

1/ The following modifications apply when testing casein-type adhesive. The test blocks shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 pounds per square inch, and the test blocks shall be held under pressure for at least four hours.

2/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.

3/ Whenever a specimen fails at a load of less than 2,800 pounds per square inch and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 2,800 pounds per square inch or higher, the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 2,800 pounds per square inch.

4.5.2 End item tests. Test the largest table of each Type on contract during the preproduction inspection.

4.5.2.1 Laminate plastic panel impact test. Vertically drop an 8 ounce steel ball from a height of 24 inches on at least 10 different locations on each laminate plastic surface of the table so that the entire surfaces are tested. The surfaces shall be parallel to the floor when the test is performed. Any cracking, denting or deformation of the panels shall be cause for rejection.

4.5.2.2 Leg impact test. A 2 x 4 wood block shall be securely positioned so that it will come in contact with one leg or base corner at their lowest point. The table shall be pushed along the floor at a normal walking speed of between 2.5 and 3.0 miles per hour for a distance of 10 feet. The block and table shall be positioned so that only one leg or base corner strikes the obstacle at time of impact. Pressure shall be released at impact. Each leg and base corner shall be subjected to the test. Any permanent deformation, set, loosening or any failure which affects the serviceability of the table shall be cause for rejection. Surface damage to plastic shall not constitute a failure.

4.5.2.3 Static loading. The height of the table shall be measured accurately. A static load of 400 pounds shall be applied vertically to a 12 inch diameter area in the center of the table top and allowed to remain in place for 30 minutes. Upon removal of the load, the height shall be measured. Any permanent distortion of more than 1/8 inch or any failure which affects the serviceability and appearance of the table shall be cause for rejection.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:42Z
Check the source to verify that this is the current version before use.

4.5.2.4 Drop test. Glides shall be removed and legs or base shall be restricted from movement. A bag sand not more than 16 inches in diameter, weighing 300 pounds, shall be dropped one time onto the ter of the table from a height of 6 inches. Any permanent deformation, set, loosening, or any failure ch affects the serviceability of the tables shall be cause for rejection.

4.6 Examination of preparation for delivery. An examination shall be made to determine whether the aging, packing and marking comply with the requirements in section 5 of this specification. Defects l be scored in accordance with Table IV. For examination of interior packaging, the sample unit shall one shipping container fully prepared for delivery, selected at random, just prior to the closing rations. Sampling shall be in accordance with MIL-STD-105. Defects of closure listed shall be examined shipping containers fully prepared for delivery. The lot size shall be the number of shipping con- ners in the end item inspection lot. The inspection lot shall be S-2 with an AQL of 4.0 defects per dred units.

TABLE IV. Classification of preparation for delivery defects

hine	Defects
kings	Omitted; incorrect; illegible; improper size, location, sequence or method of application.
erial	Any component missing or damaged.
manship	Inadequate application of components, such as closure of container flaps, loose strapping, inadequate stapling or distortion of container.
tents	Net weight exceeds box specification requirements.

PREPARATION FOR DELIVERY

5.1 Packaging. Each table shall be packaged in accordance with the manufacturer's standard practice viding that this will insure protection for the table during shipment and will provide for safe very to its destination.

5.2 Packing. Tables packaged as specified in 5.1 shall be packed in containers that will assure ier acceptance and safe arrival at destination in compliance with the Uniform Freight Classification s or National Motor Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.1).

5.3.1 Civil agencies. Shipping containers shall be marked in accordance with Fed. Std. No. 123 and 3."

5.3.2 Military agencies. Shipping containers shall be marked in accordance with MIL-STD-129 and 3."

5.3.3 Special marking. In addition to the marking required by 5.3.1 or 5.3.2 each shipping container l be marked as follows in characters a minimum of one inch high:

upper corners of each side and each end shall be marked with the word "UP" and an arrow pointing to top of the container.

top panel of each container:

TOP
THIS SIDE UP
FURNITURE - HANDLE WITH CARE

side and one end of each container:

FURNITURE

HANDLE WITH CARE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:


(a) Title, number and date of this specification.
(b) Type and size required (see 1.2).
(c) When preproduction samples are not required (see 3.1).
(d) Color, pattern and finish of decorative laminated sheets required (see 3.2.3.1).
(e) When specific test facilities and services are required (see 4.1).
(f) Marking required (see 5.3).

6.2 Supersession data. This specification includes the requirement of Purchase Description FMSF 72-21B.


6.3 Sonotube. Sonotube is manufactured by:

Sunoco Products Co.
Post Office Box 65095
Charlotte, NC 28265

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:42Z
Check the source to verify that this is the current version before use.

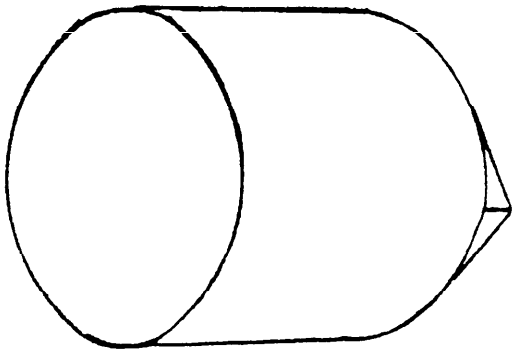


Type C Drum

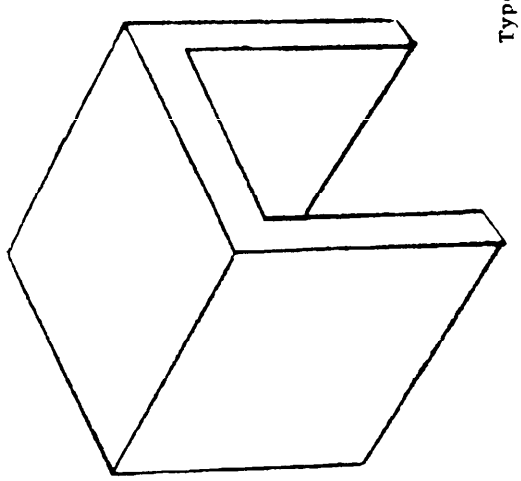


Type D Panel

Fig. 1

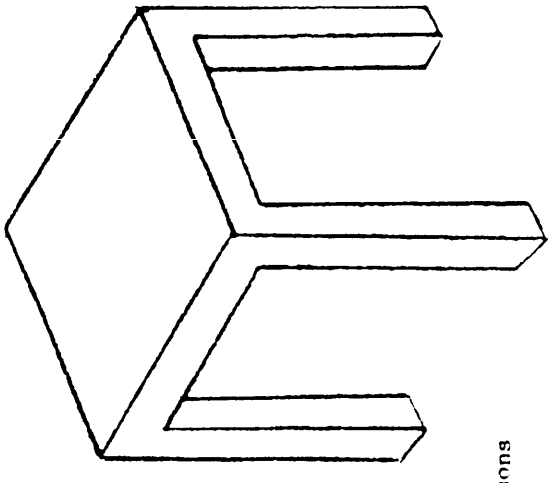

Type A Parsons

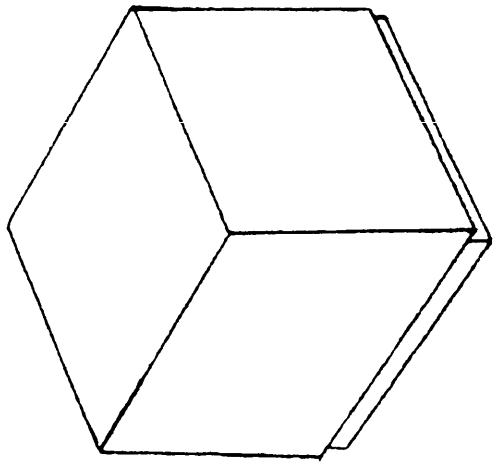

Type B Cube

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:42Z
Check the source to verify that this is the currentversion before use.