K-B-100c
July 24, 1967
SUPERSEDING
Fed. Spec. K-B-100b
January 5, 1966

FEDERAL SPECIFICATION

BASKETS, FRAME MOUNTED, REMOVABLE CLOTH OR PLASTIC LINERS AND NONREMOVABLE CLOTH LINERS

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers steel frames with or without cloth or plastic liners and cloth or plastic liners only.

1.2 Classification.

1.2.1 Types. The baskets shall be the following types as specified (see 6.2 and figures 1 through 10):

Type I - Steel frames with removable cloth or plastic liner (see table I).
Type II - Steel frame with nonremovable cloth liner (see table I).

1.2.2 Size. Sizes shall be as specified in table I for types indicated (see 6.2).

2. APPLICABLE DOCUMENTS

2.1 Specifications and standards. The following specifications and standards, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

T-C-571 - Cords, Cotton; General and Special Purpose, Sash and Venetian Blind.
V-T-276 - Thread, Cotton.

FSC 7240/3510

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

V-T-295	-	Thread, Nylon.
FF-R-556	-	Rivets, Solid, Small; Rivets, Split, Small; Rivets, Tubular, Small; and Caps, Rivets; General Purpose.
QQ-P-416	-	Plating, Cadmium (Electrodeposited).
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-S-781	-	Steel, Strapping, Flat.
QQ-W-428	-	Wire, Steel, High Carbon, Round, Uncoated for Mechanical Springs, (General Purpose).
QQ-Z-325	-	Zinc Coating, Electrodeposited, Requirements for.
TT-I-542	-	Ink, Marking, Laundry, Black.
TT-P-98	-	Paint; Stencil, Flat.
CCC-C-419	-	Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
PPP-B-585	-	Boxes, Wood, Wirebound.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-636	-	Box, Fiberboard.
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-B-1055	-	Barrier Material, Waterproofed, Flexible.
PPP-C-650	-	Crates, Wood, Open and Covered.

Federal Standards:

Fed. Std. No. 123	-	Marking for Domestic Shipment (Civilian Agencies).
Fed. Std. No. 751	-	Stitches, Seams, and Stitchings.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C., 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-W-6110	-	Wood; Determination of Moisture Content of.
MIL-G-16491	-	Grommet, Metallic.
MIL-P-22748	-	Plastic, Polyethylene and Copolymers, High Density, Molding and Extrusion Material.

Military Standards:

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	-	Marking for Shipment and Storage.
MIL-STD-130	-	Identification Marking of U. S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Uniform Classification Committee:
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, 202 Union Station, 516 West Jackson Boulevard, Chicago, Ill., 60606.)

American Trucking Association, Inc.:
National Motor Freight Classification Rules

(Application for copies should be addressed to the American Trucking Association, Inc., 1616 P Street, N.W., Washington, D. C., 20036.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample basket or liner covered by this specification, shall be made available to the contracting officer or his authorized representative for approval in accordance with 4.2. The approval of the preproduction sample authorizes the commencement of production but does not relieve the supplier of responsibility for compliance with all applicable provisions of this specification. The preproduction sample shall be manufactured in the same facilities to be used for the manufacture of the production items.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

3.2 Materials. Materials not definitely specified shall be of the quality and type normally used for the purpose in commercial practice. All materials shall be new and unused.

3.2.1 Cloth, cotton duck. The cotton duck cloth shall conform to type I, No. 4, hard or medium texture of CCC-C-419.

3.2.2 Thread.

3.2.2.1 Thread, cotton. The cotton thread for general seaming and hemming shall be unbleached conforming to type IIIA or IIIB, ticket number 10, 5-ply of V-T-276. The thread for overedge stitching shall conform to ticket number 24, 4-ply, type IA1 of V-T-276.

3.2.2.2 Thread, nylon. The nylon thread shall be natural white, and shall conform to type I or II, class 1 of V-T-295. Size 3 shall be used for general seaming and hemming. Size E shall be used for overedge stitching.

3.2.2.3 Thread, polyester. The polyester thread shall be natural white, and shall conform to type I or II, class 1 (subclass A) of V-T-285. Size 3 shall be used for general seaming and hemming. Size E shall be used for overedge stitching.

3.2.3 Cord, cotton. The cotton cord shall conform to type I, class 1 or 2, size 6 of T-C-571.

3.2.4 Wood. The wood shall be hard maple, birch, beech, or oak.

3.2.5 Steel.

3.2.5.1 Sheet or strip steel. Sheet or strip steel shall conform to hot or cold rolled, commercial quality of QQ-S-698.

3.2.5.2 Spring-steel wire. Spring-steel wire shall conform to type II of QQ-W-428, except the wire shall have a minimum tensile strength of 140,000 pounds per square inch (p.s.i.).

3.2.6 Rivets.

3.2.6.1 Rivets for use in the cloth liner and handle. Rivets for use in the cloth liner or handle shall conform to type XI, class 1, grade E, or type XII, class 1, grade F, or class 3, grade A, and shall be of deep-drilled design in accordance with FF-R-556. The length of rivets and size of washers shall permit a tight fit. The cloth shall be tightly clinched without

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

tearing, and when rivets are peened, they shall be free of ragged edges. The rivets and washers, when fabricated of steel, shall be cadmium plated.

3.2.6.2 Rivets for use with steel, wood, or a combination of steel and wood member. Rivets for use with steel, wood, or a combination of steel and wood members shall be annealed and shall conform to either type VI, grade E or type XII, class 1, grade E in accordance with FF-R-556, except that the shank diameter shall be not less than 3/16 inch. The length of the rivets shall permit a tight fit, and shall be free from ragged edges after peening. The rivets shall be cadmium plated.

3.2.7 Grommets. Grommets shall conform to type I, class 1, size 2 or 5, as applicable, in accordance with MIL-G-16491.

3.2.8 Stencil ink and stencil paint.

3.2.8.1 Stencil ink. Stencil ink shall be black, waterproof ink conforming to TT-I-542.

3.2.8.2 Stencil paint. Stencil paint shall be black conforming to TT-P-98.

3.2.9 Polyethylene. The material for the plastic liners shall be polyethylene conforming to class A, grade 4 or 6 of MIL-P-22748. The plastic shall be unpigmented (natural) or suitably pigmented to meet the color requirement of the finished liner.

3.3 Illustrations. The figures shown herein are for the purpose of illustration only and are not intended to preclude the purchase of baskets otherwise conforming to this specification.

3.4 Design and construction. The liners shall be designed in accordance with table I and applicable figures. Figures 1 through 8 show frames with removable cloth liners only; figure 9 shows a frame with nonremovable cloth liners; and figure 10 shows a plastic liner. When specified (see 6.2), cloth liners only, plastic liners only, or frame only shall be furnished. When either cloth or plastic liners only are furnished, the liners shall be fitted to a frame and examined for closeness of fit. The liners shall be designed to fit the frame dimensions specified in table I. The wood components at time of assembly shall have a moisture content that does not exceed 15 percent when tested as specified in 4.3.2.1, and a slope of grain that does not exceed one inch in ten when tested as specified in 4.4.1. The wood components shall be dressed on all four sides and shall be free from decay, holes larger than pinholes, pitch pockets, loose knots, sound tight knots over 1/2 inch diameter, larvae channel, shake, through split, honeycomb, warp, and brashness. Knots shall not occur at the edge of any component. The following defects in wood components shall be permitted: mineral streaks, medium stain, scattered sound burls, and surface checks not over two inches in length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE I. Frame, cloth or plastic liner sizes, dimensions, capacities, types, and construction

Sizes	Frame dimensions (inches) (inside) ± 1/2			Approximate capacity (bushels)	Skids or casters	Applicable type	Construction methods
	Length 1/	Width 1/	Depth				
1	34	24	22	8	Skids	II	A, B, or C
2	34	22	23	8	Casters	I	A, B, C, or D
						II	D
3	36	24	25	10	Casters	I, II	A, B, C, D
4	36	26	27-1/2	12	Casters	I, II	A, B, C, D
5	40	28	30	16	Casters	I, II	A, B, C, D
6	42	30	30	18	Casters	I	A, B, C, D
						II	D

1/ Length and width are at frame top rail. Bottoms shall measure 2-1/2 ± 1/4 inch less in length and width than at the top.

3.4.1 Construction methods.

(a) Construction A. Construction "A" shall consist of hardwood skids, hardwood battens, caster boards when required, and metal braces positioned as shown on figures 1 and 2.

(b) Construction B. Construction "B" shall consist of hardwood skids, caster boards when required, longitudinal and transverse steel strips, and metal braces positioned as shown on figures 3, 4, and 5.

(c) Construction C. Construction "C" shall consist of hardwood skids, caster boards when required, and either a combination of steel strips and transverse hardwood battens, as shown on figure 6, or longitudinal and transverse steel strips as shown on figure 7. Both methods shall have metal braces as shown on figures 6 and 7.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

(d) Construction D. Construction "D" shall consist of a steel angle bottom with transverse steel strips and metal braces positioned as shown on figures 8 and 9. Sizes 2, 3, and 4 shall have a 5 inch wide transverse strip in the center (see figure 13). Sizes 5 and 6 shall have a 6 inch wide transverse strip in the center and in addition shall have a 5 inch wide longitudinal strip bolted on with end casters (see figure 14). The frames, regardless of size, shall not rock on the caster.

3.4.2 Welding. Welding shall be accomplished by arc, gas, or resistance-welding.

3.4.3 Riveting of structural members. Rivets securing the structural bottom members to the skids in construction A, B, or C, shall have the top of the heads recessed below the bottom surface of the skids a minimum of 1/8 inch. Holes shall be drilled in the wood members and the steel strips to permit a tight fit without deformation of the rivet.

3.4.4 Stitching. All stitching shall be accomplished with stitch type 301 having 4 to 6 stitches per inch, except overedge stitching shall be accomplished with stitch type 502, 503, or 504 having 12 to 14 stitches for cotton thread and 14 to 16 stitches per inch for synthetic thread. All stitch types shall be in accordance with Fed. Std. No. 751. The thread shall be as specified in 3.2.2.1, 3.2.2.2, or 3.2.2.3 at the option of the manufacturer.

3.4.5 Frames. The frame shall consist of the rim (top or rail), corner verticals, side and end braces and shall be fabricated from steel wire specified in 3.2.5.2 and bottoms with either skids or caster boards.

3.4.5.1 Rim. The rim for all sizes shall be formed from not less than 11/32 inch nominal diameter wire and from not more than 2 pieces of wire. The wire ends shall be butt-welded by the gas, arc, or resistance-welding method. If the gas or arc method of welding is used, a reinforcing sleeve normally used by the industry shall be slipped centrally over the butt weld and the complete circumference of both ends of the sleeve shall be welded to the top rail. If braces are to be cold bent around the top rail, the top rail shall be downset at the points of contact to insure that the braces shall extend not more than 5/16 inch beyond the top surface of the top rail.

3.4.5.2 Corner verticals and side and end braces. Corner verticals and side and end braces for frames in sizes 1, 2, 3, and 4 shall be formed from a minimum of 5/16 inch nominal diameter wire. Corner verticals and side and end braces for frames in sizes 5 and 6 shall be formed from wire with a diameter not less than 11/32 inch. The braces shall be fabricated from one piece of wire and shall be cold bent around or welded to the rim. The braces and corner verticals in construction D shall be welded at the bottom on the inside edges of the steel bottom.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

The welding shall be accomplished, at the option of the manufacturer, in accordance with alternate methods 1, 2, or 3, as shown on figure 15. When alternate method No. 2 is used, the minimum length of the weld shall be equal to or exceeding three wire diameters.

3.4.5.3 Bottoms. The bottoms shall be fabricated of hardwood battens, or steel strips, or a combination of both for skids, as applicable, for construction A, B, and C, or from steel angles and steel strips without skids for construction D.

3.4.5.3.1 Wood battens. The wood battens, when used, shall be fabricated of wood specified in 3.2.4, and shall be not less than 3/8-inch thick by 2-3/4-inches in width and shall not extend beyond the frame edge. The battens shall be placed transversely across the bottom over the wire braces, and riveted to the skids with two rivets, specified in 3.2.6.2, at each intersection as shown on figures 1, 2, and 6.

3.4.5.3.2 Steel strips for construction B and C. The steel strips shall be fabricated from strip specified in 3.2.5.1 and shall be not less than 0.0897 (13 gage) inch thick by 1-inch wide. The strips shall not extend beyond the frame edge.

3.4.5.3.2.1 Transverse strips. The transverse steel strips shall be placed over the wire braces and riveted at each intersection of the skids and strips with a minimum of one rivet specified in 3.2.6.2. The steel strips shall be attached to the U-shape braces by the return-bend method as shown on figures 3, 4, and 5, for construction method B. The steel strips used in construction method C shall be riveted to skids as shown on figures 6 and 7.

3.4.5.3.2.2 Longitudinal strips. The longitudinal steel strips shall be riveted to transverse strips and the skids with rivets specified in 3.2.6.2, as shown on figures 3 through 7. All steel strip members shall be riveted or welded together at inside intersections.

3.4.5.3.3 Steel angles and strips for construction D.

3.4.5.3.3.1 Steel angles. The steel angles for the bottom shall be fabricated of steel specified in 3.2.5.1, and shall be made of not more than two pieces. The flanges of the angle shall be not less than 1-1/8 inches and not less than 0.1046 (12 gage) inch thick. The ends of the steel angles shall be butt-welded the entire length of the joint. The four corners of the steel angle bottom shall be rounded.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

3.4.5.3.3.2 Transverse steel strips for construction D. The transverse strips shall be fabricated of steel specified in 3.2.5.1. The strips shall be not less than 0.1046 (12 gage) inch thick by 2-1/4 inches in width. The length shall be 1/4 inch less than the inside width of the angle frame, and located equidistantly from legs of angles. The center transverse strips shall conform to 3.4.1.4. The steel shall be as specified in 3.2.5.1, not less than 0.1046 (12 gage) inch thick. The narrower transverse strips shall be equidistantly located from both steel angle ends as shown on figures 8 and 9. The transverse strips shall be welded to inside surface of angle steel.

3.4.5.3.3.3 Longitudinal steel strips. The longitudinal strips for sizes 5 and 6 (see 3.4.1 d) shall be fabricated of steel specified in 3.2.5.1, not less than 0.1046 (12 gage) inch. The longitudinal strip shall not extend beyond ends of the frame by more than 1/16 inch.

3.4.5.4 Skids. The skids used on frames, constructions A, B, and C shall be fabricated of wood specified in 3.2.4. The skids, when necessary, shall be grooved longitudinally and transversely to insure that the bottoms of the skids lie in the same plane. The skids shall be at least 1-3/4 inches wide by 15/16 inch thick, and shall be 1-1/4 $\pm$ 1/4 inch less than the frame length. When skids are used as caster boards for construction A, the skids shall be at least 3-1/2 inches wide by 3/4 inch thick. The frames shall be furnished with three skids, except frame construction C, types I and II, sizes 5 and 6 shall be furnished with a minimum of four skids as shown on figure 7.

3.4.5.5 Casters. When applicable (see table I), each frame mounted basket shall have four casters of the same wheel diameter. When specified (see 6.2), the swivel casters may be furnished with a smaller wheel diameter. Rigid casters shall be mounted on each side and swivel casters shall be center mounted on each end. The casters shall be mounted on the caster boards, skids, or steel bottoms (see figures 11, 12, 13, and 14) as applicable, without overhang. Casters for frames sizes 2, 3, and 4 shall have a minimum wheel diameter of 3-1/2 inches and a minimum wheel tread width of 1-1/8 inches. The rated capacity shall be not less than 150 pounds each. Casters for frames sizes 5 and 6 shall have a minimum wheel diameter of 4 inches and a minimum wheel tread width of 1-1/8 inches. The rated capacity shall be not less than 175 pounds each. Wheel shall be either all molded rubber with soft rubber tread bonded to a hard core or a steel side plate construction with replaceable soft rubber tires or the wheel shall be an all molded composition with hard tread. All wheels shall be ball or roller bearing type. The swivel casters shall have hardened ball bearings operating on hardened contact bearing raceway(s) surfaces, permitting casters to swivel under load with all forces effectively transmitted through the ball bearings.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

3.4.5.6 Caster boards.

3.4.5.6.1 Caster boards for construction A. When casters are required for frame construction A (see figure 11), the skids shall be used for caster boards with dimensions specified in 3.4.5.4, or at the option of the manufacturer, caster boards may be fastened directly onto the skids.

3.4.5.6.2 Caster boards for construction B and C. When casters are required for frame constructions B and C, the frames shall have three transverse boards bolted to the bottom of the skids for attachment of the casters (see figure 12). The caster boards shall be fabricated of wood specified in 3.2.4, and be a minimum of 5-1/2 inches in width by 3/4 inch in thickness. The caster board shall extend the full width of the frame bottom.

3.4.5.7 Caster assembly for sizes 2, 3, 4, 5, and 6, construction D. Casters shall be assembled with either bolts, nuts, and lockwashers or locknuts to frame bottom and transverse steel strips as shown in figure 13, except that sizes 5 and 6 shall have casters mounted to the longitudinal strip as shown on figure 14.

3.4.6 Cloth liner. The cloth liner shall be fabricated from cotton duck cloth specified in 3.2.1.

3.4.6.1 Nonremovable cloth liner. The nonremovable cloth liner shall be made of three pieces of cotton duck cloth sewed together. The three pieces shall consist of two end pieces and one piece forming the sides and bottom. The bottom part shall overlap the outside of the end pieces by at least 1 inch. All raw edges shall be turned under or overedged stitched to prevent fraying on exposed raw edges. Two parallel rows of stitching, 3/4 inch apart shall be used to sew the bottom part to the ends. That portion of the side and bottom piece that forms the basket sides shall be on the outside, and overlap the ends by at least 1-1/4 inches at the top and 3 inches at the bottom. The two end pieces shall be sewed to the sides with at least two rows of stitching approximately 3/4 inch apart at the top, angling out for a spacing of approximately 2-3/4 inches apart at the bottom. The top edges of the liner shall be folded over the top rim of the frame at least 1-3/8 inches, the raw edge turned under or overedged stitched, forming a hem completely around the top rim. The vertical frame members shall be covered to within 3 inches of the bottom of the frame with cotton duck strips sufficiently wide to cover vertical frame members and permit stitching. The upper ends of these strips shall be hidden under the top hem. These strips shall be of the same weight material as the liner cloth. The ends of each vertical row of stitching shall be securely backstitched, cross-stitched, and riveted for reinforcement. The fold of the liner corners shall form a pocket for the vertical-corner frame members. The top rim shall be reinforced with cotton-duck cloth binding, specified in 3.2.1, at least 2-1/2 inches wide. The binding shall be folded over the top rail with raw edges turned under an equal amount on each side,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

and shall be riveted and stitched in place, or binding of leather at least 2-1/2 inches wide shall be used around the perimeter of the rim and over the top rail with an equal amount on both sides in accordance with commercial practice. Each end of the liner shall be punched with either two slits or two holes, as required by the method of handle attachment. When the handle is to be riveted down upon itself (see 3.4.6.1.1), the slits shall be used. When the handle is to be positioned parallel to the rim and fastened to the body (see 3.4.6.1.1), the holes, reinforced with size 5 grommets as specified in 3.2.7, shall be used. The slits or holes shall be spaced 4-3/4 inches apart about the centerline of the liner.

3.4.6.1.1 Handle. A handle made of cotton duck cloth shall be located in each end of the cloth liner directly under the top rail. The cotton duck cloth, when cut for each handle, shall be not less than 3-7/8 inches by 16 inches. The piece of cotton duck cloth, thus formed, shall then be folded in the center and the raw edges shall be turned under 1/2 inch. The finished handle shall be not less than 1 inch wide. The turned-under edges shall be held down by stitching and another row of stitching shall be 3/8 inch from the folded edge. The handles shall be fastened to the liner by inserting the ends through the slits, causing the bight of the handle to appear on the outside of the basket. Two inches of the handle shall protrude through each slit, shall be bent around the top rail, and riveted down upon itself with not less than four rivets of the type specified in 3.2.6.1. When grommets are used in place of the slits, at the specified location, the handles shall be fastened by inserting two inches of each handle end through each grommet. Each end shall be folded back parallel to the rim towards the corners, and riveted in place with four rivets, specified in 3.2.6.1. The heads of the rivets shall be on the inside of the basket. The washers shall be on the outside. The rivets shall be peened over the washers.

3.4.6.2 Removable cotton basket liners. Removable cotton basket liners shall be fabricated in the same manner as specified in 3.4.6.1, except that no handles, cotton duck rim binding, vertical frame covering strips or leather binding are required. The top edges shall be overedge stitched and turned back at least 4 inches and stitched down close to the edge with one row of stitching. The overedge stitching shall be as specified in 3.4.4. The hem shall be provided with two horizontal rows of size 2 grommets specified in 3.2.7. The top row shall be 1 inch from the upper edge and the bottom row shall be 3-1/2 inches from the upper edge. These measurements are to the center of the grommets. Each grommet in the bottom row shall be located directly under the one in the top row so that the grommets will come opposite when the reinforcement is folded over the top rail of the frame. This will permit the cotton cord to be passed through. A total of not less than six grommets in each row on each side and not less than four in each row at each end making a total of not less than 40 grommets per basket, shall be supplied. The vertical pairs

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

shall be evenly spaced horizontally except that they shall always be 3 inches from each side of the basket corners. The reinforced upper edge of the liner shall be split at each corner the width of the hem, allowing a neater fit when the liner is laced to the frame. The cotton cord, specified in 3.2.3, shall be cut 3 feet longer than the outside perimeter around the top of the frame.

3.4.6.3 Plastic liners. The translucent white liners, fabricated from polyethylene material specified in 3.2.9, shall be of seamless, one-piece construction as shown in figure 10 and shall be steam cleanable. The corners and edges shall be rounded and the top rim shall be rolled so that it curves outward and extends over the edges of the frame when the liner is inserted. The thickness of the sides and bottom of the liner shall be 0.125 inch with a minus tolerance of 0.005 inch. Readings shall be taken as specified in 4.3.3.2.1 to indicate conformance with above requirements.

3.5 Finish.

3.5.1 Type I frame. After complete fabrication and prior to assembly of the wooden members, the steel components for the type I frames shall be given an electrodeposited plating of zinc, or, at the option of the manufacturer, hot dipped galvanized zinc, or electrodeposited cadmium plating. At the option of the manufacturer, zinc or cadmium plating may be accomplished prior to assembly of the metal components. Areas affected by subsequent welding shall be retouched with zinc or cadmium as applicable in accordance with commercial practice. The zinc plating shall be in accordance with type II, class 2 of QQ-Z-325. The cadmium plating shall be in accordance with class 1, type II of QQ-P-416. The hot dipped galvanized zinc coating shall be in accordance with commercial practice. The finish shall adhere, e.g., shall not blister, peel, or flake and shall not have foreign matter, scratches, scuffs, or bare metal. The finish shall be smooth, fine grained, and shall completely cover the steel.

3.5.2 Type II frames.

3.5.2.1 Pretreatment. All frame metal components shall be clean and free from all foreign matter, rough, and sharp edges. Pretreatment shall be in accordance with industry's normal practice.

3.5.2.2 Enameling. Inner and outer surfaces of the bottom of construction D frame metal components after pretreatment shall be given a full hiding coat of enamel, that will inhibit rust and corrosion during basket's normal use. The

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

color of the enamel shall be olive drab. Prior to assembly of the basket to the frame, the enameled surfaces shall be dry to touch and free from sags, excessive hard runs, and soft runs.

3.6 Marking. Unless otherwise specified (see 6.2), the basket liners shall be stenciled with the letters "U.S." in characters not less than 1-1/2 inches high, and the name of the manufacturer and the year of manufacture in characters not less than 3/4 inch high in accordance with MIL-STD-130. All stenciling shall be accomplished with ink specified in 3.2.8.1 or with stencil paint specified in 3.2.8.2.

3.6.1 Location of marking. The letters "U.S." shall appear in two places on the basket liners, i.e., on each side, and shall be equidistant from each end and 6 inches from the top edge of the basket.

3.7 Workmanship. Welds shall be sound, smooth, and free from burned or reduced areas. Welds shall show no sign of checks or other signs of failure. Rivets, where peened or clinched, shall be free from burrs or ragged edges. Stitching and seams shall be clean and even and shall have no loose threads. Wood shall be free of splinters, cracks, and splits, and edges shall be rounded.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. When preproduction sample is required, it shall be examined for the defects in tables III, IV, and V, and specified dimensions, as applicable.

4.3 Sampling for inspection. Sampling for inspection shall be made in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.3.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

4.3.2 Intermediate inspection.

4.3.2.1 Intermediate testing for moisture content and slope of grain. Tests shall be performed on battens, caster boards, and skids prior to assembly to determine conformance to table II. The lot shall be all wood components, after dressing all four sides, that are submitted for inspection at one time. The sample unit shall be one component of each kind. The inspection level shall be S-1 with an acceptable quality level (AQL) of 6.5 defects, expressed in terms of defects per hundred units.

TABLE II. Component tests

Components expressed in terms of	Characteristic	Requirement par.	Test method	No. determinations per sample unit	Results reported as
Battens, skids, and caster boards (as applicable)	Moisture content	3.3	MIL-W-6110	3	Average of 3 determinations per sample unit to nearest 0.1 percent.
	Slope of grain	3.3	4.4.1	1	Pass or fail.

4.3.2.2 Visual examination of frames. The frames prior to assembly with the liners shall be examined for defects in table III. The lot shall be all frames of one type and size submitted for inspection at one time. The sample unit shall be one frame. The inspection level shall be level I with AQLs of 2.5 for major, 10.0 for major and minor "A" combined, and 25.0 for total, expressed in terms of defects per hundred units.

TABLE III. Classification of defects for visual examination of frames

Examine	Defect	Major	Minor	
			A	B
Finish (general)	Not finished.....	X		
	Not as specified, i.e., type I frame is not zinc or cadmium plated or type II frame is not enameled.....	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for visual examination of frames (cont'd)

Examine	Defect	Major	Minor A	Minor B
Finish (general) (cont'd)	Not adherent, e.g., is blistered, peeled, or flaked.	X		
	Foreign matter imbedded.		X	
Plating	Not smooth or not fine-grained.		X	
	Pitted or contains nodules.		X	
	Indication of burning.		X	
	Evidence of rust or corrosion.		X	
	Area of bare metal, i.e., not plated or plating removed by scratch, dig, scuff, or abrasion.		X	
Enameling	Not smooth, not uniform or not continuous, e.g., bare metal showing.		X	
	Soft run.		X	
	Excessive hard runs.		X	
	Scratch, scuff, abrasion, or dig, exposing bare metal.		X	
	Not a close match to specified color.		X	
	Not dry, e.g., is tacky to touch.		X	
Construction and workmanship:				
Wooden components	Not dressed on four sides.		X	
	Larvae channel, decay, rot, or pitch pocket.			X
	Shake or brashness.			X
	Split or honeycomb.			X
	Hole (except pinhole), loose knots.			X
	Warp.			X
	Any knot at the edge of any component.			X
	Ends of batten extend beyond outside edge of longitudinal member.			X
	Less than the specified number of members.	X		
	Wood not grooved to accommodate the U-frames (when required): grooves affect the fit of members, U-frames, and battens.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for visual examination of frames (cont'd)

Examine	Defect	Major	Minor A	Minor B
Construction and workmanship (cont'd)				
Casters	Not specified type, e.g., not rigid or swivel type as required.....	X		
	Not mounted as specified, or not located where specified, e.g., rigid caster mounted on the end or swivel caster mounted on side.....		X	
	Caster does not swivel when required, or wheel binds, i.e., does not roll freely when in use under no load.....		X	
	Casters (wheels) not uniform in size (when specified).....	X		
Rivets and riveting	Riveting results in sharp edge or sliver.....	X		
	Broken or damaged.....		X	
	Not peened or insufficiently peened.....		X	
	Rivet not inserted as specified.....			X
	Rivet missing.....		X	
Assembly	Not connected or joined as specified....	X		
	Top rail formed of more than two pieces.....		X	
	Reinforcing sleeve missing or misplaced (where required).....		X	
	Reinforcing sleeve not welded around circumference of ends.....		X	
	Top rail not downset at juncture with U-shaped braces (where required).....		X	
	U-brace fabricated of more than one piece.....			X
	Construction A or C frame U-brace not recessed below the top surface of the wood skid.....		X	
	Any steel strip too long, e.g., projects beyond edge of frame.....			X
	Sharp edge or splinter on frame.....	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE III. Classification of defects for visual examination of frames (cont'd)

Examine	Defect	Major	Minor A	Minor B
Construction and workmanship (cont'd)				
Welds and welding	Any weld missing, completely broken, or not fused.....	X		
	Welds not specified type.....		X	
	Cracked, unsound, burnt through, or fractured.....	X		

4.3.2.3 Dimensional examination. Prior to assembling liners to frames, the frames shall be examined for specified dimensions. Any dimension not within the specified tolerance shall be classified as a defect. The lot shall be all frames of one type and construction submitted for examination at one time. The sample unit shall be one frame. The inspection level shall be S-3 with an AQL of 10.0, expressed in terms of defects per hundred units.

4.3.3 End item inspection. The lot shall be all baskets of one size for a type I frame or a type II frame and liner completely assembled or all cloth or plastic liners of one size, as applicable, submitted for inspection at one time. The sample unit shall be one cloth liner, one completely assembled basket with frame, or one plastic liner, as applicable.

4.3.3.1 Visual examination.

4.3.3.1.1 Cloth basket liners. Examination shall be made of the cloth liners for defects in table IV. The inspection level shall be level II with AQLs of 4.0 for major, 10.0 for major and minor "A" combined, and 25.0 for total, expressed in terms of defects per hundred units.

TABLE IV. Classification of defects for visual examination of cloth liners

Examine	Defect	Major	Minor A	Minor B
Raw edges	Any raw edge not turned under.....			X
	Raw edges not securely caught in stitching.....		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for visual examination of cloth liners (cont'd)

Examine	Defect	Major	Minor	
			A	B
Seams and stitching	Wrong seam or stitch type.....	X		
	Thread breaks not backstitched.....			X
	One stitch less than minimum specified....			X
	Two or more stitches less than minimum specified.....		X	
	One or more stitches in excess of maximum specified.....			X
	Open seams.....			X
	Runoffs.....			X
	Note: Variation in the number of stitches per inch caused by operator's speeding up the machine and pulling the cloth in order to sew over heavy seams or heavy places or in turning corners, shall be classified as follows: (a) Within the minor B defect classification - no defect. (b) Within the minor A defect classification - minor B defect.			
Body (general)	Note: Removable cotton duck liner shall be fitted to the frame to perform visual inspection.			
	Liner does not fit frame evenly.....	X		
	Sides and bottom formed with more than one piece of cloth.....		X	
	End formed with more than one piece of cloth.....		X	
	Bottom or side overlap not as specified..		X	
Removable cloth liner for type I frame)	Turnback not as specified.....			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE IV. Classification of defects for visual examination of cloth liners (cont'd)

Examine	Defect	Major	Minor A	Minor B
Grommets (type II)	Handle grommet missing, when applicable..	X		
Grommets (type I)	Number of grommets less than specified; any of grommets misplaced so that the cotton cord cannot be threaded through each pair of grommets.....		X	
Cotton lace cord (type I)	Cord does not permit tying.....	X		
Vertical strips (type II)	Missing.....		X	
	Not reinforced with leather or cotton duck.....		X	
	Top end of strip not caught in top hem.....		X	
Top rim (type II)	Not reinforced along entire perimeter, with leather or cotton duck.....		X	
Handles (type II)	Not securely riveted, or ends of handle not fastened around top rail or folded back as applicable.....	X		
	Set off center of ends of basket.....			X
	Not formed as specified.....	X		
Marking	Omitted, incorrect, illegible, or misplaced.....			X
Cleanness	Noticeable grease or oil stains; thread ends not trimmed throughout.....			X

4.3.3.1.2 Plastic liners. Examination shall be made of the plastic liners for defects listed in table V. The inspection level shall be level I with an AQL of 4.0 (one class).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

TABLE V. Classification of defects for visual examination of plastic liners

Examine	Defect	Major	Minor
Design and construction	Any design or construction characteristic not in accordance with specified requirements or approved sample.....	X	
	Note: Liner shall be fitted to frame to perform visual examination.		
	Liner does not fit frame evenly.....	X	
Color	Color not as specified.....		X
	Color not uniform.....		X
	Interior and exterior surface not smooth..		X
	Any cut, tear, hole crack, burn, lump, blister or mend in liner.....	X	
	Any sharp or rough edge.....		X
	Any imbedded dirt or foreign material.....		X
	Any surface dirt which cannot be removed with soap and water.....		X
	Any soft area.....	X	
	Evidence thin area.....	X	

4.3.3.2 Dimensional examination. Inspection of the plastic liners shall be made of the end item to determine compliance with dimensions specified in table I. Any dimensions not as specified shall be classified as a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

4.3.3.2.1 Thickness examination of plastic liner. Five thickness readings shall be taken from the sides and bottom areas of the liner to determine conformance with the requirements specified in 3.4.6.3.

4.3.4 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking requirements of section 5 are complied with. Defects shall be as indicated in table VI. The lot shall be the number of shipping containers offered for delivery at one time. The sample unit shall be one shipping container fully prepared for delivery with the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

exception that it need not be sealed. Defects of closure shall be examined on shipping containers fully prepared for delivery. The inspection level shall be S-2 with an AQL of 2.5, expressed in terms of defects per hundred units. Examination for closure and strapping shall be in accordance with the applicable box specification.

TABLE VI. Examination of packaging, packing, and marking

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Component missing or damaged.
Workmanship	Cloth basket liner on type I not disassembled and not neatly and compactly folded. Seam or joint (barrier material) overlaps less than 4 inches. Frames not nested and strapped. Contents not anchored as required. Crate not constructed or not nailed and strapped as specified.
Content	More or less than required.

4.4 Test.

4.4.1 Slope of wood grain. The slope of grain shall be determined by combining the grain direction of two adjacent faces of a square or rectangular piece. When one of these faces is straight grained, the true slope of grain is shown on the other face. When there is a slope on both faces, the true or combined slope is greater than the slope on either face. Slope of grain is shown on edge-grained faces by summer-wood bands, by the direction in which a free-flowing ink or dye spreads, by the course taken by a narrow strip lifted by a knife point and torn out. Direction of fiber may also be measured by the Teco slope-grain detector or equal (see 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Type I basket with removable cloth liner. Each type I cloth basket liner shall be disassembled from its frame (except, see 5.2.2.1), the lace cord replaced through one grommet of the basket and the basket neatly and compactly folded. Six folded basket liners of one size only shall be wrapped in two thicknesses of waterproof barrier material conforming to class L-2 (b) or M-1 of PPP-B-1055. All seams and joints shall overlap a minimum of four inches. The six matching frames shall be nested into one another. The wrapped bundle shall be securely strapped to the bottom of the top nested frame with flat steel strapping, minimum 1/2-inch by 0.020-inch, conforming to type I, class B, grade 2 of QQ-S-781.

5.1.1.2 Type I basket with removable plastic liner. The plastic liner shall be removed from each type I basket and six liners shall be nested into one another. Six frames shall be nested into one another, and the six nested plastic liners shall then be inserted into the uppermost frame.

5.1.1.3 Type II basket with nonremovable cloth liner. Six type II baskets of one size only shall be nested into one another. Prior to nesting, the casters shall be covered with a piece of burlap-backed jute felt approximately 1/2-inch thick and not less than 4-inches wide. The ends of each piece of felt shall be securely fastened to the caster frame with a suitable wire or twine. The casters on the bottom basket shall be left uncovered.

5.1.2 Level C. Baskets shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice, when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C, as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I basket with removable cloth basket liners. Six liners of one size only, packaged as specified in 5.1, shall be packed in a crate or cleated plywood shipping container conforming to type I, style A of PPP-C-650, except that height dimensional limitations shall be waived, or overseas type, type 3 load of PPP-B-601. Containers containing baskets with casters shall have additional members added to the bottom of the container in such a manner as to

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

provide clearance between the casters and bottom of the container. Anchoring of contents shall be in accordance with the appendix of PPP-C-650. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.1.2 Type I basket with plastic liner or type II basket with nonremovable cloth liner. Six baskets of one type and size only, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that the shipping container shall conform to overseas type, type 3 load of PPP-B-601.

5.2.1.3 Frames (when procured as a separate item). Six frames of one size only, shall be nested within one another and packed as specified in 5.2.1.1.

5.2.1.4 Cloth liners (when procured as a separate item). Twelve cloth liners of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, V2s of PPP-B-636. Each shipping container shall be closed and reinforced with flat strapping or tape banding in accordance with the appendix of PPP-B-636.

5.2.1.5 Plastic liners (when procured as a separate item). Twelve plastic liners of one size only shall be nested and packed in a snug-fitting shipping container conforming to overseas type of PPP-B-601. Inner packing form(s) shall be positioned inside the nested liners and shall be of such length, width, and depth to prevent the liner from collapsing. Closure and reinforcing with flat strapping or tape banding shall be in accordance with the appendix of PPP-B-601.

5.2.2 Level B.

5.2.2.1 Type I basket with removable cloth liner or type II basket with nonremovable cloth liner. Six baskets of one type or size only, with cloth liner in place, shall be nested and securely bound with two flat steel straps, minimum 1/2-inch by 0.020-inch, conforming to type I, class A, grade 2 of QQ-S-781. One strap shall be approximately centered and shall pass over the top of the top basket and down the side and between the wood skids and the steel bottom rods of the bottom basket. Alternatively when baskets are equipped with casters, the strap may pass under the wood skids or bottom of the basket. The other strap shall be approximately centered and shall pass over the top of the top basket and down the end and underneath the crosswise member of the bottom basket. Prior to nesting of the baskets, the casters shall be covered as specified in 5.1.1.2. The casters on the bottom basket shall be left uncovered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

5.2.2.2 Type I basket with plastic liner. Six baskets of one size only, packaged as specified in 5.1, shall be packed as specified in 5.2.1.1, except that shipping containers shall conform to type I, style B of PPP-C-650; domestic type, style A or B of PPP-B-601; or style 1 or 2, class 1, type 3 load of PPP-B-585.

5.2.2.3 Frames (when procured as a separate item). Six frames of one size only shall be nested within one another and securely tied together with flat steel strapping as specified in 5.2.2.1, except that the straps shall pass over the bottom of the top frame.

5.2.2.4 Cloth basket liner (when procured as a separate item). Twelve cloth liners of one size only, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF, variety SW, or type SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with method II of the appendix of PPP-B-636.

5.2.2.5 Plastic liners (when procured as a separate item). Twelve plastic liners of one size only, shall be nested and packed in a snug-fitting shipping container conforming to class 1, style E of PPP-B-640, or domestic type, style A or B of PPP-B-601. Inner packing form(s) shall be positioned inside the nested liners and shall be of such length, width, and depth to prevent the wall of the liner from collapsing. Shipping containers shall be closed and reinforced in accordance with the appendix of the applicable container specification.

5.2.3 Level C. Baskets, packaged as specified in 5.1, and cloth and plastic liners, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers and packing shall comply with Uniform Freight Classification Rules or National Motor Freight Classification Rules.

5.3 Marking.

5.3.1 Civil agencies. In addition to any special marking required by the contract or order, strapped baskets, liners, and frames, interior packages, and shipping containers shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the contract or order, strapped baskets, liners, and frames, interior packages, and shipping containers shall be marked in accordance with MIL-STD-129.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. Baskets, frames, and liners covered by this specification are intended to be used for transporting clothing, textiles, or bundles throughout the using establishment.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type required (see 1.2.1).
(c) Size required (see 1.2.2).
(d) When the preproduction sample is not required (see 3.1).
(e) When cloth liners only or plastic liners only are required (see 3.4).
(f) When frames only are required (see 3.4).
(g) When smaller size swivel casters are required (see 3.4.5.5).
(h) When marking is other than specified (see 3.6).
(i) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.3 The Teco slope grain detector specified in 4.4.1 may be obtained from the Timber Engineering Company, Inc., Washington, D. C.

6.4 Civil agency procurement. When level B packaging is specified for civil agency procurement, the requirements in 5.1.1 shall apply.

CUSTODIANS:

Army - GL
Navy - YD
Air Force - 84

Review activities:

Navy - YD
Air Force - 84, 85

User activities:

Navy - SA, MC


Preparing activity:

Army - GL

CIVIL AGENCIES INTEREST:


AGR
COM-NBS
GSA
JUS
JUS-FPI
PO
VA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

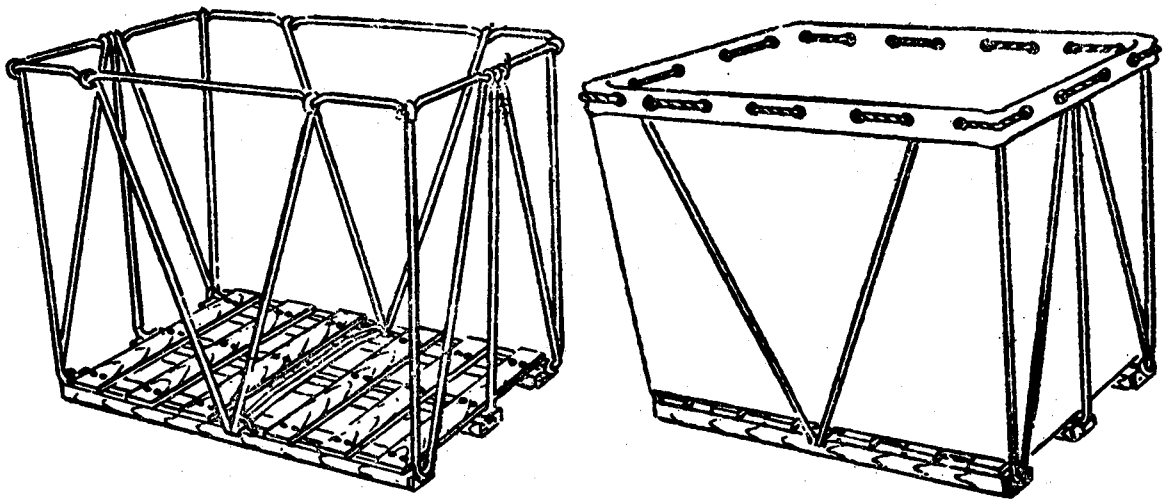

FRAME COMPLETE


FIGURE 1. Sizes 2,3, and 4, type I and sizes 1, 3, and 4, type II, construction A. (If casters are specified, see figure 11 for detail.)

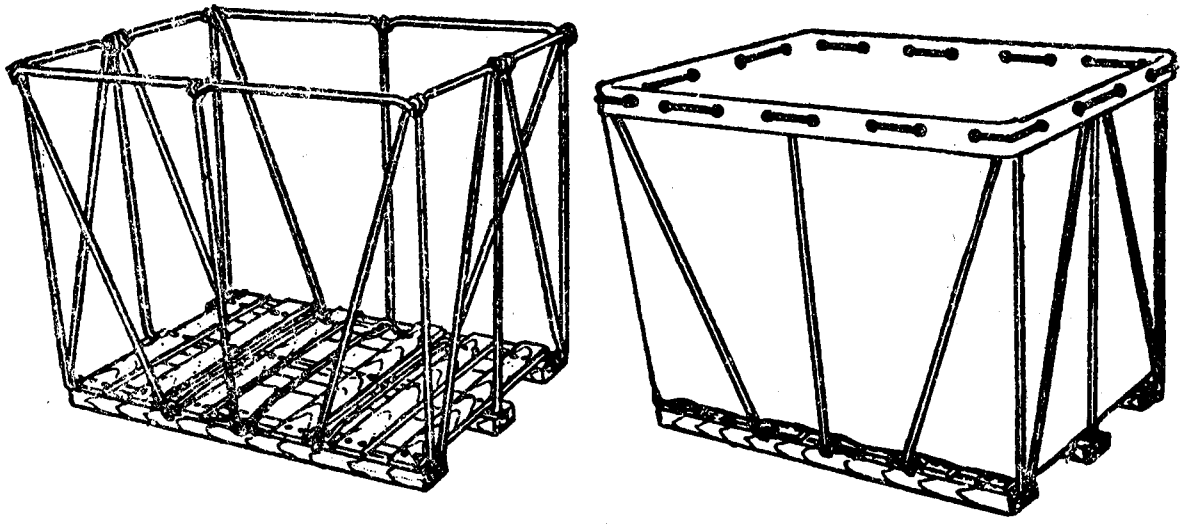

FRAME COMPLETE

FIGURE 2. Sizes 5 and 6, type I, and size 5, type II, construction A. (See figure 11 for caster detail.)


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

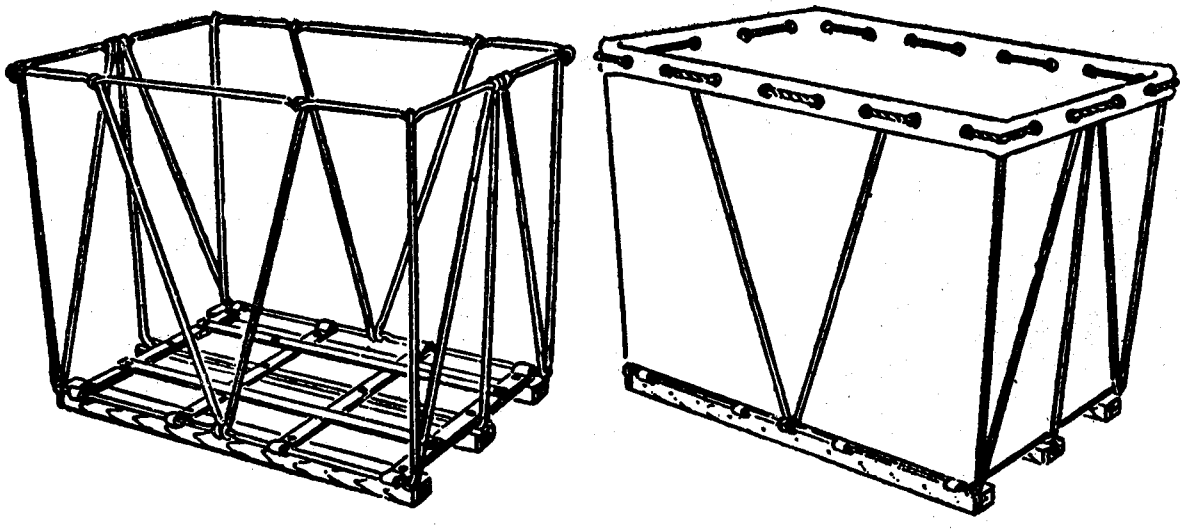

FRAME

COMPLETE

FIGURE 3. Sizes 2 and 3, type I and sizes 1 and 3, type II, construction B. (If casters are specified, see figure 12 for detail)

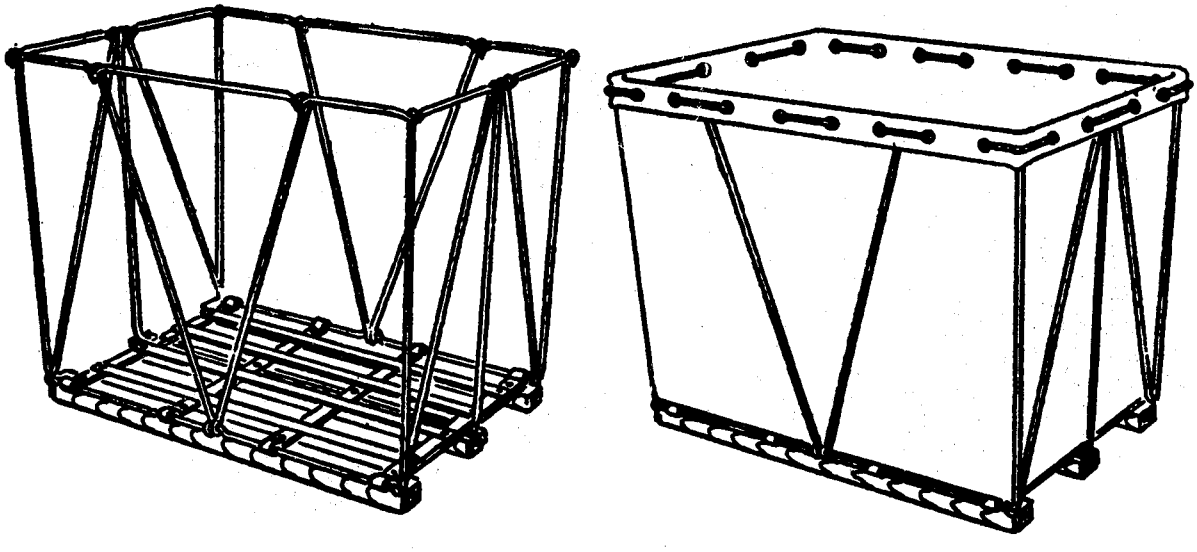


FRAME

COMPLETE


FIGURE 4. Size 4, type I, and size 4, type II, construction B. (See figure 12 for caster detail.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

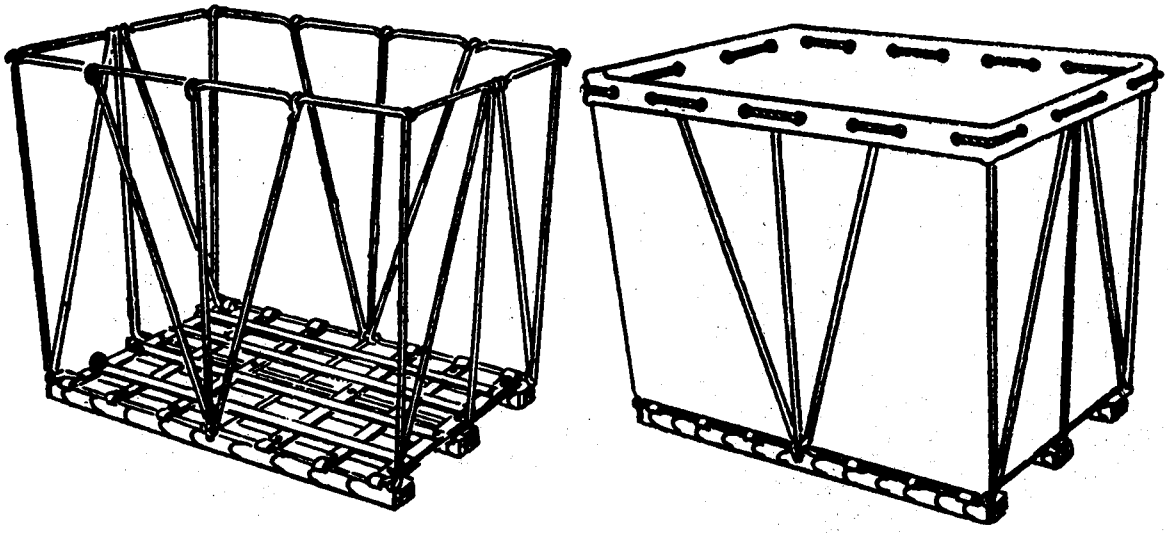

FRAME COMPLETE


FIGURE 5. Sizes 5 and 6, type I, and size 5, type II, construction B. (See figure 12 for caster detail.)

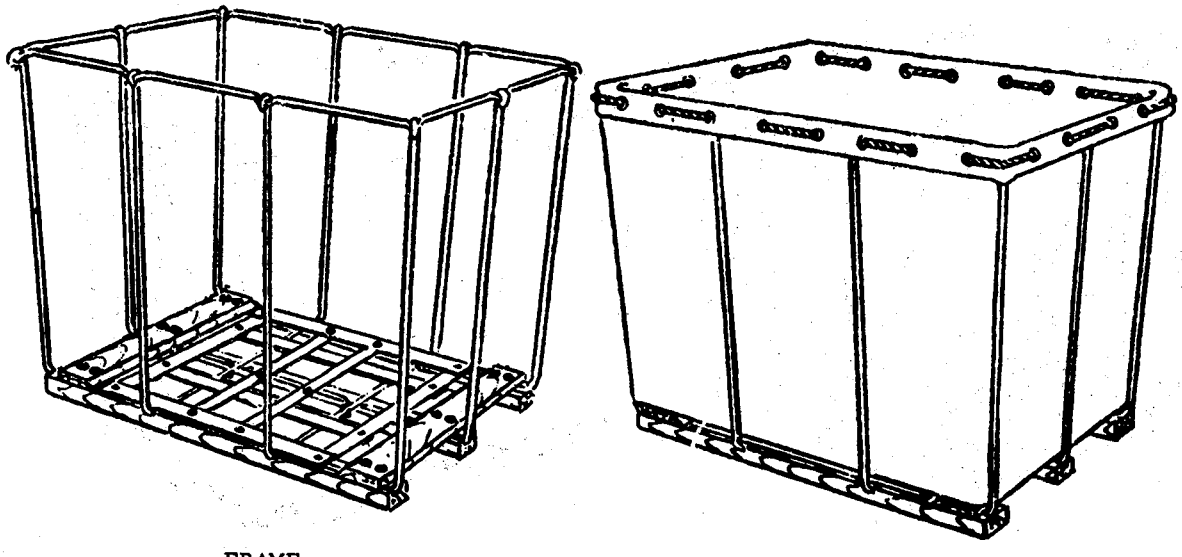

FRAME COMPLETE


FIGURE 6. Sizes 2,3, and 4, type I and sizes 1,3, and 4, type II, construction C. (If casters are specified, see figure 12 for detail.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

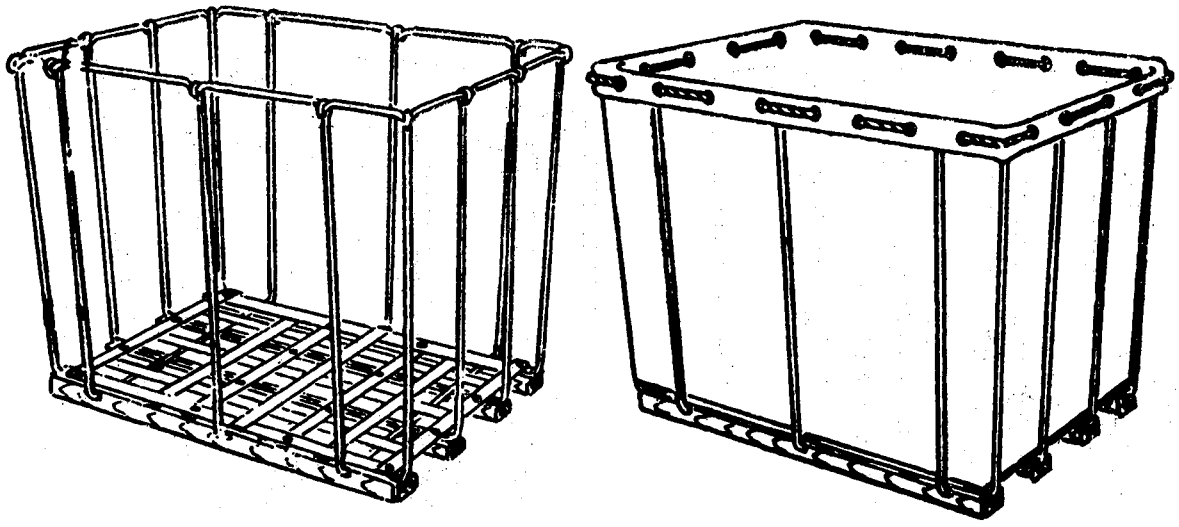

FRAME COMPLETE

FIGURE 7. Sizes 5 and 6, type I and size 5, type II, construction C.
(See figure 12 for caster detail.)

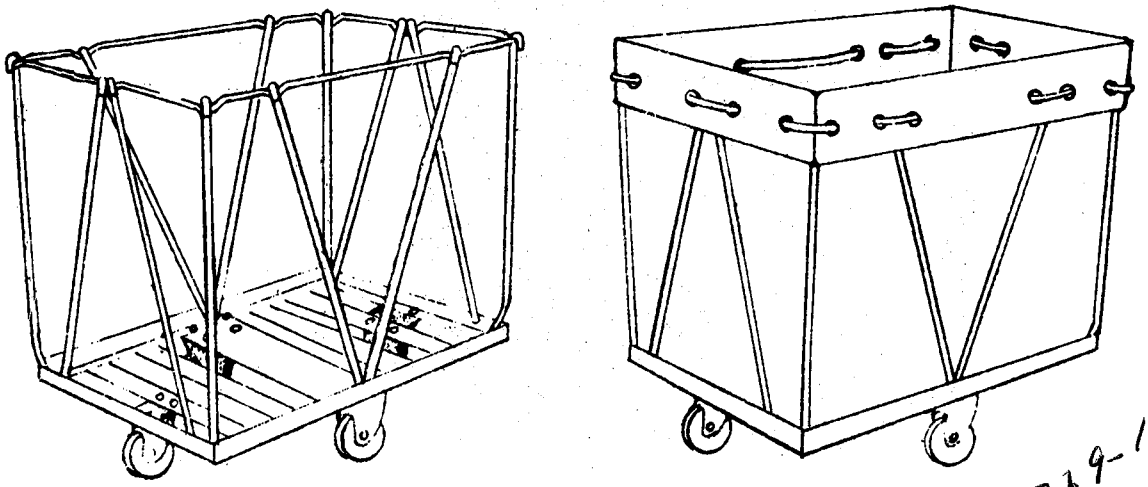


FRAME COMPLETE


7240-00-269-1242

FIGURE 8. Sizes 2,3, and 4, type I, construction D.
(See figure 13 for caster application, sizes 2,3, and 4.)
(See figure 14 for caster application, sizes 5 and 6)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

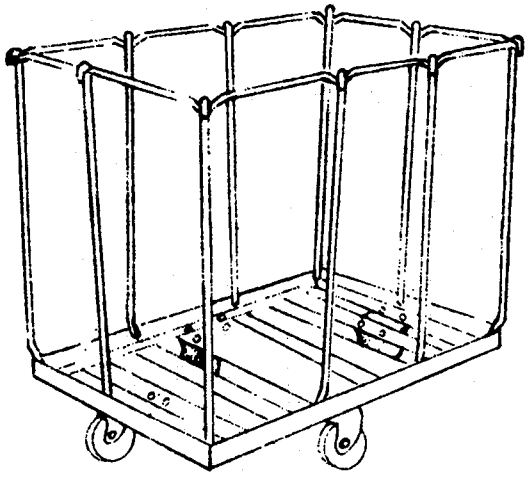

FRAME

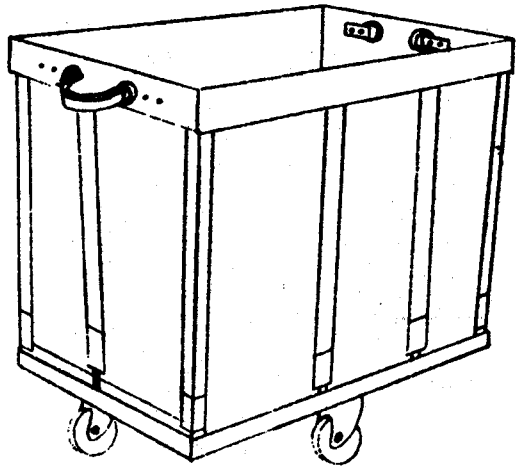

COMPLETE

FIGURE 9. Sizes 2,3, and 4, type II, construction D.
(See figure 13 for caster application sizes 2,3, and 4.)
(See figure 14 for caster application sizes 5 and 6.)


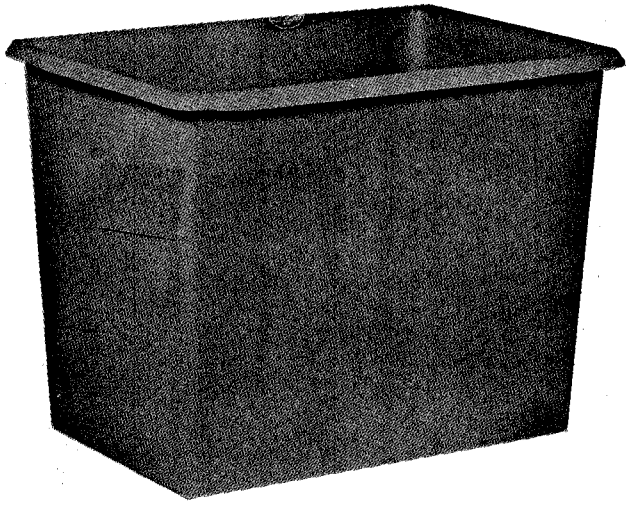



FIGURE 10. Plastic liner.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

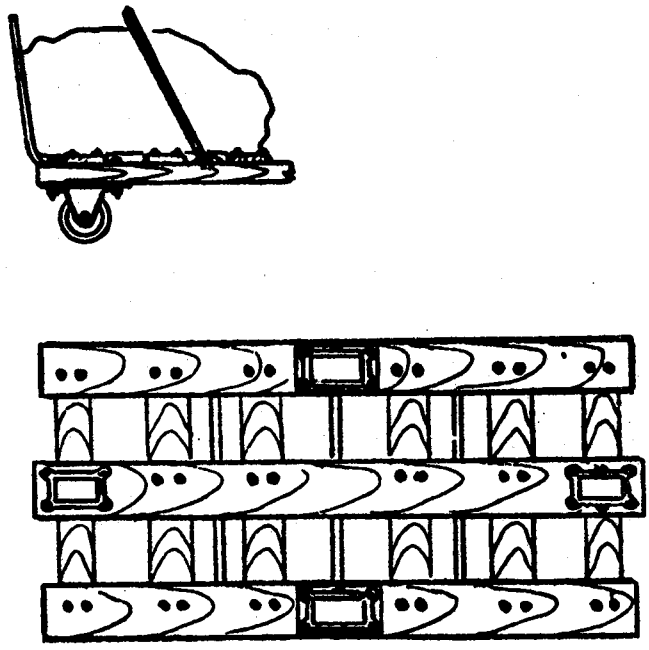

BOTTOM VIEW


FIGURE 11. Caster application for construction A.
(When casters are specified.)

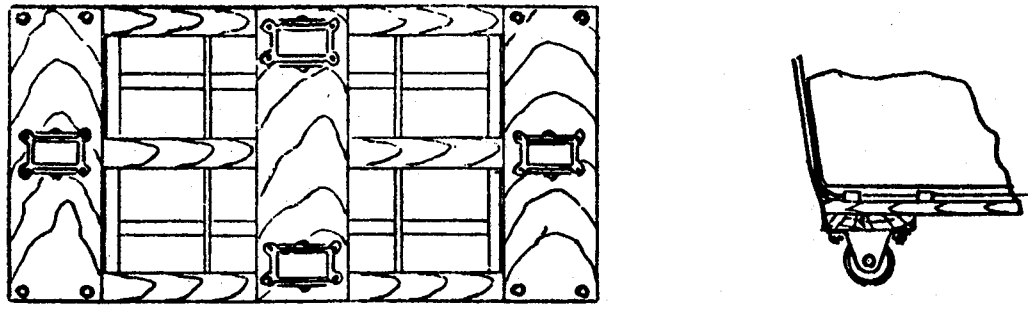

BOTTOM VIEW


FIGURE 12. Caster application for construction B or C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

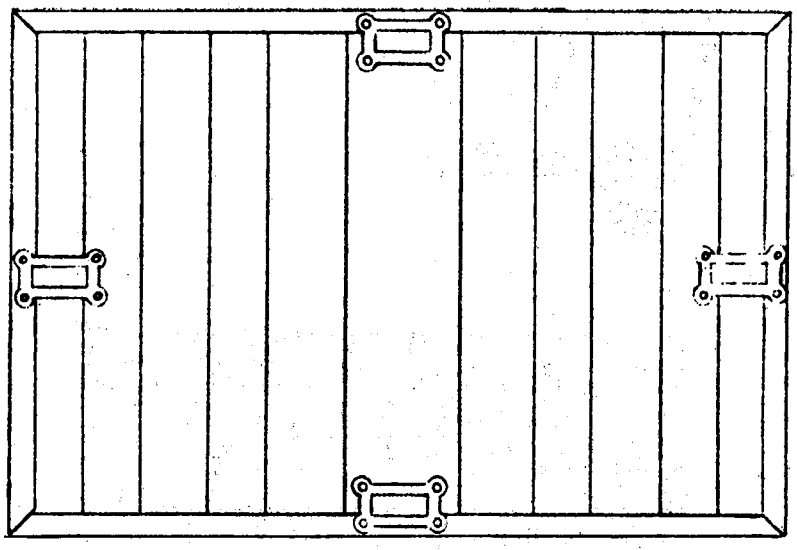

BOTTOM VIEW


FIGURE 13. Caster application for construction D, sizes 2,3, and 4.

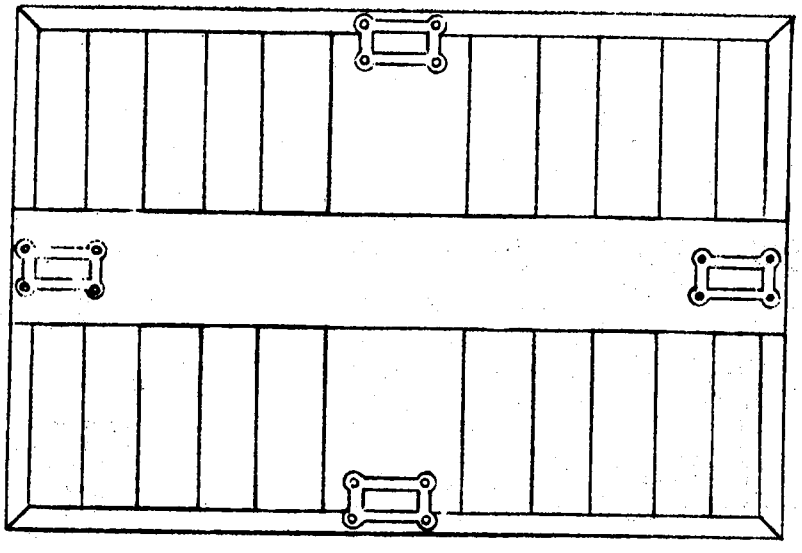


BOTTOM VIEW

FIGURE 14. Caster application for construction D, sizes 5 and 6.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.

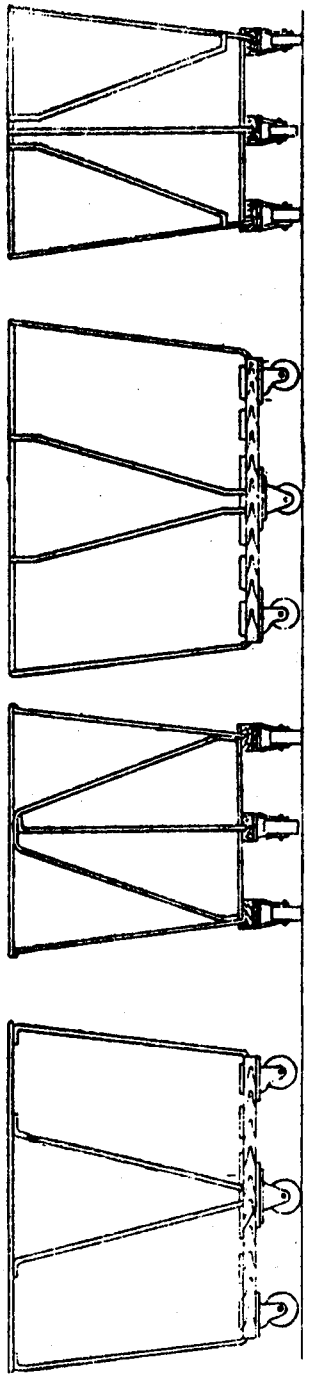

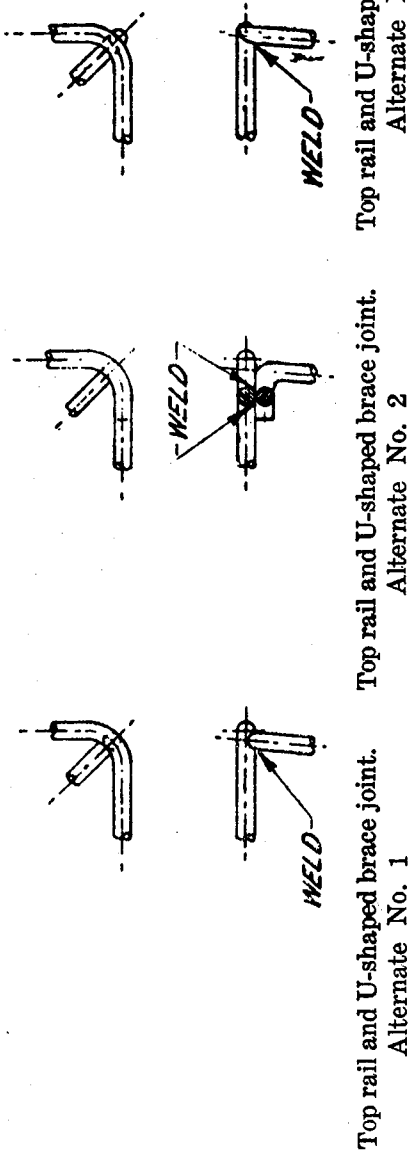

Top rail and U-shaped brace joint. Alternate No. 1

Top rail and U-shaped brace joint. Alternate No. 2

Top rail and U-shaped brace joint. Alternate No. 3

FIGURE 15. Detail of welded joints.

U. S. Government Printing Office: 1967

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain copies and other documents referenced herein. Price 25 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:08Z
Check the source to verify that this is the current version before use.