FED. SUP CLASS
5935

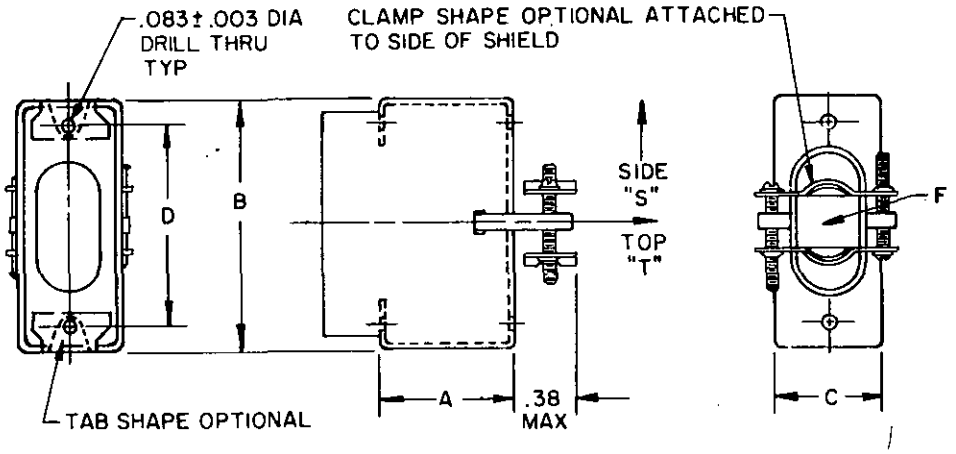

MS part no.	Connector size (No. of contacts)	A	B	C	D ±.005	F Min cable opening sq. inch
1	4	.750	.781	.265	.562	.025
2	7	.750	.781	.265	.562	.025
3	14	.750	.875	.347	.625	.076
4	20	.750	1.062	.347	.814	.076
5	26	.750	1.250	.347	1.000	.083
6	34	.750	1.250	.455	1.032	.235
7	44	1.500	1.625	.455	1.281	.275
8	50	1.500	1.625	.455	1.408	.294

(A) CANCELED AFTER 4 AUGUST 1972

NO SUPERSEDING STANDARD

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerance is ±.016.
4. Material: Aluminum alloy, per specification QQ-A-250/8, temper H32 .030 thick.
5. Finish: Anodize per specification MIL-A-8625, type I or type II.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitation for bid.

APPROVED 20 May 1970 REVISED A (4) August 1972

User activities: Army ME, AM, WC
Navy MC
Air Force

Reviewer activities: Army MI, Mu, AT
Navy AS, SH, OS
Air Force 11
DSA-ES

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. Navy-EC Other Cust AF-11 Army-EL	International Interest	TITLE SHIELD, ELECTRICAL CONNECTOR FOR SIZE 4, 7, 14, 20, 26, 34, 44, & 50 CONTACT CONNECTOR, FOR USE WITH LONG TURNABLE JACKSCREWS	MILITARY STANDARD MS 14028
Procurement Specification MIL-C-28748		SUPERSEDES:	SHEET 1 OF 1

DD FORM 10 APR 64 672 *(Coordinated)* PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆U.S. GOVERNMENT PRINTING OFFICE:1972-714-537/1137

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:32Z
Check the source to verify that this is the current version before use.