This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. WEP

Other Cust NONE

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:


TITLE

BUSHING - SCREW, PLAIN (MIL-S-8879 THREAD)

MILITARY STANDARD

MS17319 (WEP)

SHEET 1 OF 2

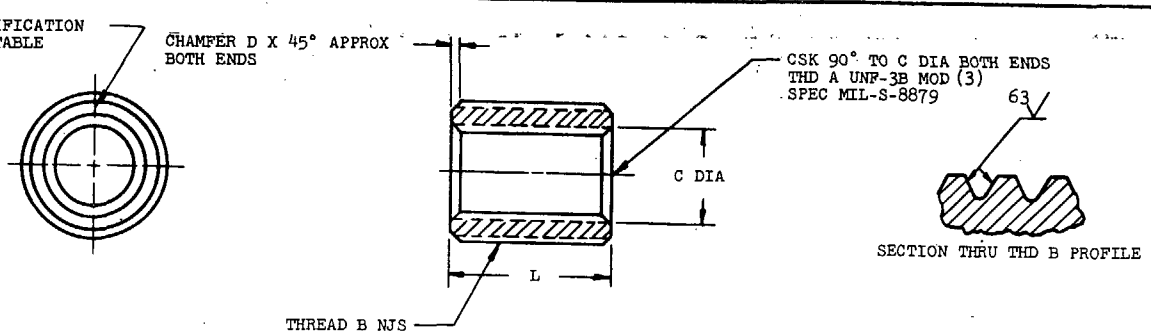

THREAD A	L	C +.010 -.000	(2) THREAD B SIZE	MAJOR DIA	MINOR DIA	ROOT RAD	STANDARD NO MARKS PD THD B	STANDARD NO MARKS PART NO.	+.003 OVERSIZE ONE MARK PD THD B	+.003 OVERSIZE ONE MARK PART NO.	+.006 OVERSIZE TWO MARKS PD THD B	+.006 OVERSIZE TWO MARKS PART NO.
.190 -32	.250	.200	.3125-24	.3053-.3125	.2640-.2678	.0063-.0075	.2876-.2888	MS17319-010	.2906-.2918	MS17319-011	.2936-.2948	MS17319-012
.190 -32	.312	.200	.3125-24	.3053-.3125	.2640-.2678	.0063-.0075	.2876-.2888	MS17319-020	.2906-.2918	MS17319-021	.2936-.2948	MS17319-022
.190 -32	.375	.200	.3125-24	.3053-.3125	.2640-.2678	.0063-.0075	.2876-.2888	MS17319-030	.2906-.2918	MS17319-031	.2936-.2948	MS17319-032
.190 -32	.250	.200	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-040	.3531-.3543	MS17319-041	.3561-.3573	MS17319-042
.190 -32	.312	.200	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-050	.3531-.3543	MS17319-051	.3561-.3573	MS17319-052
.190 -32	.375	.200	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-060	.3531-.3543	MS17319-061	.3561-.3575	MS17319-062
.250 -28	.312	.260	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-110	.3531-.3543	MS17319-111	.3561-.3573	MS17319-112
.250 -28	.375	.260	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-120	.3531-.3543	MS17319-121	.3561-.3573	MS17319-122
.250 -28	.438	.260	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-130	.3531-.3543	MS17319-131	.3561-.3573	MS17319-132
.250 -28	.500	.260	.375 -24	.3678-.3750	.3265-.3303	.0063-.0075	.3501-.3513	MS17319-140	.3531-.3543	MS17319-141	.3561-.3573	MS17319-142
.250 -28	.312	.260	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-150	.4103-.4116	MS17319-151	.4133-.4146	MS17319-152
.250 -28	.375	.260	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-160	.4103-.4116	MS17319-161	.4133-.4146	MS17319-162
.250 -28	.438	.260	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-170	.4103-.4116	MS17319-171	.4133-.4146	MS17319-172
.250 -28	.500	.260	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-180	.4103-.4116	MS17319-181	.4133-.4146	MS17319-182
.3125-24	.375	.320	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-210	.4103-.4116	MS17319-211	.4133-.4146	MS17319-212
.3125-24	.438	.320	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-220	.4103-.4116	MS17319-221	.4133-.4146	MS17319-222
.3125-24	.500	.320	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-230	.4103-.4116	MS17319-231	.4133-.4146	MS17319-232
.3125-24	.562	.320	.4375-20	.4294-.4375	.3790-.3833	.0075-.0090	.4073-.4086	MS17319-240	.4103-.4116	MS17319-241	.4133-.4146	MS17319-242

D = .047 FOR .500-20 OD THD AND SMALLER; .062 FOR .5625-18 OD THD AND LARGER.

* PREFERRED SIZE.

NOTE: (1) PITCH DIAMETERS OF THREADS SHALL BE CONCENTRIC WITHIN .005 FIR.

(2) MAJOR DIA AND ROOT RADIUS IS SAME FOR STD, + .003, AND + .006 OVERSIZE; MINOR DIA INCREASES AS PER INCREMENT OF OVERSIZE.

(3) MINOR DIA MODIFIED PER MIL-S-8879.

FED. SUP CLASS 4730

APPROVED 6 Sep 1961 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:06Z
Check the source to verify that this is the current version before use.

This standard has been approved by the BUREAU OF NAVAL WEAPONS Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

P.A. WEP
Other Cust NONE

PROCUREMENT SPECIFICATION NONE

SUPERSEDES:

TITLE
BUSHING-SCREW, PLAIN
(MIL-S-8879 THREAD)

MILITARY STANDARD
MS 17319 (WEP)

SHEET 2 OF 2

	THREAD A	L	C +.010 -.000	(2) THREAD B SIZE	MAJOR DIA	MINOR DIA	ROOT RADIUS	STANDARD NO MARKS PD THD B	STANDARD NO MARKS PART NO.	+.003 OVERSIZE ONE MARK PD THD B	+.003 OVERSIZE ONE MARK PART NO.	+.006 OVERSIZE TWO MARKS PD THD B	+.006 OVERSIZE TWO MARKS PART NO.
	.3125-24	.375	.320	.500 -20	.4919-.5000	.4415-.4458	.0075-.0090	.4698-.4711	MS17319-250	.4728-.4741	MS17319-251	.4758-.4771	MS17319-252
	.3125-24	.438	.320	.500 -20	.4919-.5000	.4415-.4458	.0075-.0090	.4698-.4711	MS17319-260	.4728-.4741	MS17319-261	.4758-.4771	MS17319-262
	.3125-24	.500	.320	.500 -20	.4919-.5000	.4415-.4458	.0075-.0090	.4698-.4711	MS17319-270	.4728-.4741	MS17319-271	.4758-.4771	MS17319-272
*	.3125-24	.562	.320	.500 -20	.4919-.5000	.4415-.4458	.0075-.0090	.4698-.4711	MS17319-280	.4728-.4741	MS17319-281	.4758-.4771	MS17319-282
	.375 -24	.438	.385	.5625-18	.5538-.5625	.4975-.5023	.0083-.0100	.5289-.5304	MS17319-310	.5319-.5334	MS17319-311	.5349-.5364	MS17319-312
	.375 -24	.500	.385	.5625-18	.5538-.5625	.4975-.5023	.0083-.0100	.5289-.5304	MS17319-320	.5319-.5334	MS17319-321	.5349-.5364	MS17319-322
	.375 -24	.562	.385	.5625-18	.5538-.5625	.4975-.5023	.0083-.0100	.5289-.5304	MS17319-330	.5319-.5334	MS17319-331	.5349-.5364	MS17319-332
*	.375 -24	.625	.385	.5625-18	.5538-.5625	.4975-.5023	.0083-.0100	.5289-.5304	MS17319-340	.5319-.5334	MS17319-341	.5349-.5364	MS17319-342
	.4375-20	.500	.450	.625 -18	.6163-.6250	.5600-.5648	.0083-.0100	.5914-.5929	MS17319-410	.5944-.5959	MS17319-411	.5974-.5989	MS17319-412
	.4375-20	.562	.450	.625 -18	.6163-.6250	.5600-.5648	.0083-.0100	.5914-.5929	MS17319-420	.5944-.5959	MS17319-421	.5974-.5989	MS17319-422
	.4375-20	.625	.450	.625 -18	.6163-.6250	.5600-.5648	.0083-.0100	.5914-.5929	MS17319-430	.5944-.5959	MS17319-431	.5974-.5989	MS17319-432
*	.4375-20	.688	.450	.625 -18	.6163-.6250	.5600-.5648	.0083-.0100	.5914-.5929	MS17319-440	.5944-.5959	MS17319-441	.5974-.5989	MS17319-442
	.500 -20	.625	.510	.6875-16	.6781-.6875	.6141-.6195	.0094-.0113	.6495-.6511	MS17319-510	.6525-.6541	MS17319-511	.6555-.6571	MS17319-512
	.500 -20	.688	.510	.6875-16	.6781-.6875	.6141-.6195	.0094-.0113	.6495-.6511	MS17319-520	.6525-.6541	MS17319-521	.6555-.6571	MS17319-522
*	.500 -20	.750	.510	.6875-16	.6781-.6875	.6141-.6195	.0094-.0113	.6495-.6511	MS17319-530	.6525-.6541	MS17319-531	.6555-.6571	MS17319-532
	.5625-18	.688	.570	.750 -16	.7406-.7500	.6766-.6820	.0094-.0113	.7120-.7136	MS17319-610	.7150-.7166	MS17319-611	.7180-.7196	MS17319-612
	.5625-18	.750	.570	.750 -16	.7406-.7500	.6766-.6820	.0094-.0113	.7120-.7136	MS17319-620	.7150-.7166	MS17319-621	.7180-.7196	MS17319-622
*	.5625-18	.812	.570	.750 -16	.7406-.7500	.6766-.6820	.0094-.0113	.7120-.7136	MS17319-630	.7150-.7166	MS17319-631	.7180-.7196	MS17319-632
	.625 -18	.750	.635	.8125-16	.8031-.8125	.7393-.7449	.0094-.0113	.7747-.7765	MS17319-710	.7777-.7795	MS17319-711	.7807-.7825	MS17319-712
	.625 -18	.812	.635	.8125-16	.8031-.8125	.7393-.7449	.0094-.0113	.7747-.7765	MS17319-720	.7777-.7795	MS17319-721	.7807-.7825	MS17319-722
*	.625 -18	.875	.635	.8125-16	.8031-.8125	.7393-.7449	.0094-.0113	.7747-.7765	MS17319-730	.7777-.7795	MS17319-731	.7807-.7825	MS17319-732

MATERIAL: STEEL AMS 6322

HARDNESS: ROCKWELL C26-32 PARTS MUST BE HARDENED (OIL QUENCHED) AND TEMPERED BEFORE THREADING.

FINISH: CADMIUM PLATE AMS 2400.

PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.

SURFACE ROUGHNESS: MIL-STD-10. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.

BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.

DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

FED. SUP. CLASS 4730

APPROVED 6 Sep 1961 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:06Z
Check the source to verify that this is the current version before use.