

FED. SUP CLASS
6115

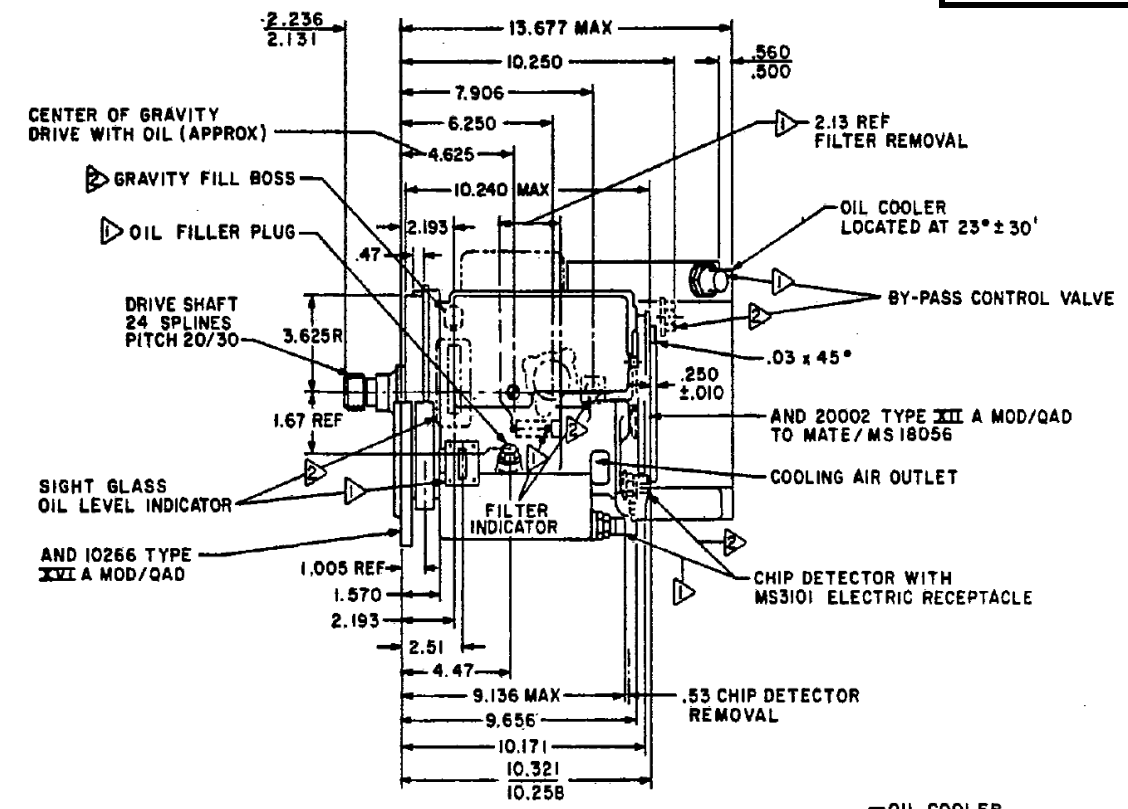

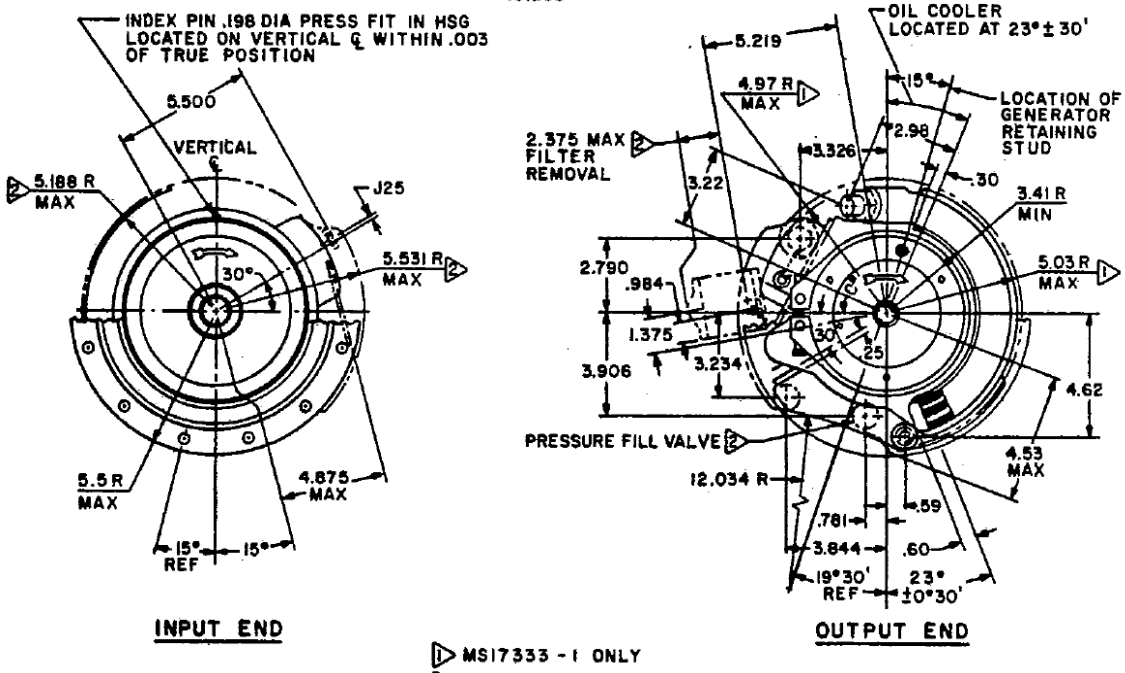

▷ MS17333-1 ONLY
▷ MS17333-2 ONLY

IDENTIFICATION OF ITEMS	
ITEM	MS PART NUMBER
17 HP TRANSMISSION	MS17333-1
21.7 HP TRANSMISSION	MS17333-2

Ⓓ ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 20 NOV 1967 REVISED Ⓓ 10 JAN 1980

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY – AS Other Cust.	TITLE **TRANSMISSION, POWER, CONSTANT SPEED, 17 HP AND 21.7 HP**	**MILITARY STANDARD** **MS17333(AS)**
PROCUREMENT SPECIFICATION MIL-T-7101	SUPERSEDES	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Limited Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.

TRANSMISSION DATA	
POLAR MOMENT OF INERTIA (DRIVEN GENERATOR), WR^2, LB-FT^2+0.1	.16
EFFICIENCY OVER RATED INPUT SPEED RANGE @ RATED POWER, MIN. %	SEE FIGURE 1
AUDIO NOISE, MAX. ABOVE 90 DB LEVEL, DB	5
DIRECTION OF ROTATION-INPUT FLANGE AND OUTPUT PAD	CLOCKWISE
WEIGHT, TOTAL SYSTEM (INCLUDING FLUID), MAX. LBS.	45
OH MOMENT, TOTAL SYSTEM, MAX., INCH-LBS.	230
INPUT SHAFT SHEAR VALUE, MAX., INCH-LBS. MIN. TO MAX.	2350 TO 2750
ACCELERATION AND DECELERATION RATE, MIN. RPM/SEC. CAPABILITY	2400 ACCELERATION 3000 DECELERATION
OPERATING TEMPERATURE-CONTINUOUS AMBIENT, ^{o}F.	-65 TO 300
OVERSPEED OUTPUT TRANSIENT, 1-5 SECONDS, MAX., RPM	10,000
OVERSPEED INPUT TRANSIENT, 5 MINUTES, MIN., RPM	11,000

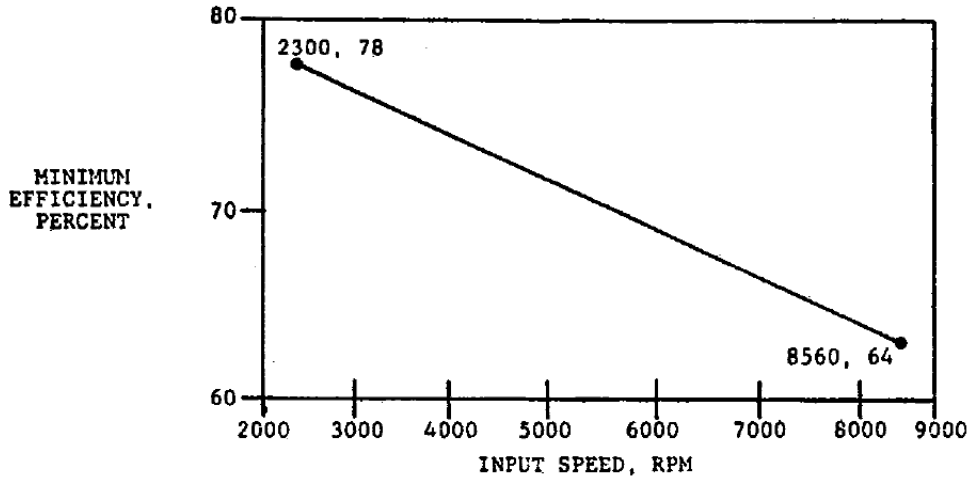


FIGURE 1. EFFICIENCY OVER RATED INPUT SPEED RANGE

REQUIREMENTS:

1. EACH TRANSMISSION SHALL INCLUDE A QUICK-ATTACH-DETACH MOUNTING DEVICE WHICH SHALL BE USABLE FOR MOUNTING THE TRANSMISSION ON THE MOUNTING PAD CALLED OUT ON PAGE 1, AND THE TRANSMISSION SHALL BE MOUNTED ON SUCH A PAD BY MEANS OF THE Q.A.D. MOUNTING DEVICE FOR ALL TESTS OF THE SPECIFICATION WHICH REQUIRE THAT THE TRANSMISSION BE MOUNTED.
2. TWELVE MS 90415-6 NUTS SHALL BE PACKED WITH EACH TRANSMISSION AT THE TIME OF THE DELIVERY. THE PACKAGING OF THESE NUTS AND THE ATTACHMENT OF THIS PACKAGE TO THE TRANSMISSION IS SUBJECT TO THE APPROVAL OF THE QUALIFYING ACTIVITY.

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to employ this standard where suitable.

APPROVED 20 NOV 1967 REVISED Ⓓ FOR CHANGES SEE SHEETS 1 AND 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:07Z
Check the source to verify that this is the current version before use.