THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-F-8975

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

Form Approved
OMB No 0704-0188

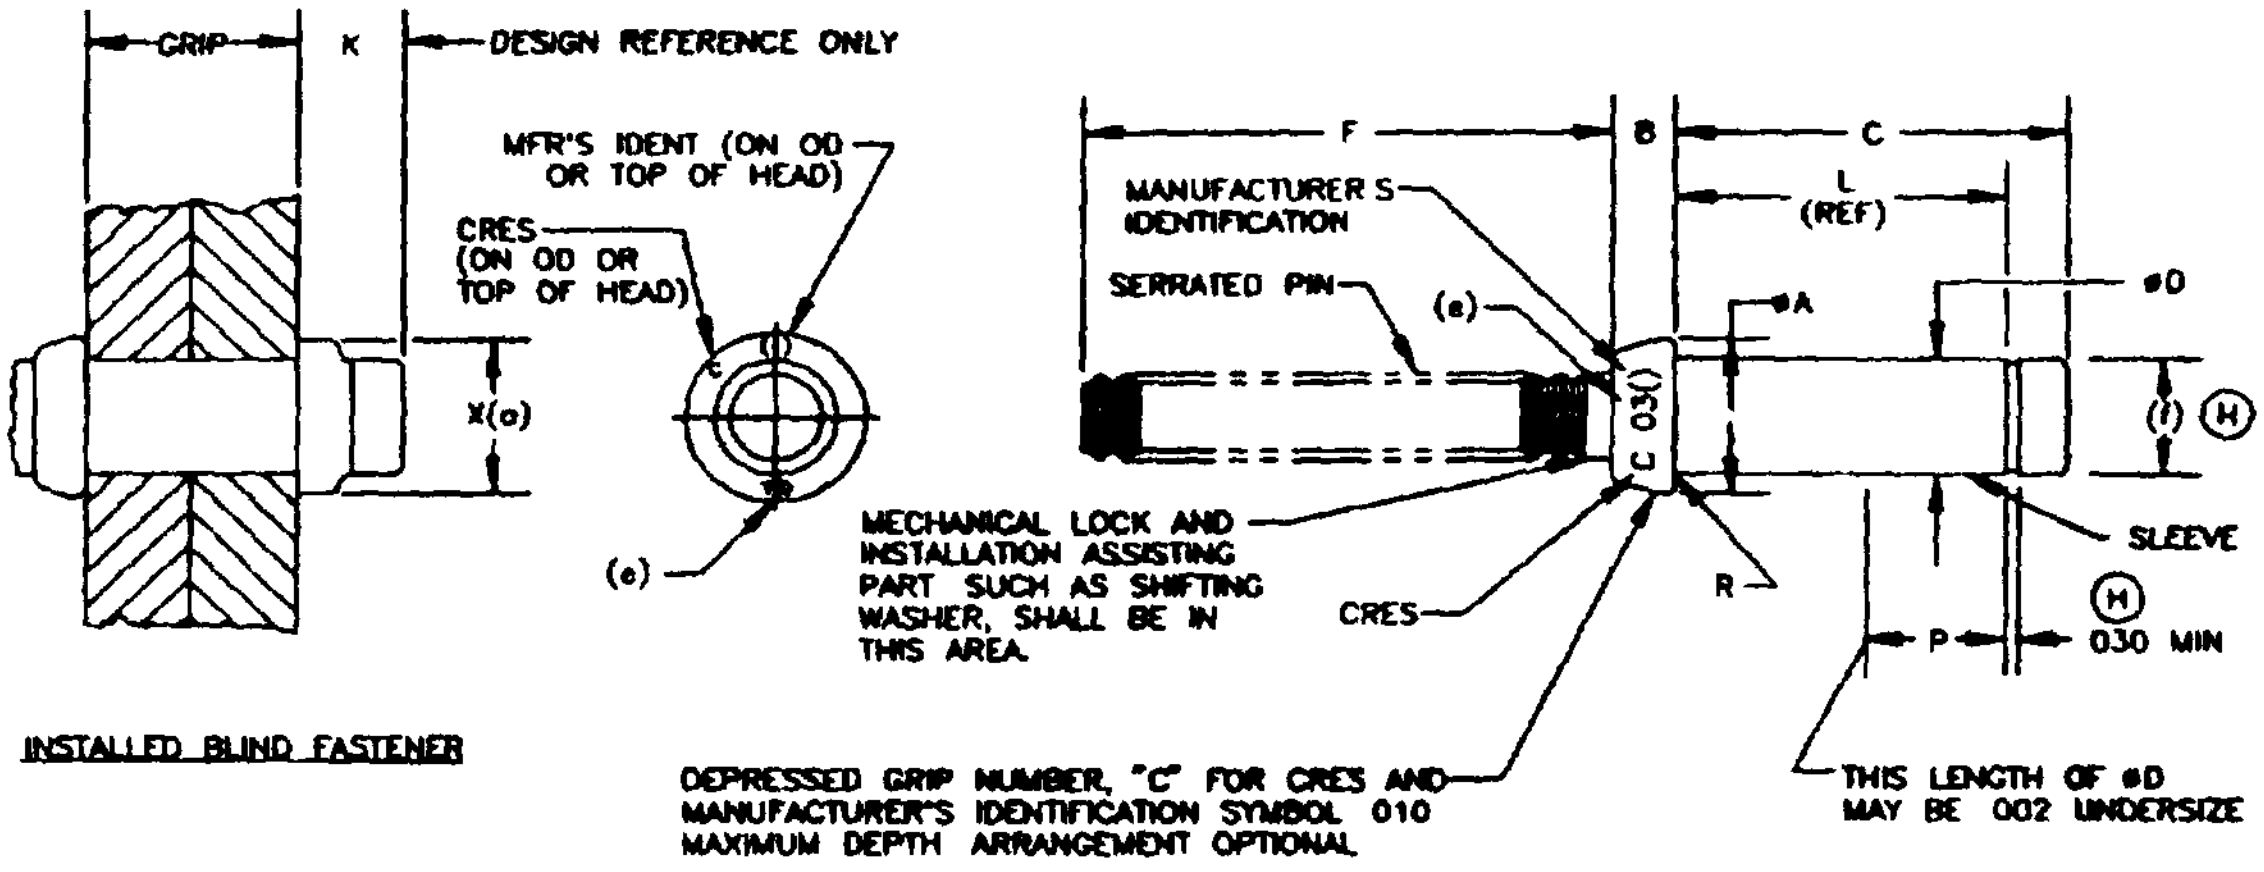
GRIP
K
DESIGN REFERENCE ONLY
MFR'S IDENT (ON OD OR TOP OF HEAD)
CRES (ON OD OR TOP OF HEAD)
X(a)
(e)
F
B
C
L (REF)
MANUFACTURER S IDENTIFICATION
SERRATED PIN
(e)
⌀A
⌀D
C 03
(f) Ⓗ
SLEEVE
Ⓗ .030 MIN
P
R
CRES
MECHANICAL LOCK AND INSTALLATION ASSISTING PART SUCH AS SHIFTING WASHER, SHALL BE IN THIS AREA.
DEPRESSED GRIP NUMBER, "C" FOR CRES AND MANUFACTURER'S IDENTIFICATION SYMBOL 010 MAXIMUM DEPTH ARRANGEMENT OPTIONAL
THIS LENGTH OF ⌀D MAY BE 002 UNDERSIZE

INSTALLED BLIND FASTENER

TABLE I FASTENER DIMENSIONS AND STRENGTHS.

SIZE DASH NUMBER (b)			NOM SIZE	⌀A	B	⌀D	F	K		P	R	X	INSTALLED FASTENER		Ⓗ
DOUBLE ACTION	SINGLE ACTION												MIN ULTIMATE SINGLE SHEAR LBS.	MIN ULTIMATE TENSILE LBS	HOLE LIMITS (REF)
(c)	(c)	(d)					MIN.	MAX.	MIN	MAX.	RAD MAX	(a) MIN			
−05	S05	U05	5/32	272 250	070 062	.164 162	.844	.202	120	215	010	195	1980	1150	167 164
−06	S06	U06	3/16	332 305	135 125	199 197	.875	.231	146	250	015	238	2925	1690	202 199
-	−08	U08	1/4	432 400	140 130	.260 258	1 000	.279	188	.305	018	315	5000	2900	263 260
-	−10	U10	5/16	522 480	.141 131	312 310	1 218	.319	224	.350	021	373	7200	4170	315 312
-	−12	U12	3/8	627 580	205 195	374 372	1.562	364	284	405	025	448	10380	5970	377 374

(a) MAXIMUM DIAMETER OF BLIND HEAD (X) SHALL NOT EXCEED MAXIMUM DIAMETER OF MANUFACTURED HEAD (A)

(b) SIZES "05" AND "06" WITH "-" ARE INSTALLED WITH A DOUBLE ACTION TOOL. ALL OTHER SIZES ARE INSTALLED WITH A SINGLE ACTION TOOL. SIZES "U05" AND "U06" MAY BE INSTALLED WITH A DOUBLE OR SINGLE ACTION TOOL. SEE APPENDIX A OF MIL-F-8975 FOR TOOL SELECTION CHART

Ⓗ (c) −05, −06, ~~S05, S06 —08, —10, AND —12~~ ARE INACTIVE FOR NEW DESIGN AFTER 1 JAN 91 USE U05, U06 S05 AND S06

(d) LETTER "U" SIGNIFIES SINGLE ACTION FASTENER WITHOUT FRANGIBLE TYPE OF LOCKING COLLAR OR LOCKING COLLAR CAP "U" AND "S" CODE FASTENERS IN SIZES "05" AND "06" ARE COLOR IDENTIFIED GREEN ON LOCKING COLLAR SHIFTING WASHER, OR SERRATED PIN "S" CODE FASTENERS MAY BE SUPPLIED WITH A LOCKING COLLAR CAP

(e) SINGLE DIGIT MARKING IS PERMISSIBLE FOR GRIP DASH NUMBERS LESS THAN 10

Ⓗ (f) DIAMETER OF SERRATED PIN HEAD SHALL NOT EXCEED "⌀D" MAX AND MAY BE 002 BELOW "⌀D" MIN, IN AREA "P" ONLY

Ⓗ DENOTES CHANGE(S)

INCH — POUND

PREPARING ACTIVITY DLA - IS
CUSTODIANS ARMY-AV NAVY-AS
AIR FORCE-99 DLA-
REVIEW MI, 82
USER
PROJECT NUMBER 5320-0808

MILITARY SPECIFICATION SHEET

TITLE
FASTENER, BLIND, HIGH STRENGTH, PULL TYPE, POSITIVE MECHANICAL LOCK, PROTRUDING HEAD, CORROSION RESISTING STEEL, 95 KSI Fsu

SPECIFICATION SHEET NUMBER
MS21141 31 MAR 1994
REV H

SUPERSEDING
MS21141 G 24 DEC 90

AMSC- N/A FSC 5320

DISTRIBUTION STATEMENT
A. Approved for public release, distribution is unlimited

Page 1 of 3

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-F-8975

Form Approved
OMB No 0704-0188

Ⓗ

TABLE II GRIP TABULATIONS

ø5/32 (-05) Ⓗ					ø3/16 (-06) Ⓗ					ø1/4 (-08)					ø5/16 (-10) Ⓗ					ø3/8 (-12) Ⓗ				
GRIP DASH NO	GRIP RANGE MIN	GRIP RANGE MAX	C MAX	L	GRIP DASH NO	GRIP RANGE MIN	GRIP RANGE MAX	C MAX	L	GRIP DASH NO	GRIP RANGE MIN	GRIP RANGE MAX	C MAX	L	GRIP DASH NO	GRIP RANGE MIN	GRIP RANGE MAX	C MAX	L	GRIP DASH NO	GRIP RANGE MIN	GRIP RANGE MAX	C MAX	L
-0501	031	096	372	217																				
-0502	094	157	434	280	-0602	120	157	505	329	-0802	.094	157	553	344	-1002	094	157	618	381	-1202	094	157	695	423
-0503	156	220	496	342	-0603	156	220	541	365	-0803	156	220	616	406	-1003	156	220	680	443	-1203	156	220	757	485
-0504	219	282	559	405	-0604	219	282	604	428	-0804	219	282	678	469	-1004	219	282	743	506	-1204	219	282	820	548
-0505	281	345	622	467	-0605	281	345	666	490	-0805	281	345	740	531	-1005	281	345	805	568	-1205	281	345	883	610
-0506	344	407	684	530	-0606	344	407	729	553	-0806	344	407	803	594	-1006	344	407	868	631	-1206	344	407	945	673
-0507	406	470	746	592	-0607	406	470	791	615	-0807	406	470	866	656	-1007	406	470	930	693	-1207	406	470	1 007	735
-0508	469	532	809	655	-0608	469	532	854	678	-0808	469	532	928	719	-1008	469	532	993	756	-1208	469	532	1 070	798
-0509	531	595	872	717	-0609	531	595	916	740	-0809	531	595	990	781	-1009	.531	595	1 055	818	-1209	531	595	1 133	860
-0510	594	657	934	780	-0610	594	657	979	803	-0810	594	657	1 053	844	-1010	.594	657	1 118	881	-1210	594	657	1 195	923
-0511	656	720	996	842	-0611	656	720	1 041	865	-0811	656	720	1 116	906	-1011	656	720	1 180	943	-1211	656	720	1 257	985
-0512	719	782	1 059	905	-0612	719	782	1 104	928	-0812	719	782	1 178	969	-1012	719	782	1 243	1 006	-1212	719	782	1 320	1 048
-0513	781	845	1 122	967	-0613	781	845	1 166	990	-0813	781	845	1 240	1 031	-1013	781	845	1 305	1 068	-1213	781	845	1 383	1 110
-0514	844	907	1 184	1 030	-0614	844	907	1 229	1 053	-0814	844	907	1 303	1 094	-1014	.844	907	1 368	1 131	-1214	844	907	1 445	1 173
-0515	906	970	1 246	1 092	-0615	906	970	1 291	1 115	-0815	906	970	1 366	1 156	-1015	906	970	1 430	1 193	-1215	906	970	1 507	1 235
-0516	969	1 032	1 309	1 155	-0616	969	1 032	1 354	1 178	-0816	.969	1 032	1 428	1 219	-1016	969	1 032	1 493	1 256	-1216	969	1 032	1 570	1 298
					-0617	1 031	1 095	1 416	1 240	-0817	1 031	1 095	1 490	1 281	-1017	1 031	1 095	1 555	1 318	-1217	1 031	1 095	1 633	1 360
					-0618	1 094	1 157	1 479	1 303	-0818	1.094	1 157	1 553	1.344	-1018	1 094	1 157	1 618	1 381	-1218	1 094	1 157	1 695	1 423
					-0619	1 156	1 220	1 541	1 365	-0819	1 156	1 220	1 616	1 406	-1019	1 156	1 220	1 680	1 443	-1219	1 156	1 220	1 757	1 485
					-0620	1.219	1 282	1 604	1 428	-0820	1.219	1 282	1 678	1 469	-1020	1.219	1 282	1 743	1 506	-1220	1 219	1 282	1 820	1 548
					-0621	1 281	1 345	1 666	1 490	-0821	1 281	1 345	1 740	1 531	-1021	1 281	1 345	1 805	1 568	-1221	1 281	1 345	1 883	1 610
					-0622	1 344	1 407	1 729	1 553	-0822	1 344	1 407	1 803	1 594	-1022	1 344	1 407	1 868	1 631	-1222	1 344	1 407	1 945	1 673
					-0623	1 406	1 470	1 791	1 615	-0823	1 406	1 470	1 866	1 656	-1023	1 406	1 470	1 930	1 693	-1223	1 406	1 470	2 007	1 735
					-0624	1 469	1 532	1 854	1 678	-0824	1 469	1 532	1 928	1 719	-1024	1 469	1 532	1 993	1 756	-1224	1 469	1 532	2 070	1 798
					-0625	1 531	1 595	1 916	1 740	-0825	1 531	1 595	1 990	1 781	-1025	1 531	1 595	2 055	1 818	-1225	1 531	1 595	2 133	1 860
					-0626	1 594	1 657	1 979	1 803	-0826	1 594	1 657	2 053	1 844	-1026	1 594	1 657	2 118	1 881	-1226	1 594	1 657	2 195	1 923
															-1027	1 656	1 720	2 180	1 943	-1227	1 656	1 720	2 257	1 985
															-1028	1 719	1 782	2 243	2 006	-1228	1 719	1 782	2 320	2 048
																				-1229	1 781	1 845	2 383	2 110
																				-1230	1 844	1 907	2 445	2 173
																				-1231	1 906	1 970	2 507	2 235
																				-1232	1 969	2 032	2 570	2 298

PREPARING ACTIVITY DLA - IS
CUSTODIANS ARMY - AV NAVY - AS
AIR FORCE - 99 DLA -
REVIEW MI, 82
USER
PROJECT NUMBER 5320-0808

MILITARY SPECIFICATION SHEET

TITLE
FASTENER, BLIND, HIGH STRENGTH, PULL TYPE, POSITIVE MECHANICAL LOCK, PROTRUDING HEAD, CORROSION RESISTING STEEL, 95 KSI Fsu

SPECIFICATION SHEET NUMBER
MS21141 31 MAR 1984
REV H

SUPERSEDING
MS21411 G 24 DEC 80

AMSC- N/A FSC 5320

DISTRIBUTION STATEMENT
A. Approved for public release distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE

Form Approved
OMB No 0704-0188

REQUIREMENTS

1 MATERIAL

SLEEVE	CORROSION RESISTING STEEL PER CHEMICAL REQUIREMENTS OF AMS5737 (A286)
SERRATED PIN	CORROSION RESISTING STEEL PER CHEMICAL REQUIREMENTS OF AMS5737 (A286)
MECHANICAL LOCK	CORROSION RESISTING STEEL PER CHEMICAL REQUIREMENTS OF AMS5737 OR TYPE 316 CRES CONFORMING TO THE CHEMICAL REQUIREMENTS OF AMS5690

2 PROTECTIVE TREATMENT

SLEEVE	PASSIVATION PER QQ-P-35 OR CADMIUM PLATING PER QQ-P-416 TYPE II (CLEAR DICHROMATE), CLASS 2
SERRATED PIN	PASSIVATION PER QQ-P-35
MECHANICAL LOCK	PASSIVATION PER QQ-P-35

3 LUBRICATION. WHEN LUBRICATED PARTS SHALL BE LUBRICATED PER MIL-L-46010, TYPE I OR MIL-L-87132

4 HOLE PREPARATION. SEE MS33522 EXCEPT FOR HOLE SIZES SHOWN IN MIL-F-8975

Ⓗ 5 EXAMPLE OF PART NUMBER. (FOR INACTIVE CODES SEE SHEET 1, FOOTNOTE (c))

MS21141 - 0803P = 1/4 DIA NOM SIZE 156 MIN GRIP CADMIUM PLATED, INSTALLED WITH A SINGLE ACTION TOOL

"P" DENOTES CADMIUM PLATING
NO CODE DENOTES PASSIVATION TREATMENT
GRIP RANGE (SEE TABLE II)
SIZE DASH NUMBER (SEE TABLE I)
- DENOTES FASTENERS INSTALLED WITH A DOUBLE ACTION TOOL, FOR SIZES 05 AND 06
'-' DENOTES FASTENERS INSTALLED WITH A SINGLE ACTION TOOL, FOR SIZES 08 10 AND 12.
'S' DENOTES FASTENERS INSTALLED WITH A SINGLE ACTION TOOL, FOR SIZES 05 AND 06
U DENOTES SINGLE ACTION TOOL FASTENERS INSTALLED WITH A SINGLE ACTION TOOL, FOR ALL SIZES (SEE SHEET 1, FOOTNOTE(d))
MS NUMBER

NOTES.

1 DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES DECIMALS ± 010

Ⓗ 2 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE

Ⓗ 3 UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-F-8975

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

PREPARING ACTIVITY DLA - IS
CUSTODIANS ARMY- AV NAVY- AS
AIR FORCE- 99 DLA-
REVIEW MI, 82
USER
PROJECT NUMBER 5320-0808

MILITARY SPECIFICATION SHEET

TITLE
FASTENER, BLIND, HIGH STRENGTH, PULL TYPE, POSITIVE MECHANICAL LOCK, PROTRUDING HEAD CORROSION RESISTING STEEL, 95 KSI Fsu

SPECIFICATION SHEET NUMBER
MS21141 31 MAR 1994 REV H

SUPERSEDING
MS21141 G 24 DEC 90

AMSC- N/A FSC 5320

DISTRIBUTION STATEMENT
A. Approved for public release: distribution is unlimited

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE