FED. SUP. CLASS
4730

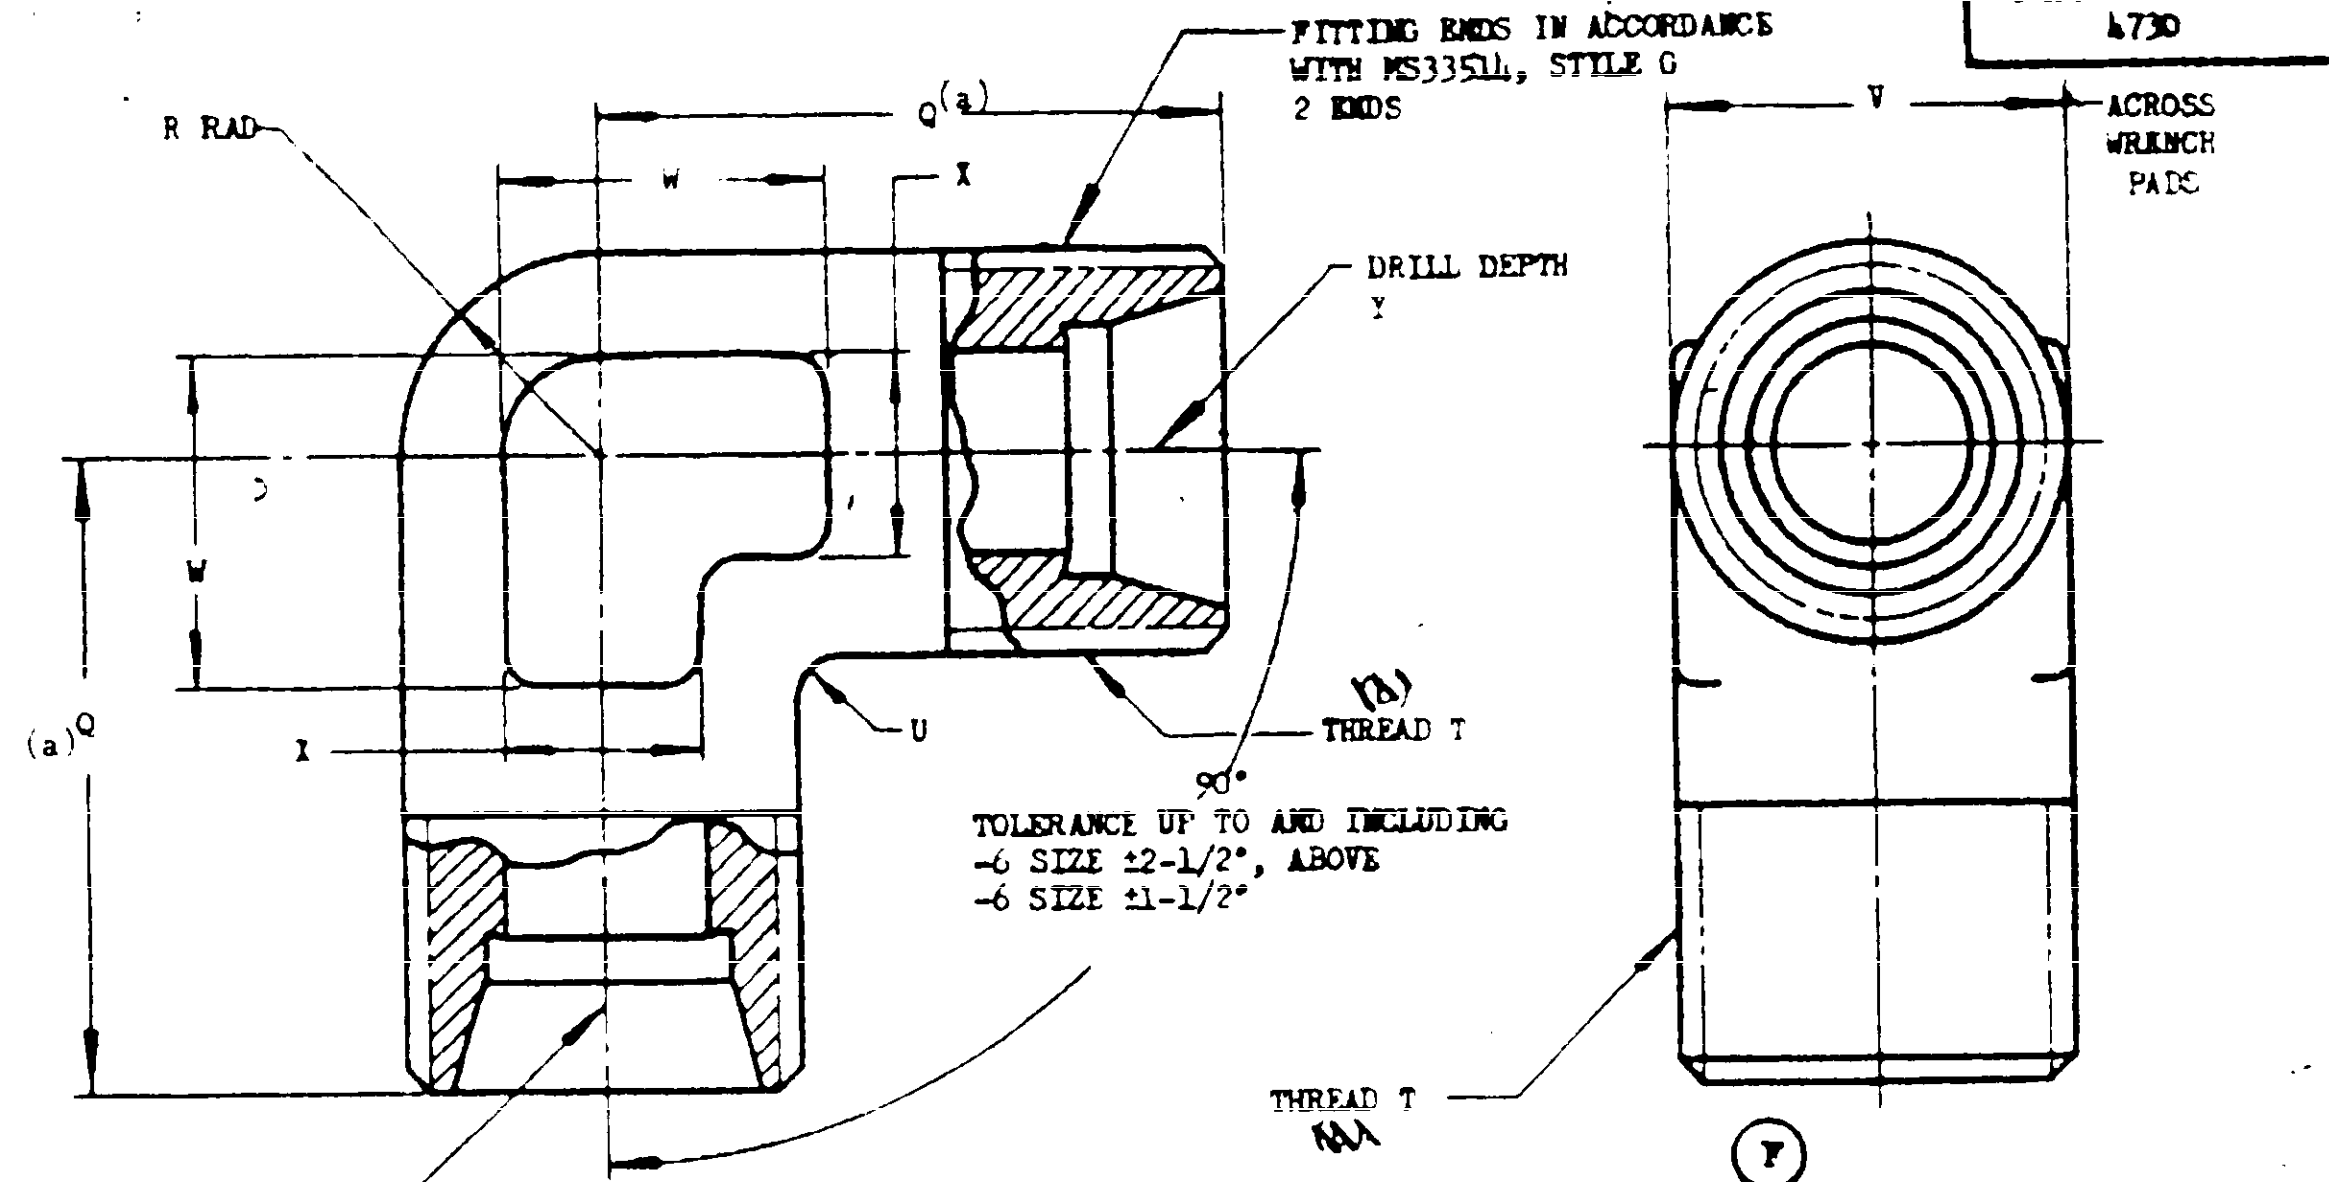

FITTING ENDS IN ACCORDANCE WITH MS33514, STYLE G 2 ENDS
R RAD
Q(a)
W
X
V
ACROSS WRENCH PADS
DRILL DEPTH Y
D
W
(a)Q
X
U
(b) THREAD T
90°
TOLERANCE UP TO AND INCLUDING -6 SIZE ±2-1/2°, ABOVE -6 SIZE ±1-1/2°
THREAD T
(b)
F
DRILL DEPTH Y

DASH NO.	TUBE OD	(b) THREAD T MIL-S-8879	(a) Q +3/64 -0	R RAD	U RAD	V	W APPROX	X APPROX	Y +3/64 -0	WT LB MAX STEEL	AL ALLOY	TI ALLOY
-2	1/8	.3125-24 UNJF-3A	3/4	5/32	1/16	5/16	5/16	3/16	25/32	.040	.014	.023
-3	3/16	.3750-24 UNJF-3A	13/16	3/16		3/8		1/4	27/32	.056	.020	.032
-4	1/4	.4375-20 UNJF-3A	7/8	7/32		7/16	3/8		59/64	.062	.022	.035
-5	5/16	.5000-20 UNJF-3A	15/16	1/4		1/2	1/2	5/16	63/64	.086	.031	.049
-6	3/8	.5625-18 UNJF-3A	1-1/32	9/32	3/32	9/16			1-1/16	.104	.037	.060
-8	1/2	.7500-16 UNJF-3A	1-1/4	3/8		3/4	5/8	7/16	1-5/16	.191	.064	.110
-10	5/8	.8750-14 UNJF-3A	1-13/32	7/16		7/8	3/4	7/16	1-15/32	.258	.087	.158
-12	3/4	1.0625-12 UNJ-3A	1-9/16	17/32		1-1/16	7/8	1/2	1-5/8	[illegible]	.135	[illegible]
-16	1	1.3125-12 UNJ-3A	1-23/32	21/32	1/8	1-5/16	1-1/16	5/8	1-27/32	.535	.200	.308
-20	1-1/4	1.6250-12 UNJ-3A	1-7/8	13/16		1-5/8	1-1/4	3/4	2	.792	.265	.456
-24	1-1/2	1.8750-12 UNJ-3A	[illegible]	[illegible]		1-7/8	[illegible]	7/8	2-5/16	1.262	[illegible]	[illegible]
-32	2	[illegible]	2-7/16	1-1/4	[illegible]	[illegible]	2	1-3/16	[illegible]	[illegible]	1.125	1.766

(a) AT THE OPTION OF THE MANUFACTURER [illegible] MAY BE 1/64 [illegible] THAN THE [illegible] SPECIFIED, WITH THE PROVISION THAT EACH DIMENSION [illegible] HALF 1/64 LESS THAN THE DIMENSION SPECIFIED.

~~(b) PARTS WITH THREADS IN ACCORDANCE WITH MIL-S-7742 OF THE SAME THREAD SIZE, PITCH AND TOLERANCE CLASS ARE ACCEPTABLE FOR PROCUREMENT UNTIL [illegible], BUT PARTS WITH MIL-S-7742 THREADS WILL NOT BE PROCURED THEREAFTER. EXISTING STOCKS ARE TO BE USED UNTIL EXHAUSTED.~~

1. MATERIAL: CARBON STEEL - FORGINGS
   ALUMINUM ALLOY - FORGINGS
   CORROSION RESISTANT STEEL - FORGINGS
   TITANIUM ALLOY - FORGINGS
   } SEE PROCUREMENT SPECIFICATION.
   NOTE: PARTS MADE FROM 1137 OR 1141 FORGINGS QUALIFIED TO MIL-F-18280C SHALL NOT BE SUPPLIED AFTER 30 JUNE 1984.
2. FINISH: SEE PROCUREMENT SPECIFICATION
3. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.
4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ±1/64.

Ⓕ DENOTES CHANGES

User activities: Navy - OS
Army - OL, CR, ME, AT

Review activities: Navy - . . .
USAF - . . 11
Army - AR, MI
DLA - CS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 4 Oct 51 REVISED Ⓐ 28 Jun 54 Ⓑ 2 May 56 Ⓒ 13 Nov 58 Ⓓ 27 June 69 Ⓔ 26 JUNE 1981 Ⓕ 22 JUNE 84

P.A. Navy - AS Other Cust USAF - 99 Army-AV	INTERNATIONAL INTEREST SEE NOTE 7	TITLE ELBOW, FLARELESS TUBE, 90°	MILITARY STANDARD MS21904
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 61 672-1 (Coordinated)
ASO use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PROJECT NO. 4730-0663

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T14:40Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

5. PART NUMBERS:
NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.
ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (2024).
ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).
~~ADD C AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 302, 303, 304, 316, OR 321~~.
ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.
ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.
ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE ~~304L AND~~ 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL AFTER 27 JUNE 1969.
ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V).

EXAMPLES OF PART NUMBERS:
MS21904-4 - ELBOW, 1/4 TUBING, CARBON STEEL.
MS21904D4 - ELBOW, 1/4 TUBING, ALUMINUM ALLOY (2024).
MS21904W4 - ELBOW, 1/4 TUBING, ALUMINUM ALLOY (7075).
MS21904J4 - ELBOW, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.
MS21904K4 - ELBOW, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.
MS21904-4S - ELBOW, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 347.
MS21904-4T - ELBOW, 1/4 TUBING, TITANIUM ALLOY (6AL-4V).

6. ~~PARTS CODED C ARE INACTIVE FOR DESIGN AFTER 27 JUNE 1969. PARTS CODED C MAY BE USED UNTIL STOCKS ARE EXHAUSTED. PARTS CODED J OR K MAY BE USED IN LIEU OF PARTS CODED C.~~
ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED J, K, OR S (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

7. CERTAIN PROVISIONS (SCREWS THREADS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION, OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

8. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

10. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

User activities:
Navy - OS
Army - GL, CR, ME, AT

Review activities:
Navy -
USAF - 11
Army - AR, MI
DLA - CS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 4 Oct 51 REVISED (F) FOR CHANGES SEE SHEET 1

P.A. Navy - AS Other Cust USAF - 99 Army-AV	INTERNATIONAL INTEREST SEE NOTE 7	TITLE ELBOW, FLARELESS TUBE, 90°	MILITARY STANDARD MS21904
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 57 672-1 (Coordinated)
ASG use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:40Z
Check the source to verify that this is the current version before use.