INCH-POUND

MS25165F
w/ Amendment 1
27July 2021
SUPERSEDING
MS25165F
2 December 2010

DETAIL SPECIFICATION SHEET

KNOB, POINTER, ILLUMINATED, SMALL (ASG)

Inactive for new design after 23 July 1997.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and procurement specification NASM25049.

INCHES	MM
.001	0.03
.016	0.41
.040	1.02
.062	1.57
.107	2.72
.125	3.18
.127	3.23
.160	4.06
.164	4.17
.188	4.78
.223	5.58
.250	6.35
.253	6.43
.312	7.92
.380	9.65
.500	12.70
.531	13.49
.620	15.75
.625	15.88
.719	18.26
.812	20.62
1.250	31.75

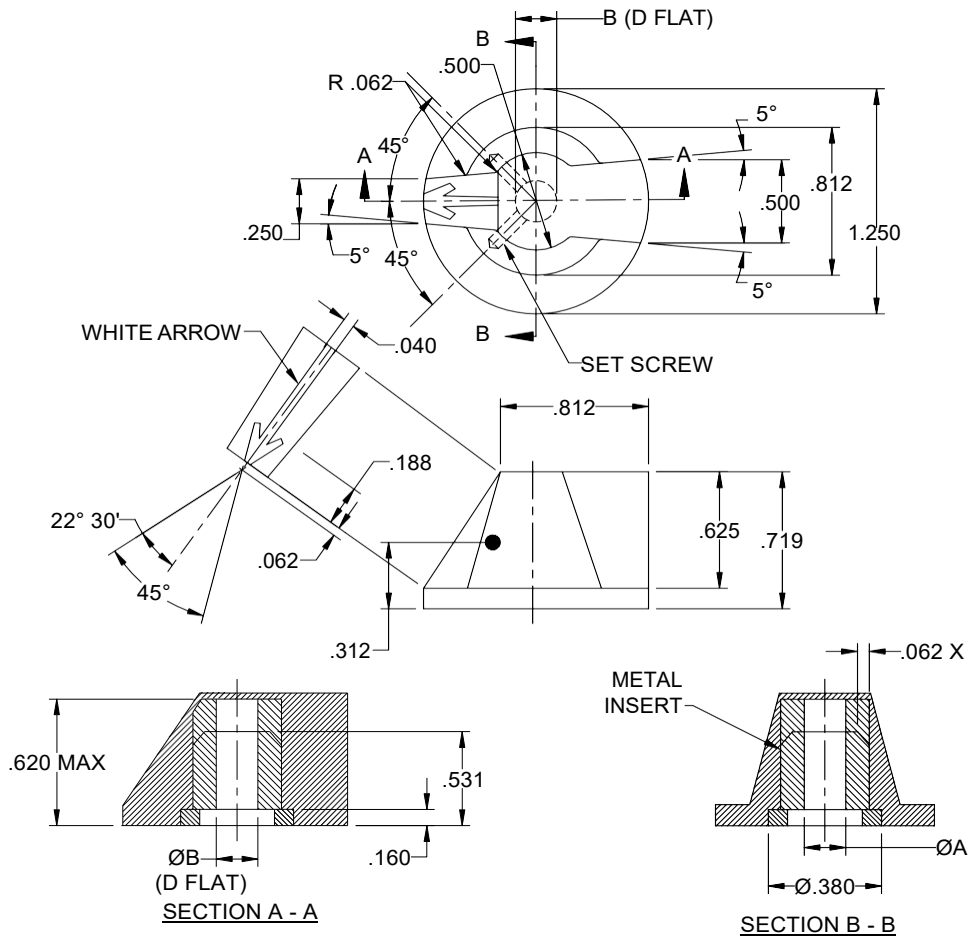


FIGURE I. Knob.

AMSC N/A

FSC 5355

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.

TABLE I. Part Numbers and Dimensions.

MIL - PART NUMBER	B ± .001	A ± .001	SHAFT SIZE	COLOR
MS25165-1	.223	.253	.250	GRAY
MS25165-2	.107	.127	.125	GRAY
MS25165-3	.223	.253	.250	BLACK
MS25165-4	.107	.127	.125	BLACK

Notes:

1 Dimensions are in inches.

2 Unless otherwise specified, tolerance is ± .016 (.41 mm), angle ±2º 0’.

3 Metric equivalents (to the nearest .01 mm) are given on figure 1 for general information only and are based upon 1 inch = 25.4 mm.

4 For design feature purposes, this standard takes precedence over procurement documents referenced herein.

5 Referenced documents shall be of the issue in effect on the date of invitation for bid.

6 Material: Knob, transparent thermoplastic. Insert, brass per ASTM B36/36M. Setscrew, CRES per SAE-AMS-S-7720.

7 Finish: Knob, color group grey or black, ID number 36231 or 37038 per SAE-AMS-STD-595. Index line, color group white, ID number 37875 per SAE-AMS-STD-595. Insert, nickel plate per SAE-AMS-QQ-N-290, bright finish, Class 2, Grade G.

8 Percent transmittance 12.0 ±3%.

9 There shall be no light leak around the setscrew.

10 Bottom surface of the knob shall be polished.

11 All outside corners and inside fillets shall have a .04 (1.02 mm) radius.

12 Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Concluding Material

Custodians:
Army - CR
Navy - AS
Air Force – 11

Preparing Activity:
DLA - CC

(Project 5355-2021-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:04Z
Check the source to verify that this is the current version before use.