INCH-POUND

MS27469H
w/AMENDMENT 1
27 Aug 2024
SUPERSEDING
MS27469H
26 August 2011

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, WALL MOUNTING FLANGE, SOLDER TYPE, HERMETIC SEAL, SERIES I

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.


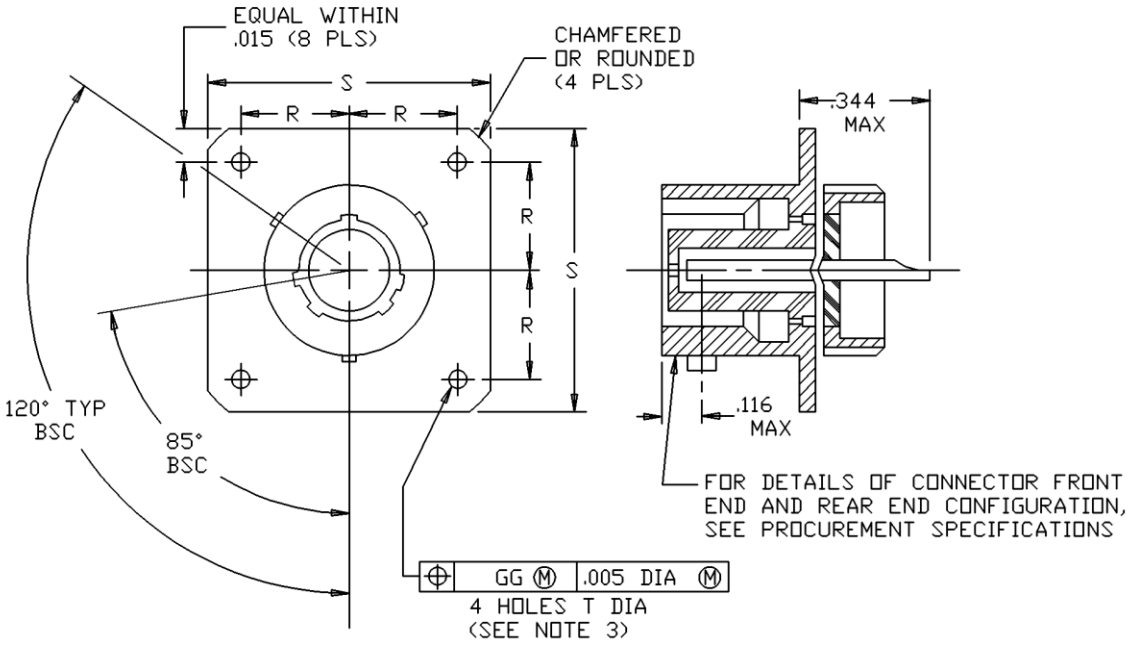


FIGURE 1. Receptacle, class Y.

AMSC N/A FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

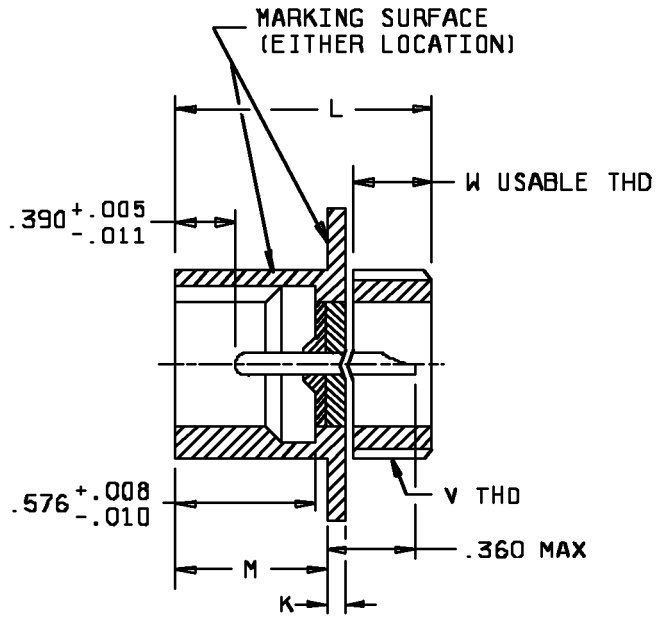

Shell size	K + .031 - .000	L max	M + .031 - .000	R BSC	S ± .016	T dia + .010 - .005	W min full THD	V THD Class 2A UNEF (plated)
9	.062	1.093	.659	.3595	.938	.128	.250	.6875 – 24
11				.406	1.031			.8125 – 20
13				.453	1.125			.9375 – 20
15				.4845	1.219			1.0625 – 18
17				.531	1.312			1.1875 – 18
19				.578	1.438			1.3125 – 18
21				.625	1.562			1.4375 – 18
23				.6875	1.688	.147		1.5625 – 18
25				.750	1.812			1.6875 – 18

FIGURE 1. Receptacle, class Y - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.128	3.25	.4845	12.31	1.031	26.19
.008	0.20	.147	3.73	.531	13.49	1.093	27.76
.010	0.25	.250	6.35	.576	14.63	1.125	28.58
.011	0.28	.312	7.92	.578	14.68	1.219	28.68
.015	0.38	.344	8.74	.625	15.88	1.312	33.32
.016	0.41	.3595	9.13	.659	16.74	1.438	36.53
.031	0.79	.390	9.91	.6875	17.46	1.562	39.67
.062	1.57	.406	10.31	.750	19.05	1.688	42.88
.116	2.95	.453	11.51	.938	23.83	1.812	46.02


NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. The gauge features for GG shall be .010 (0.25 mm) smaller than the MMC size at basic location.
4. For main keyway and keyway positions, see MIL-DTL-38999.

FIGURE 1. Receptacle, class Y - Continued.

REQUIREMENTS:

Dimensions and configuration: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
Mating connectors: MS27467, MS27661 and MS27653.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

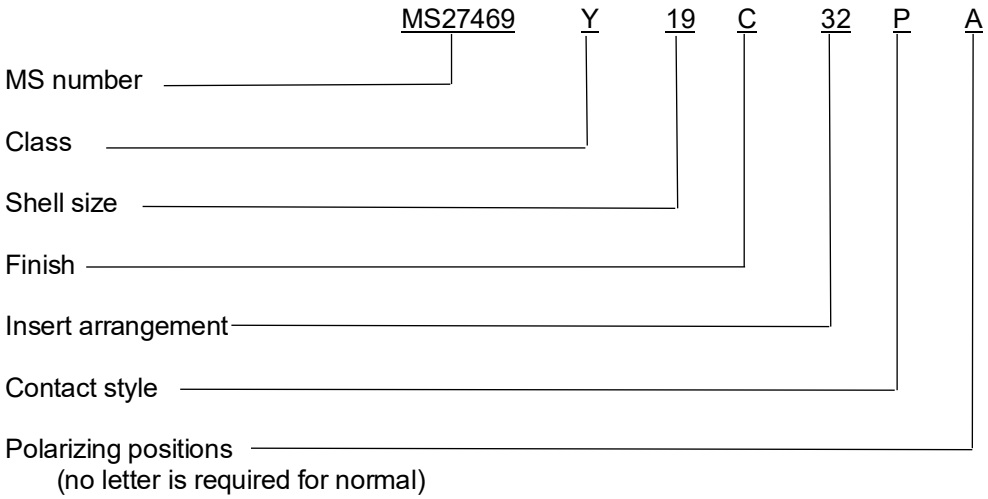

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MIL-STD-1560
MS27467
MS27661
MS27653

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - AS
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project: 5935-2024-156)

Review activities:
Army - AR, MI
Navy - EC, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.