FED SUP CLASS
5930

APPROVED 15 Sep 1970 REVISED Ⓐ 22 Apr 1971 Ⓑ 27 Jun 1972 Ⓒ 14 May 1974 Ⓓ 25 April 1975 Ⓔ 28 Sep 1987

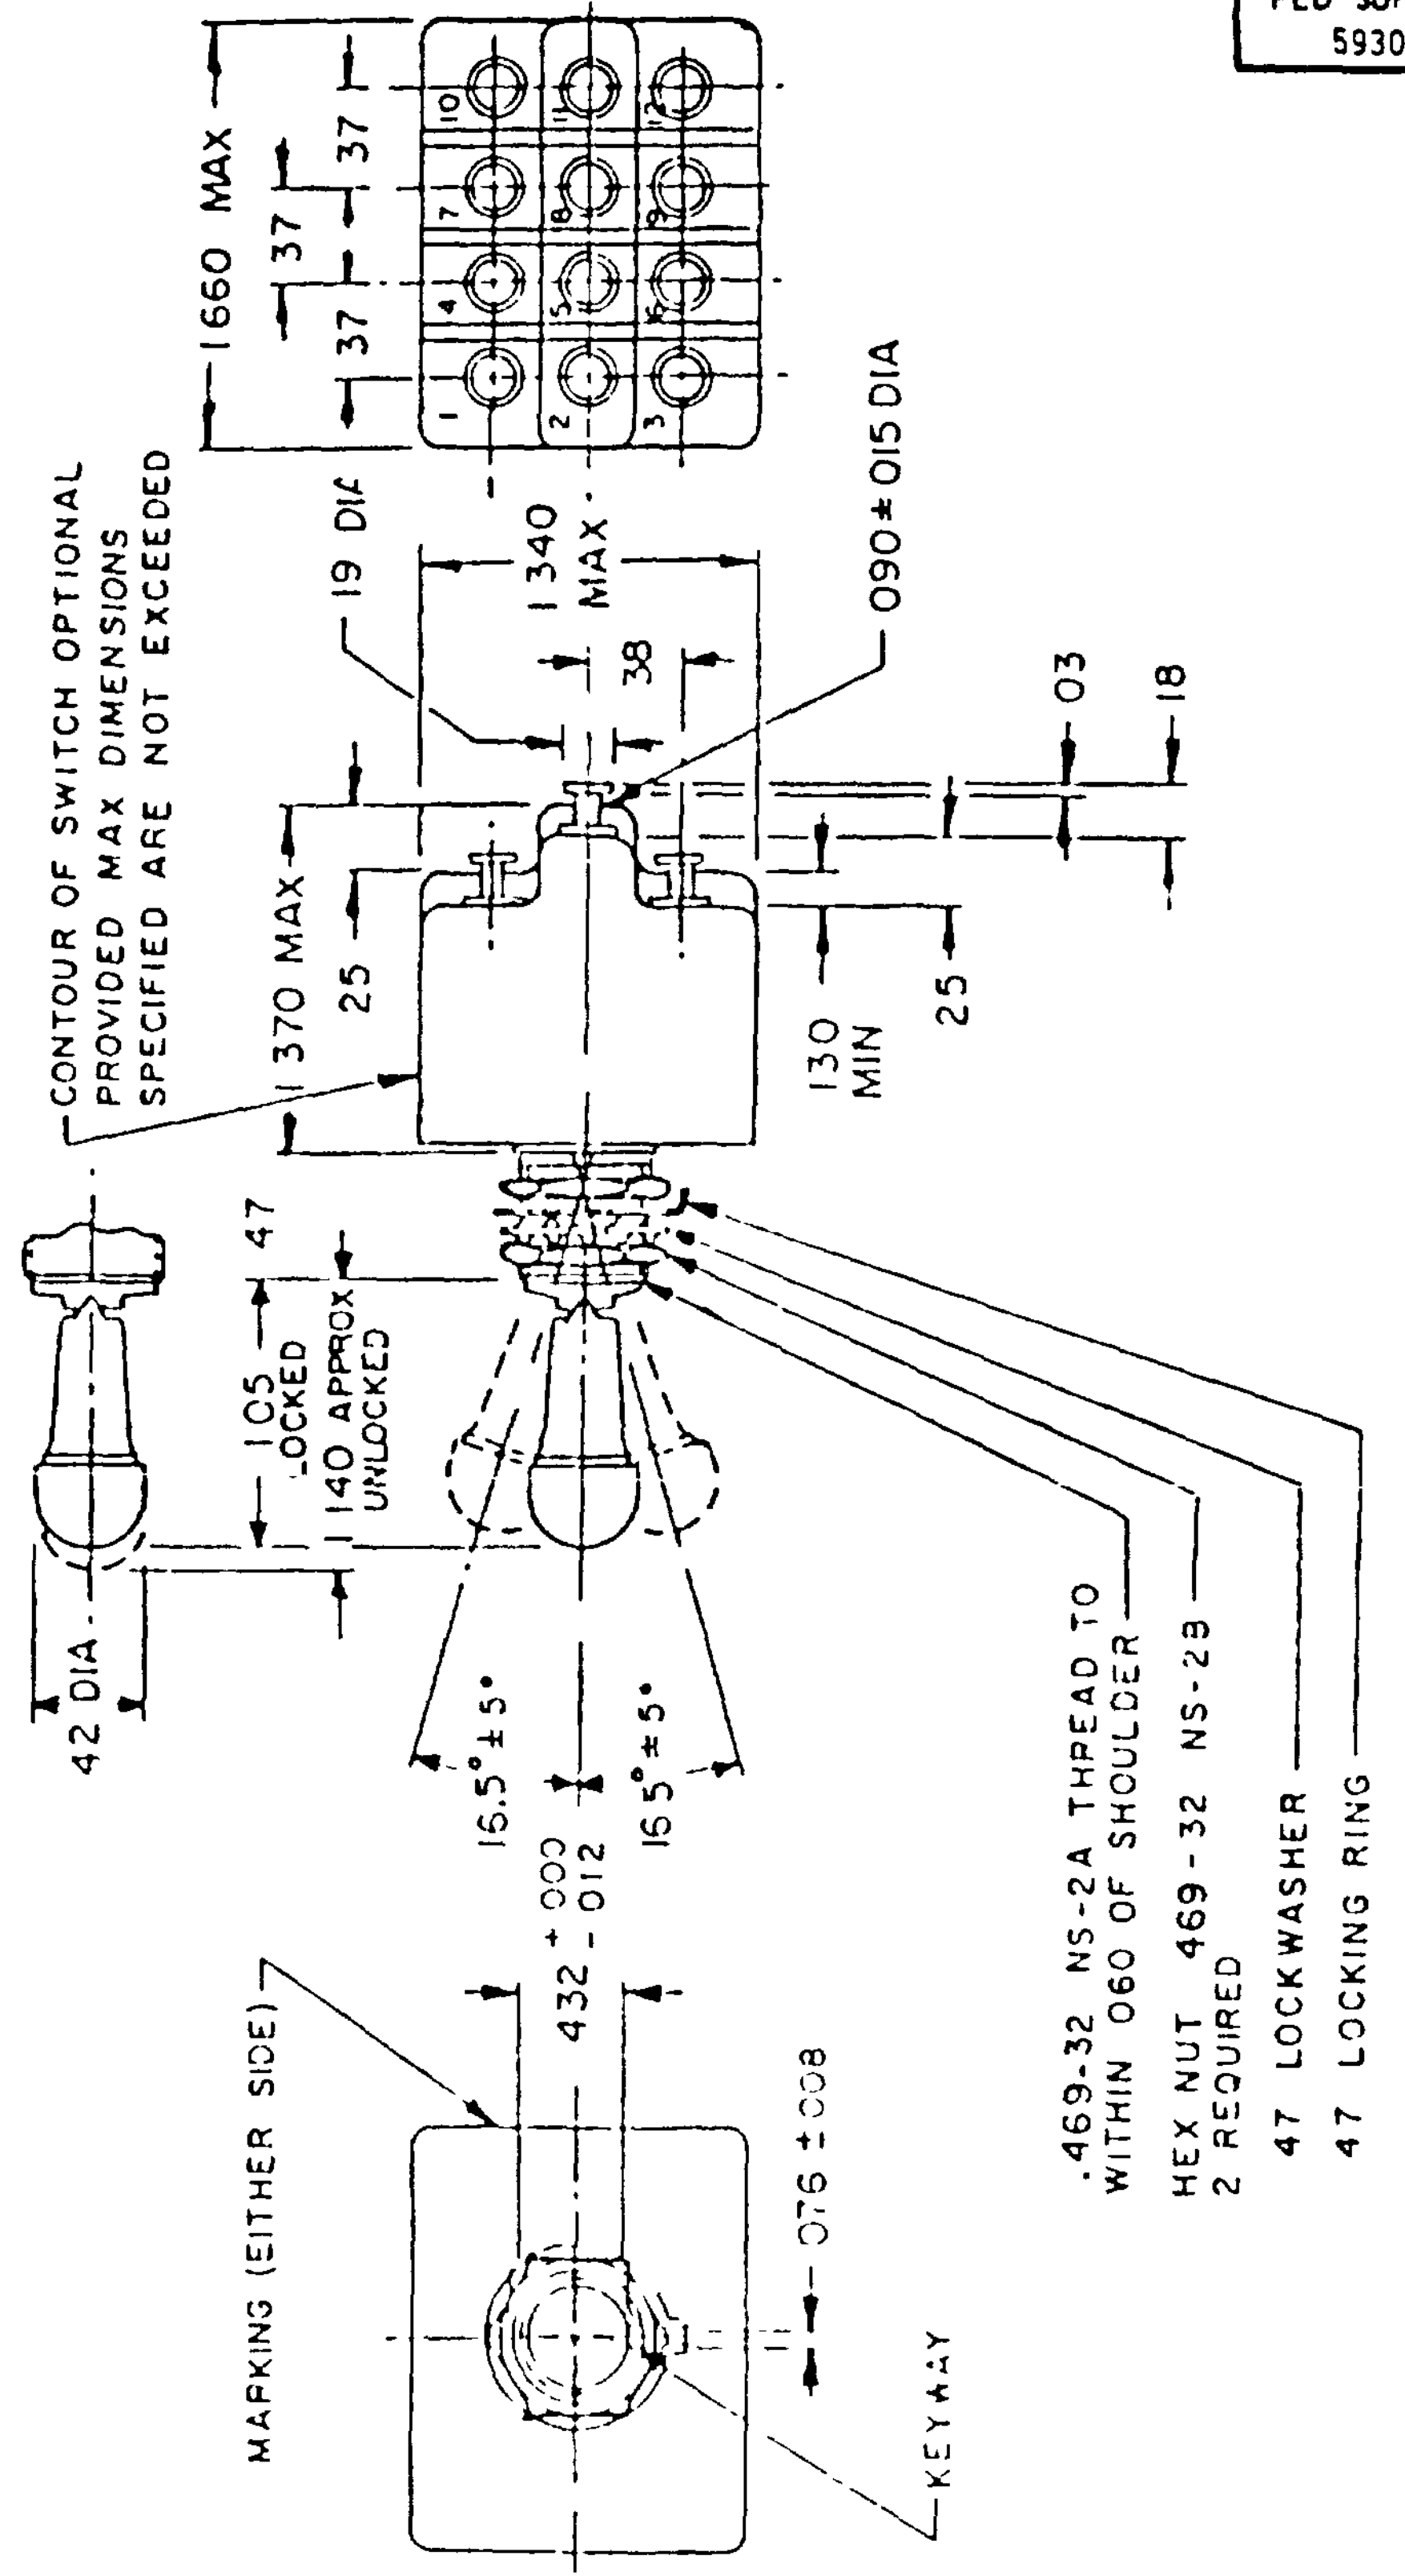

Ⓔ denotes changes

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AV, Navy - [illegible], Air Force - 99, DLA - ES

User activity: Air Force - 11

Cust Air Force - 85 Other Cust Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL	MILITARY STANDARD **MS27739**
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 1 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

AMSC N/A

5930-1358-19

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited

FED SUP CLASS
5930

Inches	mm	Inches	mm
.005	0.13	.25	6.4
.008	0.20	.37	9.4
.012	0.30	.38	9.7
.015	0.38	.42	10.7
.020	0.51	.432	10.97
.03	0.8	.469	11.91
.060	1.52	.47	11.9
.076	1.93	1.05	26.7
.090	2.29	1.140	28.96
.130	3.30	1.370	34.80
.18	4.6	1.660	42.16
.19	4.8		

NOTES

1. Dimensions are inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ±.020 (0.51 mm) for two place decimals and ±.005 (0.13 mm) for three place decimals
4. For hardware detail specifications, see appendix of MIL-S-3950
5. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever.
6. Maximum weight is 0.23 pound
7. Locking arrangement Positive locking shall be accomplished and shall prevent motion of the toggle lever until the locking mechanism is manually released
8. The force required to release the locking mechanism shall be 3 to 5 pounds
9. The locking means at the top of the toggle bushing shall be capable of withstanding a torque of 20 inch-pounds applied in both directions immediately following the humidity test
10. Part number example MS27739-21A (locking combination 'A')
11. Ⓔ In the event of a conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence.
12. Ⓔ Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity Air Force - 11

APPROVED 15 Sep 1970 REVISED Ⓔ for changes see page 2

P A Air Force - 85 Other Cust Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL	MILITARY STANDARD MS27739
Procurement Specification MIL-S-3950		SUPERSEDES	PAGE 2 OF 4

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities
Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity
Air Force - 11

FED SUP CLASS
5930

Locking combinations

A



LOCKED IN THREE POSITIONS

B



LOCKED IN CENTER AND DOWN POSITIONS (KEYING SIDE)

D



LOCKED OUT OF CENTER POSITION

E



LOCKED IN CENTER POSITION

F



LOCKED IN UP POSITION (OPPOSITE KEYING)

G



LOCKED IN DOWN POSITION (KEYING SIDE)

H



LOCKED OUT OF CENTER AND DOWN POSITION (KEYING SIDE)

J



LOCKED OUT OF CENTER AND UP POSITION (OPPOSITE KEYING)

K



LOCKED IN CENTER AND UP POSITION (OPPOSITE KEYING)

L



LOCKED OUT OF DOWN POSITION (KEYING SIDE)

M



LOCKED OUT OF AND INTO UP POSITION (OPPOSITE KEYING)

N



LOCKED OUT OF UP POSITION (OPPOSITE KEYING)

P



LOCKED OUT OF AND INTO DOWN POSITION (KEYING SIDE)

FIGURES A THROUGH P DO NOT REPRESENT DETAILS OF CONSTRUCTION. THEY SCHEMATICALLY ILLUSTRATE LOCKING CONFIGURATIONS AND MOMENTARY POSITIONS

APPROVED 15 Sep 1970 **REVISED** Ⓛ For changes see page 2

P A Air Force - 85 Other Cust Army - ER Navy - AS	International interest	TITLE SWITCH, TOGGLE, FOUR POLE, ENVIRONMENTALLY SEALED, LEVER-LOCK, SOLDER TERMINAL	**MILITARY STANDARD** **MS27739**
Procurement Specification MIL-S-3950		SUPERSEDES	**PAGE** 3 **OF** 4

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Review activities
Army - AV
Navy - EC
Air Force - 99
DLA - ES

User activity
Air Force - 11

FED SUP CLASS
5930

Detail requirements

MS part number	Available locking combinations	Circuit with toggle lever in			Current capacity (amperes) 28 volts dc			Current capacity (amperes) 115 volts, 60 and 400 hertz ac		
		Keying side	Center	Opposite keying side	Lamp-load circuit	Resistive circuit	Inductive circuit	Lamp-load circuit	Resistive circuit	Inductive circuit
MS27739-1	All	1-2 4-5 7-8 On 10-11	2-3 4-5 7-8 On 11-12	2-3 5-6 8-9 On 11-12	5	20	12	4	15	15
MS27739-2	E, F, K, L, M, N	1-2 Mom. 4-5 7-8 on 10-11	2-3 4-5 7-8 On 11-12	2-3 5-6 8-9 On 11-12	4	18	10	2	11	8
MS27739-3	E, L, N	1-2 Mom. 4-5 7-8 on 10-11	1-2 4-5 7-8 On 11-12	2-3 Mom. 5-6 8-9 On 11-12						
MS27739-21	All	1-2 7-8 4-5 On 10-11	Off	2-3 8-9 5-6 On 11-12	5	20	12	4	15	15
MS27739-22	D, F, G	Off	None	2-3 8-9 5-6 On 11-12						
MS27739-23	D, F, G	1-2 7-8 4-5 On 10-11	None	2-3 8-9 5-6 On 11-12						
MS27739-24	E, F, K, M	None	Off	2-3 8-9 5-6 On 11-12						
MS27739-25	F	None	Mom off	2-3 8-9 5-6 On 11-12	4	18	10	2	11	8
MS27739-26	F	1-2 Mom. 7-8 4-5 on 10-11	None	2-3 8-9 5-6 On 11-12						
MS27739-27	E, L, N	1-2 Mom. 7-8 4-5 on 10-11	Off	2-3 Mom. 8-9 5-6 on 11-12						
MS27739-28	E	1-2 Mom. 7-8 4-5 on 10-11	Off	None						
MS27739-29	F	Mom. off	None	2-3 8-9 5-6 On 11-12						
MS27739-30	E	1-2 Mom 7-8 4-5 on 10-11	None	Off						
MS27739-31	E, F, K, L, M, N	1-2 Mom. 7-8 4-5 on 10-11	Off	2-3 8-9 5-6 On 11-12						
MS27739-32	E	None	1-2 7-8 4-5 On 10-11	2-3 Mom 8-9 5-6 on 11-12						
MS27739-33	E, F, K, M	None	1-2 7-8 4-5 On 10-11	2-3 8-9 5-6 On 11-12	5	20	12	4	15	15

APPROVED 15 Sep 1970 REVISED Ⓔ For change, see page 2

P A
Air Force - 85
Other Cust
Army - ER
Navy - AS

International interest

TITLE
SWITCH, TOGGLE, FOUR POLE,
ENVIRONMENTALLY SEALED,
LEVER LOCK, SOLDER TERMINAL

MILITARY STANDARD

MS27739

Procurement Specification
MIL-S-3950

SUPERSEDES

PAGE 4 OF 4

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE