FED. SUP CLASS
5305

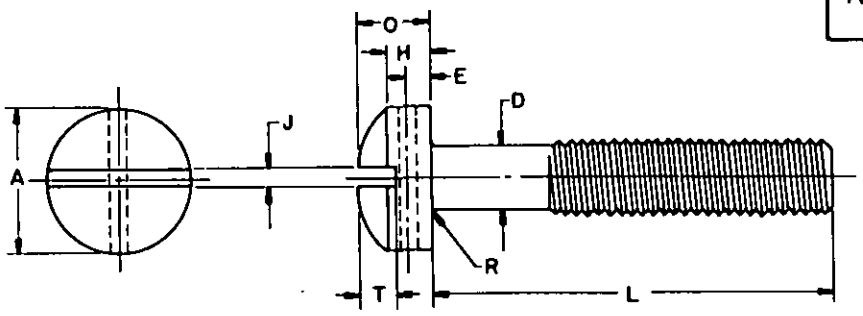



TABLE I

| NOMINAL SIZE | | (#2) .086 | (#4) .112 | (#6) .138 | (#8) .164 | (#10) .190 | (1/4) .250 | (5/16) .3125 | (3/8) .375 |
|---|---|---|---|---|---|---|---|---|---|
| THREADS PER INCH, UNC-2A | | 56 | 40 | 32 | 32 | 24 | 20 | 18 | 16 |
| D BODY DIAMETER | MAX | .0860 | .1120 | .1380 | .1640 | .1900 | .2500 | .3125 | .3750 |
| | MIN | .0717 | .0925 | .1141 | .1399 | .1586 | .2127 | .2712 | .3287 |
| A HEAD DIAMETER | MAX | .140 | .183 | .226 | .270 | .313 | .414 | .518 | .622 |
| | MIN | .124 | .166 | .208 | .250 | .292 | .389 | .490 | .590 |
| H HEAD SIDE HEIGHT | MAX | .062 | .079 | .096 | .113 | .130 | .170 | .211 | .253 |
| | MIN | .055 | .072 | .089 | .106 | .123 | .161 | .201 | .242 |
| O TOTAL HEAD HEIGHT | MAX | .083 | .107 | .132 | .156 | .180 | .237 | .295 | .355 |
| | MIN | .070 | .094 | .118 | .141 | .165 | .219 | .276 | .333 |
| J SLOT WIDTH | MAX | .031 | .039 | .048 | .054 | .060 | .075 | .084 | .094 |
| | MIN | .023 | .031 | .039 | .045 | .050 | .064 | .072 | .081 |
| T SLOT DEPTH | MAX | .030 | .038 | .045 | .065 | .075 | .102 | .130 | .154 |
| | MIN | .022 | .030 | .035 | .054 | .064 | .087 | .110 | .134 |
| E DRILL LOCATION | NOM | .026 | .035 | .043 | .043 | .043 | .062 | .078 | .094 |
| DRILLED HOLE SIZE | NOM | .031 | .037 | .046 | .046 | .046 | .062 | .070 | .070 |
| R RADIUS | MAX | .013 | .017 | .021 | .025 | .029 | .038 | .047 | .056 |
| TENSILE STRENGTH, LB-MIN | | 300 | 480 | 730 | 1120 | 1400 | 2540 | 4190 | 6200 |

| L LENGTH | TOLERANCE | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
|---|---|---|---|---|---|---|---|---|---|
| .125 | +0 -.031 | 201 | 211 | 224 | 239 | | | | |
| .188 | | 202 | 212 | 225 | 240 | 258 | | | |
| .250 | | 203 | 213 | 226 | 241 | 259 | | | |
| .312 | | 204 | 214 | 227 | 242 | 260 | 276 | | |
| .375 | | 205 | 215 | 228 | 243 | 261 | 277 | 292 | |
| .438 | | 206 | 216 | 229 | 244 | 262 | 278 | 293 | |
| .500 | | 207 | 217 | 230 | 245 | 263 | 279 | 294 | 307 |
| .625 | | 208 | 218 | 231 | 246 | 264 | 280 | 295 | 308 |
| .750 | | 209 | 219 | 232 | 247 | 265 | 281 | 296 | 309 |
| .875 | | 210 | 220 | 233 | 248 | 266 | 282 | 297 | 310 |
| 1.000 | | | 221 | 234 | 249 | 267 | 283 | 298 | 311 |
| 1.250 | | | 222 | 235 | 250 | 268 | 284 | 299 | 312 |
| 1.500 | +0 -.062 | | 223 | 236 | 251 | 269 | 285 | 300 | 313 |
| 1.750 | | | | 237 | 252 | 270 | 286 | 301 | 314 |
| 2.000 | | | | 238 | 253 | 271 | 287 | 302 | 315 |
| 2.250 | | | | | 254 | 272 | 288 | 303 | 316 |
| 2.500 | +0 -.094 | | | | 255 | 273 | 289 | 304 | 317 |
| 2.750 | | | | | 256 | 274 | 290 | 305 | 318 |
| 3.000 | | | | | 257 | 275 | 291 | 306 | 319 |

REVIEW: EL, ME, EA, IS, AV, MA, AT
USER: SH, CL, MA, YD, PA, WV, MC

tary standard is approved for use by all Departments and Agencies
partment of Defense. Selection for all new engineering and design
-ions and for repetitive use shall be made from this document, when applicable.

APPROVED 9 FEB 1954 REVISED (A) 29 JULY 1965 (B) 14 JUN 1976

(B) ENTIRE STANDARD REVISED

| P.A. WC<br>Other Cust AS 82 | TITLE<br>SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNC-2A | MILITARY STANDARD<br>MS35275 |
|---|---|---|
| PROCUREMENT SPECIFICATION<br>FF-S-92 | SUPERSEDES BCFX1.5, BCFX2.5, BCFX7.1 and in part AN500, MS35361, MS35366 and BCGX3.1 | SHEET 1 OF 4 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5305-1196

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

NOTES:

1. MATERIAL: Steel, Corrosion Resisting, in accordance with Fed. Std. No. 66; AISI 302, 303, 304, 305, 316, or 384 (developed for cold heading), and having minimum ultimate tensile strength of 80,000 PSI.

2. TREATMENT: Passivation shall be in accordance with QQ-P-35.

3. MAGNETIC PERMEABILITY: These fasteners have a magnetic permeability of 2.0 maximum (air = 1.0) for a field strength of H = 200 oersteds using a magnetic indicator per MIL-I-17214.

4. THREADS: The threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.

5. THREAD LENGTH: Screws 2.00 inches long and shorter shall have complete threads extending to within two threads of the head, or closer if practicable. Longer screws shall have a minimum thread length of 1.50 inches.

6. DIMENSIONS: All dimensions are in inches unless otherwise specified.

7. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS35275-201

8. Drilled hole is to be approximately at right angles to the slot and may be permitted to break through the bottom of the slot. All sharp edges shall be removed.

9. Referenced documents shall be of the issue in effect on date of invitations for bid.

10. For design feature purposes, this standard takes precedence over procurement documents referherein.

REVIEW: CL, ME, EA, TD, AV, MI, AT
USER: SH, CL, MA, YD, MA, MV, MC

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, unless waived.

APPROVED 9 FEB 1954 REVISED (A) 29 JUL 1965 (B) FOR CHANGES

SHEET 1.

| | | |
|---|---|---|
| P.A. WC<br>Other Cust AS 82 | TITLE<br>SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNC-2A | MILITARY STANDARD<br>MS35275 |
| PROCUREMENT SPECIFICATION<br>FF-S-92 | SUPERSEDES: BCFX1.5, BCFX2.5, BCFX7.1 and in part AN500, MS35361, MS35366 and BCGX3.1 | SHEET 2 OF 4 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

## TABLE II
INTERCHANGEABILITY TABLE

The screws covered by the dash numbers given in original issue of this standard and AN500 in part, are cancelled/inactivated after the approval date of revision A indicated on this document. Use the dash numbers given in the preceding sheets. The cancelled screws cannot always replace the new screws and should be used until existing stocks are depleted. Use only the new screws for design and replacement. Replacement shall be in accordance with this table.

| PART NUMBERS | | | PART NUMBERS | | |
|---|---|---|---|---|---|
| CANCELLED | | SUPERSEDED BY | CANCELLED | | SUPERSEDED BY |
| MS35275-1 | | MS35275-201 | MS35275-61 | AN500-AD10-6 | MS35275-261 |
| -2 | AN500-AD2-3 | -202 | -62 | -AD10-7 | -262 |
| -3 | -AD2-4 | -203 | -63 | -AD10-8 | -263 |
| -4 | -AD2-5 | -204 | -64 | -AD10-10 | -264 |
| -5 | -AD2-6 | -205 | -65 | -AD10-12 | -265 |
| -6 | -AD2-7 | -206 | -66 | -AD10-14 | -266 |
| -7 | -AD2-8 | -207 | -67 | -AD10-16 | -267 |
| -8 | -AD2-10 | -208 | | -AD10-18 | No Replacement |
| -9 | -AD2-12 | -209 | -68 | -AD10-20 | -268 |
| -10 | | -210 | | -AD10-22 | No Replacement |
| | AD3-3 thru AD3-8 | No Replacement | -69 | -AD10-24 | -269 |
| | -AD3-10 | No Replacement | -70 | -AD10-28 | -270 |
| | -AD3-12 | No Replacement | -71 | -AD10-32 | -271 |
| -11 | | -211 | -72 | | -272 |
| -12 | -AD4-3 | -212 | -73 | -AD10-40 | -273 |
| -13 | -AD4-4 | -213 | -74 | | -274 |
| -14 | -AD4-5 | -214 | -75 | -AD10-48 | -275 |
| -15 | -AD4-6 | -215 | -76 | | -276 |
| -16 | -AD4-7 | -216 | -77 | -AD416-6 | -277 |
| -17 | -AD4-8 | -217 | -78 | -AD416-7 | -278 |
| -18 | -AD4-10 | -218 | -79 | -AD416-8 | -279 |
| -19 | -AD4-12 | -219 | -80 | -AD416-10 | -280 |
| -20 | | -220 | -81 | -AD416-12 | -281 |
| -21 | | -221 | -82 | -AD416-14 | -282 |
| -22 | | -222 | -83 | -AD416-16 | -283 |
| -23 | | -223 | | -AD416-18 | No Replacement |
| | AD5-3 thru AD5-8 | No Replacement | -84 | -AD416-20 | -284 |
| | -AD5-10 | No Replacement | | -AD416-22 | No Replacement |
| | -AD5-12 | No Replacement | -85 | -AD416-24 | -285 |
| -24 | | -224 | -86 | -AD416-28 | -286 |
| -25 | -AD6-3 | -225 | -87 | -AD416-32 | -287 |
| -26 | -AD6-4 | -226 | -88 | | -288 |
| -27 | -AD6-5 | -227 | -89 | -AD416-40 | -289 |
| -28 | -AD6-6 | -228 | -90 | | -290 |
| -29 | -AD6-7 | -229 | -91 | -AD416-48 | -291 |
| -30 | -AD6-8 | -230 | -92 | -AD516-6 | -292 |
| -31 | -AD6-10 | -231 | -93 | -AD516-7 | -293 |
| -32 | -AD6-12 | -232 | -94 | -AD516-8 | -294 |
| -33 | -AD6-14 | -233 | -95 | -AD516-10 | -295 |
| -34 | -AD6-16 | -234 | -96 | -AD516-12 | -296 |
| | -AD6-18 | No Replacement | -97 | -AD516-14 | -297 |
| -35 | -AD6-20 | -235 | -98 | -AD516-16 | -298 |
| | -AD6-22 | No Replacement | | -AD516-18 | No Replacement |
| -36 | -AD6-24 | -236 | -99 | -AD516-20 | -299 |
| -37 | -AD6-28 | -237 | | -AD516-22 | No Replacement |
| -38 | -AD6-32 | -238 | -100 | -AD516-24 | -300 |
| -39 | | -239 | -101 | -AD516-28 | -301 |
| -40 | | -240 | -102 | -AD516-32 | -302 |
| -41 | -AD8-4 | -241 | -103 | | -303 |
| -42 | -AD8-5 | -242 | -104 | -AD516-40 | -304 |
| -43 | -AD8-6 | -243 | -105 | | -305 |
| -44 | -AD8-7 | -244 | -106 | -AD516-48 | -306 |
| -45 | -AD8-8 | -245 | | -AD616-6 | No Replacement |
| -46 | -AD8-10 | -246 | | -AD616-7 | No Replacement |
| -47 | -AD8-12 | -247 | -107 | -AD616-8 | -307 |
| -48 | -AD8-14 | -248 | -108 | -AD616-10 | -308 |
| -49 | -AD8-16 | -249 | -109 | -AD616-12 | -309 |
| | -AD8-18 | No Replacement | -110 | -AD616-14 | -310 |
| -50 | -AD8-20 | -250 | -111 | -AD616-16 | -311 |
| | -AD8-22 | No Replacement | | -AD616-18 | No Replacement |
| -51 | -AD8-24 | -251 | -112 | -AD616-20 | -312 |
| -52 | -AD8-28 | -252 | | -AD616-22 | No Replacement |
| -53 | -AD8-32 | -253 | -113 | -AD616-24 | -313 |
| -54 | | -254 | -114 | -AD616-28 | -314 |
| -55 | | -255 | -115 | -AD616-32 | -315 |
| -56 | | -256 | -116 | | -316 |
| -57 | | -257 | -117 | -AD616-40 | -317 |
| -58 | | -258 | -118 | | -318 |
| -59 | -AD10-4 | -259 | -119 | -AD616-48 | -319 |
| -60 | -AD10-5 | -260 | | | |

REVIEWER: EL, ME, EA, IS, AV, MI, AT
USER: SH, GL, MU, YD, PA, WV, MC

APPROVED FEB 9, 1954 REVISED (A) 29 JUL 1965 (B) FOR CHANGES SEE SHEET 1.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, unless superseded.

| | | | |
|---|---|---|---|
| P.A. | WC | TITLE | MILITARY STANDARD |
| Other Cust | AS, 82 | SCREW, MACHINE—DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNC-2A | MS 35275 |
| PROCUREMENT SPECIFICATION | FF-S-92 | SUPERSEDES: BCFX1.5, BCFX2.5, BCFX7.1 and in part AN500, MS35361, MS35366 and BCGX3.1. | SHEET 3 OF 4 |

DD FORM 672-1 (Confidential)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.

REVIEW: GL, ME, EA, 15, AM, MI, AT
USER: SH, GL, MA, YD, PA, WV, MC

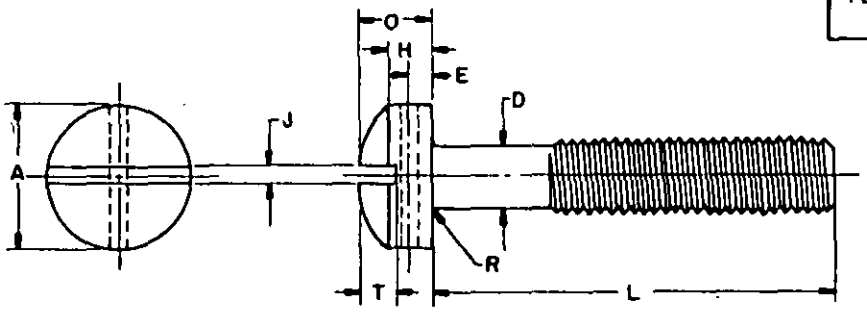



TABLE III
METRIC TRANSLATION OF TABLE I

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| NOMINAL SIZE | | MM | 2.184 | 2.845 | 3.505 | 4.166 | 4.826 | 6.350 | 7.938 | 9.525 |
| PITCH | | | .45 | .64 | .79 | .79 | 1.06 | 1.27 | 1.41 | 1.59 |
| D BODY DIAMETER | | MAX | 2.184 | 2.845 | 3.505 | 4.166 | 4.826 | 6.350 | 7.938 | 9.525 |
| | | MIN | 1.821 | 2.350 | 2.898 | 3.553 | 4.028 | 5.403 | 6.888 | 8.349 |
| A HEAD DIAMETER | | MAX | 3.556 | 4.648 | 5.740 | 6.858 | 7.950 | 10.516 | 13.157 | 15.799 |
| | | MIN | 3.150 | 4.216 | 5.283 | 6.350 | 7.417 | 9.881 | 12.446 | 14.986 |
| H HEAD SIDE HEIGHT | | MAX | 1.575 | 2.007 | 2.438 | 2.870 | 3.302 | 4.318 | 5.359 | 6.426 |
| | | MIN | 1.397 | 1.829 | 2.261 | 2.692 | 3.124 | 4.089 | 5.105 | 6.147 |
| O TOTAL HEAD HEIGHT | | MAX | 2.108 | 2.718 | 3.353 | 3.962 | 4.572 | 6.020 | 7.493 | 9.017 |
| | | MIN | 1.778 | 2.388 | 2.997 | 3.581 | 4.191 | 5.563 | 7.010 | 8.458 |
| J SLOT WIDTH | | MAX | .787 | .991 | 1.219 | 1.372 | 1.524 | 1.905 | 2.134 | 2.388 |
| | | MIN | .584 | .787 | .991 | 1.143 | 1.270 | 1.626 | 1.829 | 2.057 |
| T SLOT DEPTH | | MAX | .762 | .965 | 1.143 | 1.651 | 1.905 | 2.591 | 3.302 | 3.912 |
| | | MIN | .559 | .762 | .889 | 1.372 | 1.626 | 2.210 | 2.794 | 3.404 |
| E DRILL LOCATION | | NOM | .660 | .889 | 1.092 | 1.092 | 1.092 | 1.575 | 1.981 | 2.388 |
| DRILLED HOLE SIZE | | NOM | .787 | .940 | 1.168 | 1.168 | 1.168 | 1.575 | 1.778 | 1.778 |
| R RADIUS | | MAX | .330 | .432 | .533 | .635 | .737 | .965 | 1.194 | 1.422 |
| TENSILE STRENGTH, KN-MIN | | | 1.344 | 2.151 | 3.272 | 5.020 | 6.275 | 11.384 | 18.780 | 27.789 |
| L LENGTH | TOLERANCE | | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. | DASH NO. |
| 3.175 | | | 201 | 211 | 224 | 239 | | | | |
| 4.775 | | | 202 | 212 | 225 | 240 | 258 | | | |
| 6.350 | | | 203 | 213 | 226 | 241 | 259 | | | |
| 7.925 | | | 204 | 214 | 227 | 242 | 260 | 276 | | |
| 9.525 | | | 205 | 215 | 228 | 243 | 261 | 277 | 292 | |
| 11.125 | +0 | | 206 | 216 | 229 | 244 | 262 | 278 | 293 | |
| 12.700 | -.787 | | 207 | 217 | 230 | 245 | 263 | 279 | 294 | 307 |
| 15.875 | | | 208 | 218 | 231 | 246 | 264 | 280 | 295 | 308 |
| 19.050 | | | 209 | 219 | 232 | 247 | 265 | 281 | 296 | 309 |
| 22.225 | | | 210 | 220 | 233 | 248 | 266 | 282 | 297 | 310 |
| 25.400 | | | | 221 | 234 | 249 | 267 | 283 | 298 | 311 |
| 31.750 | | | | 222 | 235 | 250 | 268 | 284 | 299 | 312 |
| 38.100 | +0 | | | 223 | 236 | 251 | 269 | 285 | 300 | 313 |
| 44.450 | -1.575 | | | | 237 | 252 | 270 | 286 | 301 | 314 |
| 50.800 | | | | | 238 | 253 | 271 | 287 | 302 | 315 |
| 57.150 | | | | | | 254 | 272 | 288 | 303 | 316 |
| 63.500 | +0 | | | | | 255 | 273 | 289 | 304 | 317 |
| 69.850 | -2.388 | | | | | 256 | 274 | 290 | 305 | 318 |
| 76.200 | | | | | | 257 | 275 | 291 | 306 | 319 |

NOTE: All dimensions are in millimetres (mm), unless otherwise specified, and are based on an approximate conversion factor of 25.4mm equals one inch.

☆U.S. GOVERNMENT PRINTING OFFICE: 1976-603-766/5027

APPROVED 9 FEB 1954 REVISED (A) 29 JUL 1965 (B) FOR CHANGES SEE SHEET 1.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when available.

| | | |
|---|---|---|
| P.A. MC<br>Other Cust AS 82 | TITLE<br>SCREW, MACHINE-DRILLED FILLISTER HEAD, SLOTTED, CORROSION RESISTING STEEL, PASSIVATED, UNC-2A | MILITARY STANDARD<br>MS35275 |
| PROCUREMENT SPECIFICATION<br>FF-S-92 | SUPERSEDES: BCFX1.5, BCFX2.5, BCFX7.1 and in part AN500, MS35361, MS35366 and BCGX3.1 | SHEET 4 OF 4 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:13Z
Check the source to verify that this is the current version before use.