


FED. SUP CLASS
2320

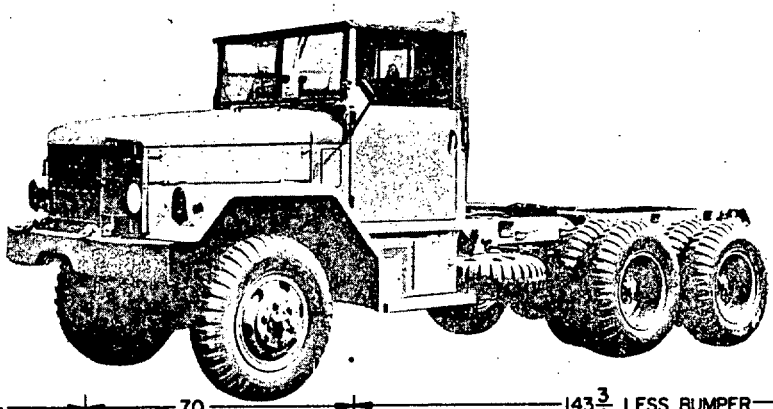

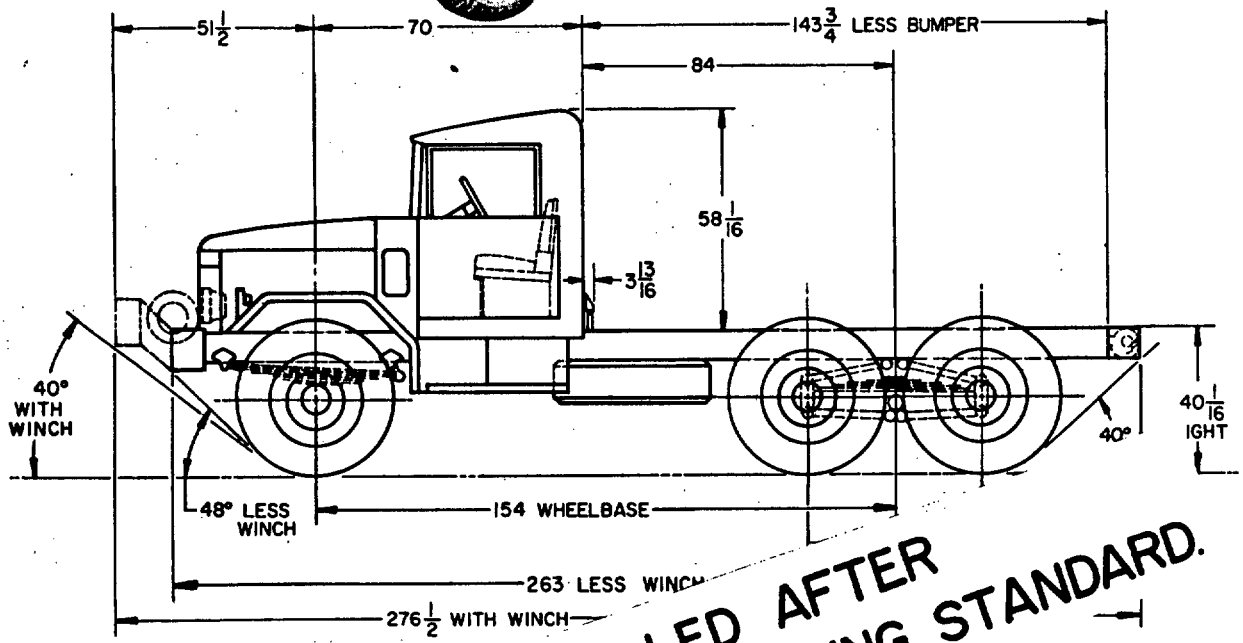

CANCELLED AFTER NO SUPERSEDING STANDARD.

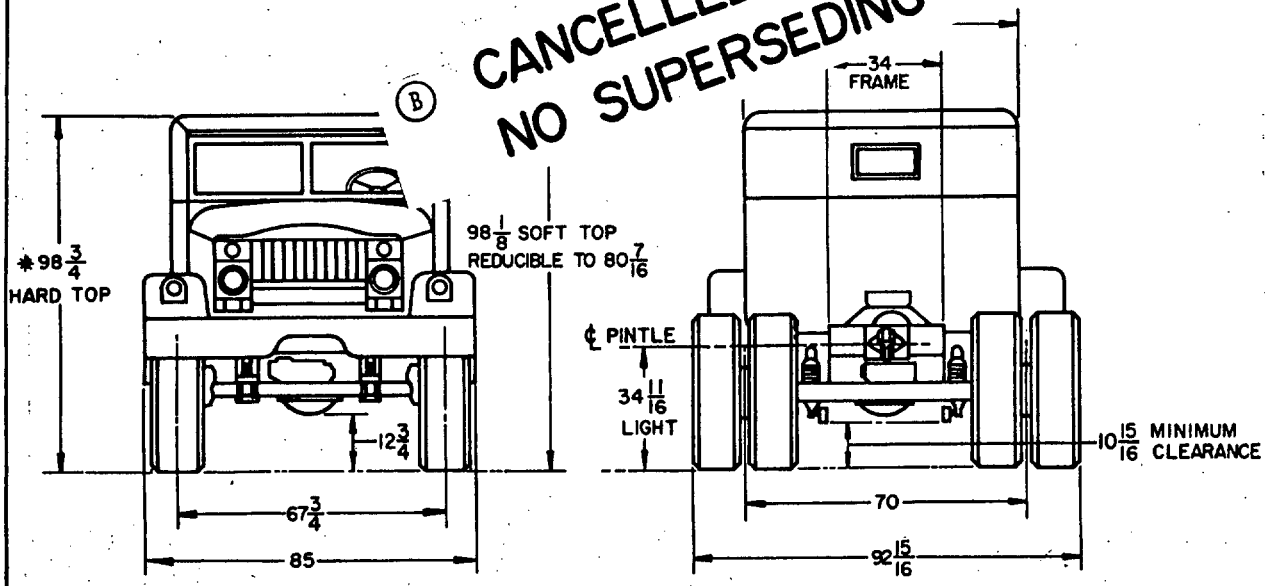

DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.

(A) ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING PARTS LIST	
MS 51392-1	8358196	WITH WINCH
MS 51392-2	7368524	LESS WINCH

REVIEW ACTIVITIES: ARMY-SM
USER ACTIVITIES: ARMY-EL; NAVY-YD; AF-26,84

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 15 DECEMBER 1961 REVISED (A) 18 OCTOBER 1965 (B) 5 June 1985

P.A. MO (ATAC)
Other Cust
NAVY-MC

TITLE
CHASSIS, TRUCK, MILITARY DESIGN, M45, 2-1/2 TON, 6X6, 154 INCH WHEELBASE

MILITARY STANDARD
MS 51392
SHEET 1 OF 2

PROCUREMENT SPECIFICATION
MIL-T-45362

SUPERSEDES:

DD FORM 1 SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT: CHASSIS AND CAB LESS PAYLOAD AND PERSONNEL.

	W/O W	W/W
FRONT AXLE	5190	5691
BOGIE	5335	5244
TOTAL	10525	10935 LBS

GROSS LOAD:

	W/O W	W/W
PAYLOAD		
CROSS COUNTRY	6980	6565
HIGHWAY	11980	11565 LBS

TOWED LOAD MAX:
CROSS COUNTRY 6000
HIGHWAY 10000 LBS

(REFERENCED WEIGHTS ARE FOR INFORMATION

ENGINE: 8757517
MODEL: OA 331
NO. OF CYL: SIX IN LINE
DISPLACEMENT: 331 BORE: 4 1/8
STROKE: 4 1/8
COMP. RATIO: 6.73:1
GOV. SPEED: 3400 RPM
MAX. BHP: 146 NET 127 @RPM 3400
MAX. TORQUE LB FT: 270 NET 248 @RPM 1400

POWER PLANT: INST'N 10871525

TRANSMISSION ASSY: 7520995
TYPE: SYNCHROMESH IN
FORWARD SPEEDS: (5) REVERSE (1)
GEAR RATIO: HIGH 1.00:1 7.36:1
FOURTH 1.45:1
LOW 7.55:1

TRANSFER TRANSMISSION: INST'N 8757844

TRANSFER TRANSMISSION: P/N 10871782
GEAR RATIO: HIGH 1.00:1
LOW 1.98:1

FRONT SUSPENSION: INST'N 8757839

FRONT AXLE		7521734
FRONT SPRINGS	(2)	7368628
SHOCK ABSORBERS	(2)	7539007

REAR SUSPENSION: INST'N 8757725

REAR AXLE	(2)	7368511
REAR SPRINGS	(2)	7521792
TORQUE ROD ASSY	(6)	8757685

FRAME ASSY: 7521806
SIDE RAIL: 8 x 3 x 5/16
SECTION MODULUS: 9.54 IN^3

TIE DOWNS: NO. W/W (12) 7373215
LOCATION: (6) EACH SIDE

WHEELS: (10) MS 53044-5
SIZE: 7.5 x 20, OFFSET 6 3/16

TIRES: (10) PLUS (1) SPARE MS 35388-16
SIZE: 9.00 x 20 (8) PLY NDCC

TUBES: MS 35392-13

CAB ASSY: SOFT TOP 8757744

ELECTRICAL SYSTEM: INST'N 10896754-1
POTENTIAL: 24 VOLT
BATTERIES: (2) (12) VOLT (6TN) MS 35000

STARTING MOTOR:		7762618
GENERATOR 25 AMP		7355736
COIL:		7762685
REGULATOR:		MS 51356-1
B.O. DRIVING LAMP		MS 51318
B.O. MARKER LAMP		MS 53047
STOPLIGHT, TAIL:	(2)	MS 51329-1
STOPLIGHT, B.O.:	(1)	MS 51302-1
REFLECTORS:	(4)	RED MS 35387-1
	(4)	AMBER MS 35387-2

BRAKE: SERVICE INST'N 8757651 HUB & DRUM ASSYS
FRONT LH 7529053 RH 7529054
REAR LH 8757681 RH 8757682
DRUM SIZE, FRT 15 X 3 REAR 15 X 3
BRAKE, PARKING, SIZE: 14 X 3
ACTUATION: AIR/HYDRAULIC

HAND BRAKE: INST'N 10871530

WINCH: INST'N 10871532
WINCH: MS 51352-1
20000 LB CAPACITY

PINTLE: INST'N 7722050
PINTLE: MS 51118-1

PERFORMANCE: LOADED
CRUISING RANGE, HIGHWAY 224 MILES
MAX. SPEED, HIGHWAY 58 MPH

FORDING KIT:
FORDING DEPTH W/O KIT 40 IN
FORDING DEPTH W/KIT 72 IN

MISCELLANEOUS EQUIPMENT:
CLOSURE, HARDTOP 7354276

(FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.)

(REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.)

THIS VEHICLE SHALL BE IN ACCORDANCE WITH DRAWINGS IN REFERENCED ENGINEERING PARTS LIST, COPIES OF WHICH MAY BE OBTAINED FROM:
U. S. ARMY TANK-AUTOMOTIVE CENTER
ATTN: STANDARDIZATION BRANCH
WARREN, MICHIGAN 48090.

Ⓑ CANCELLED AFTER NO SUPERSEDING STANDARD.

APPROVED/RESCINDED/REVISED Ⓐ 18 OCTOBER 1965 Ⓑ 5 June 1985

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.MO (ATAC) Other Cust NAVY – MC	TITLE CHASSIS, TRUCK, MILITARY DESIGN, M45, 2-1/2 TON, 6X6, 154 INCH WHEELBASE	MILITARY STANDARD MS 51392
PROCUREMENT SPECIFICATION MIL-T-45362	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Obsolescence) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23118:00Z
Check document to verify that this is the current version before use.