
FED. SUP CLASS
5305

REVIEWER: MI, MU, MO, NSA, IS, WC

USER: SHIPS

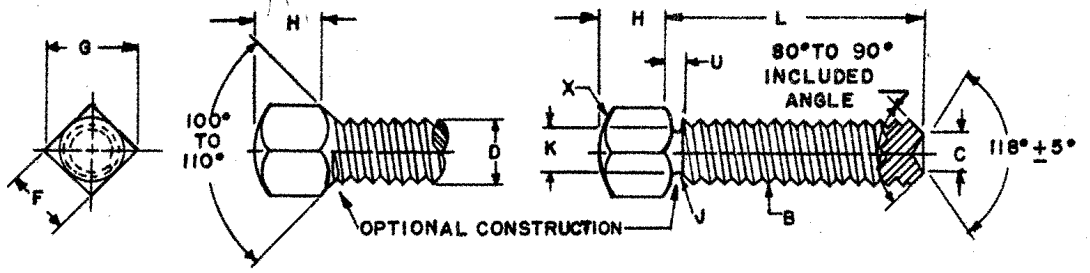

D	NOMINAL DIAMETER	1/4 .2500	5/16 .3125	3/8 .3750	7/16 .4375	1/2 .5000
B	THREADS PER INCH	20UNC	18UNC	16UNC	14UNC	13UNC
K	DIAMETER OF NECK RELIEF Max	.185	.240	.294	.345	.400
	Min	.170	.225	.279	.330	.385
F	WIDTH ACROSS FLATS Max	.250	.3125	.375	.4375	.500
	Min	.241	.302	.362	.423	.484
G	WIDTH ACROSS CORNERS Min	.331	.415	.497	.581	.665
H	HEIGHT OF HEAD Nom	.187	.234	.281	.328	.375
	Max	.196	.245	.293	.341	.389
	Min	.178	.224	.270	.315	.361
J	RADIUS OF NECK RELIEF Max	.032	.036	.041	.046	.050
U	WIDTH OF NECK RELIEF Max	.100	.111	.125	.143	.154
X	RADIUS OF HEAD	.625	.781	.937	1.094	1.250
C	DIAMETER OF POINT Max	.132	.172	.212	.252	.291
	Min	.118	.156	.194	.232	.270

L LENGTH	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number	Dash Number
3/8	+0 -1/32	1	16			
1/2		2	17	34	51	
5/8		3	18	35	52	68
3/4		4	19	36	53	69
7/8		5	20	37	54	70
1	+0 -1/16	6	21	38	55	71
1-1/4		7	22	39	56	72
1-1/2		8	23	40	57	73
1-3/4		9	24	41	58	74
2		10	25	42	59	75
2-1/4	+0 -3/32		26	43	60	76
2-1/2			27	44	61	77
3			28	45	62	78
3-1/2						79
4						80

MATERIAL: Steel, Carbon, in accordance with procurement specification.

PROTECTIVE COATING: Cadmium Plated in accordance with procurement specification.

THREADS: The threads shall be in accordance with Screw-Thread Standards, for Federal Services Handbook H-28.

DIMENSIONS: All dimensions are in inches unless otherwise specified.

PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS51955-1.

NOTES: (1) Referenced documents shall be of the issue in effect on date of invitations for bid.
(2) For design feature purposes, this standard takes precedence over procurement documents referenced herein.

P.A. WC
Other Cust SHIPS

PROCUREMENT SPECIFICATION
FF-S-210

TITLE
SETSCREW-SQUARE HEAD, CUP POINT,
CARBON STEEL, CADMIUM PLATED, UNC-2A

SUPERSEDES:
MS51954, BCSX1 and BCSX2

MILITARY STANDARD
MS51955

SHEET 1 OF 3

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

REVISED 18 NOV 1963

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.

D	NOMINAL DIAMETER		5/8 .6250	3/4 .7500	7/8 .8750	1 1.000	
B	THREADS PER INCH		11UNC	10UNC	9UNC	8UNC	
K	DIAMETER OF NECK RELIEF	Max Min	.507 .492	.620 .605	.731 .716	.838 .823	
F	WIDTH ACROSS FLATS	Max Min	.625 .606	.750 .729	.875 .852	1.000 .974	
G	WIDTH ACROSS CORNERS	Min	.833	1.001	1.170	1.337	
H	HEIGHT OF HEAD	Nom Max Min	.469 .485 .452	.562 .582 .544	.656 .678 .635	.750 .774 .726	
J	RADIUS OF NECK RELIEF	Max	.059	.065	.072	.081	
U	WIDTH OF NECK RELIEF	Max	.182	.200	.222	.250	
X	RADIUS OF HEAD		1.562	1.875	2.187	2.500	
C	DIAMETER OF POINT	Max Min	.371 .347	.450 .425	.530 .502	.609 .579	

L LENGTH	Tolerance	Dash Number	Dash Number	Dash Number	Dash Number	
3/4 7/8	+0 -1/32	86 87				
1 1-1/4 1-1/2 1-3/4 2	+0 -1/16	88 89 90 91 92	104 105 106 107 108	120 121 122 123	136 137 138	
2-1/4 2-1/2 3 3-1/2 4	+0 -3/32	93 94 95 96 97	109 110 111 112 113	124 125 126 127 128	139 140 141 142 143	
4-1/2 5		98	114	129 130	144 145	

NOTE: For material, protective coating and other pertinent data, see sheet 1.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 18 NOV 63 REVISED

P.A. WC Other Cust SHIPS	TITLE SETSCREW - SQUARE HEAD, CUP POINT, CARBON STEEL, CADMIUM PLATED, UNC-2A	MILITARY STANDARD MS 51955	
PROCUREMENT SPECIFICATION FF-S-210	SUPERSEDES: MS51054, BCSX1 and BCSX2	SHEET 2	OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5305

INTERCHANGEABILITY TABLE

The screws covered by dash numbers given in previous issues of this standard are cancelled/inactivated after the indicated approval date on this document. The cancelled screws cannot always replace the new screws and should be used until existing stocks are depleted Use only the new screws for design and replacement. Replacement shall be in accordance with this table.

PART NUMBERS		PART NUMBERS		PART NUMBERS	
CANCELLED	NEW	CANCELLED	NEW	CANCELLED	NEW
MS51054-1	MS51955-1	MS51054-51	MS51955-51	MS51054-96	MS51955-96
-2	-2	-52	-52	-97	-97
-3	-3	-53	-53	-98	-98
-4	-4	-54	-54	-104	-104
-5	-5	-55	-55	-105	-105
MS51054-6	MS51955-6	MS51054-56	MS51955-56	MS51054-106	MS51955-106
-7	-7	-57	-57	-107	-107
-8	-8	-58	-58	-108	-108
-9	-9	-59	-59	-109	-109
-10	-10	-60	-60	-110	-110
MS51054-16	MS51955-16	MS51054-61	MS51955-61	MS51054-111	MS51955-111
-17	-17	-62	-62	-112	-112
-18	-18	-68	-68	-113	-113
-19	-19	-69	-69	-114	-114
-20	-20	-70	-70	-120	-120
MS51054-21	MS51955-21	MS51054-71	MS51955-71	MS51054-121	MS51955-121
-22	-22	-72	-72	-122	-122
-23	-23	-73	-73	-123	-123
-24	-24	-74	-74	-124	-124
-25	-25	-75	-75	-125	-125
MS51054-26	MS51955-26	MS51054-76	MS51955-76	MS51054-126	MS51955-126
-27	-27	-77	-77	-127	-127
-28	-28	-78	-78	-128	-128
-34	-34	-79	-79	-129	-129
-35	-35	-80	-80	-130	-130
MS51054-36	MS51955-36	MS51054-86	MS51955-86	MS51054-136	MS51955-136
-37	-37	-87	-87	-137	-137
-38	-38	-88	-88	-138	-138
-39	-39	-89	-89	-139	-139
-40	-40	-90	-90	-140	-140
MS51054-41	MS51955-41	MS51054-91	MS51955-91	MS51054-141	MS51955-141
-42	-42	-92	-92	-142	-142
-43	-43	-93	-93	-143	-143
-44	-44	-94	-94	-144	-144
-45	-45	-95	-95	-145	-145

NOTE: For material, protective coating and other pertinent data, see sheet 1.

APPROVED 18 NOV 63 REVISED

P.A. WC Other Coast SHIPS	TITLE SETSCREW- SQUARE HEAD, CUP POINT, CARBON STEEL, CADMIUM PLATED, UNC-2A	MILITARY STANDARD MS51955	
PROCUREMENT SPECIFICATION FF-S-210	SUPERSEDES: MS51054, BCSX1 and BCSX2	SHEET 3	OF

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:14Z
Check the source to verify that this is the current version before use.