
FED. SUP CLASS
5220

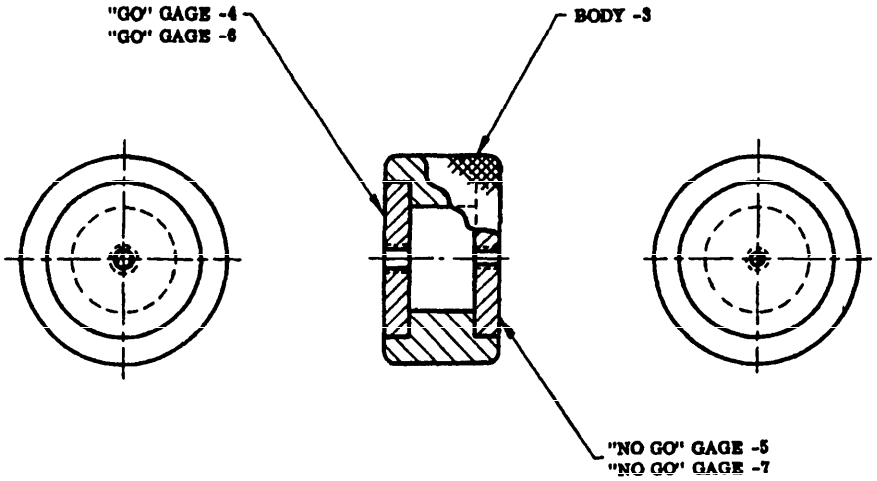

DASH NO.	"GO" GAGE	"NO GO" GAGE
-1	-4	-5
-3	-6	-7

NOTES:

1. MATERIAL: (A) BODY -3; STEEL, QQ-S-637, COMP B1113, CONDITION CDSR.
   (B) "GO" RING GAGE -4, -6 AND "NO GO" RING GAGE -5 AND -7; STEEL, HIGH SPEED, QQ-T-590.
2. SURFACE ROUGHNESS: (A) BODY; 125√ ALL OVER, PRIOR TO KNURLING.
   (B) "GO" RING GAGE -4, -6 AND "NO GO" RING GAGE -5 AND -7, 16√ ALL OVER. FINISH IN ACCORDANCE WITH ASA B46.1.
3. HEAT TREATMENT: "GO" RING GAGE -4, -6 AND "NO GO" RING GAGE -5 AND -7; OIL HARDEN TO ROCKWELL C60 -63.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. THE MARKING ON GAGE -4, -5, -6 AND -7 SHALL INCLUDE THE MS PART NO. AND LATEST REVISION LETTER, THE WORDS "GO" OR "NO GO" AS APPLICABLE, THE NO. OF TEETH, THE DIAMETRAL PITCH AND THE PRESSURE ANGLE.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED TOLERANCES; DECIMALS ±.005 ANGLES, ±1°. INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH MIL-STD-8.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY - AS	TITLE	MILITARY STANDARD
Other Cust ARMY - MU NAVY - AS AF - 11	GAGE, RING, SPLINE (GO-NO GO)	MS90406
PROCUREMENT SPECIFICATION	SUPERSEDES: BUORD SA-2412503 AND SA-2412504	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. W73 PLATE NO. 15320

REVIEWER SYMBOLS: ARMY - MU, EL, MI NAVY - AS, SH AF - 11, 85

USER SYMBOLS: ARMY - AV NAVY - AS, CG, MC AF - 17

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.


USER SYMBOLS:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER SYMBOLS:
ARMY - MU, EL, MI
NAVY - AS, SH
AF - 11, 85


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


FED. SUP CLASS
5220

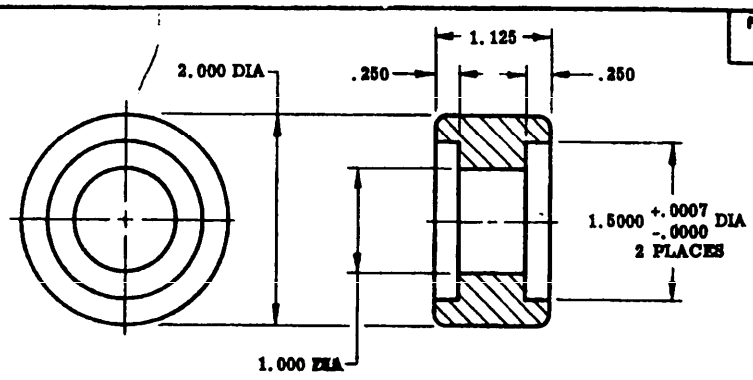

BODY -3

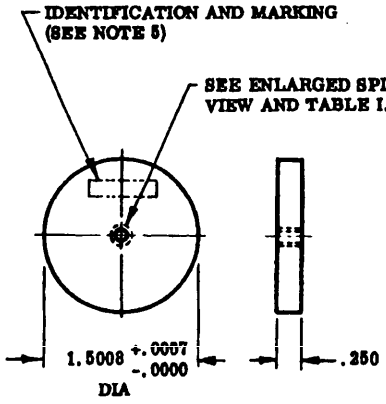

"GO" RING GAGE -4 AND -6
"NO GO" RING GAGE -5 AND -7

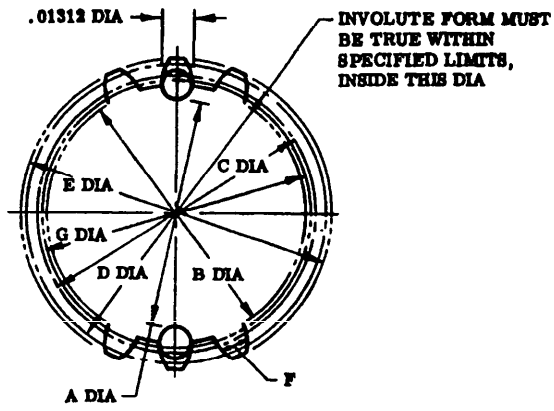

ENLARGED SPINE VIEW

TABLE I - SPLINE DATA

DATA	DASH NO.			
	-4	-5	-6	-7
GAGE TYPE	"GO"	"NO GO"	"GO"	"NO GO"
TOOTH FORM (a)	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE	FULL DEPTH TRUE INVOLUTE
PRESSURE ANGLE	20°	20°	20°	20°
NO. OF TEETH	21	21	13	13
DIAMETRAL PITCH	120	120	120	120
A DIA (REF)	.1589 +.0000 -.0001	.1581 +.0001 -.0000	.0918 +.0000 -.0001	.0909 +.0001 -.0000
B +.0002 -.0000 (INSIDE DIA)	.1644	.1644	.1018	.1018
C (PITCH DIA) (REF)	.175	.175	.1083	.1083
D (TRUE INVOLUTE FORM DIA)	.1872	.1872	.1247	.1247
E (MIN ROOT DIA)	.189	.189	.126	.126
F (CIRCULAR SPACE WIDTH) (REF)	.01309	.01286	.01309	.01285
G (BASE CIRCLE DIA)				

(a) ALLOWABLE ERRORS: SPACING ±.0002, INVOLUTE PROFILE ±.0002.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY - AS Other Cust ARMY - MU NAVY - AS AF - 11	TITLE GAGE, RING, SPLINE (GO-NO GO)	MILITARY STANDARD MS90406
PROCUREMENT SPECIFICATION	SUPERSEDES: BUORD SA-2412503 AND SA-2412504	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated)

W75

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 15320

*U.S. GOVERNMENT PRINTING OFFICE: 1967-301-509/15

Source: https://assist.dla.mil -- Downloaded: 20260-23T20:36Z
Check the source to verify that this is the current version before use.