FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.


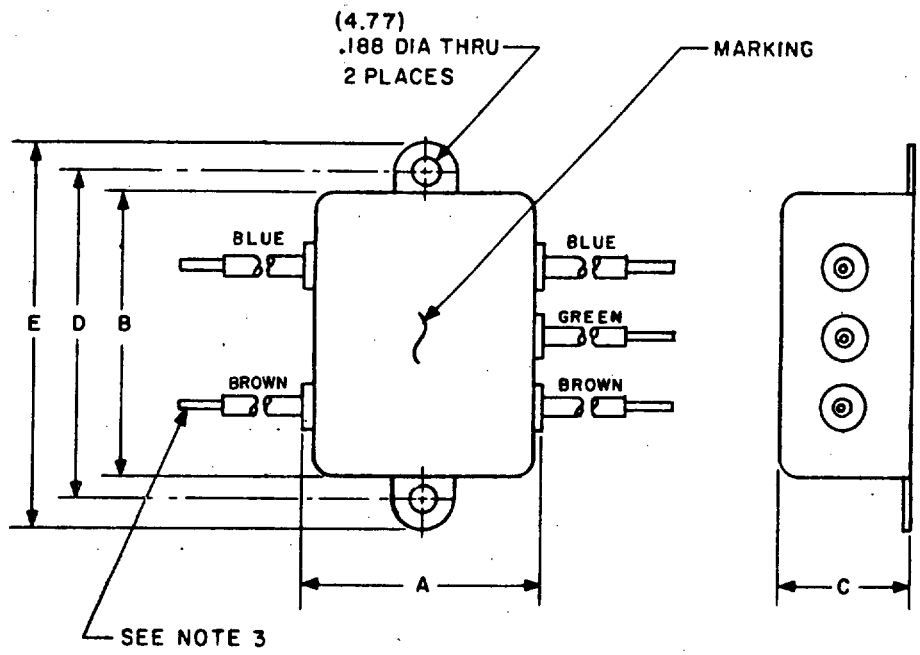


FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

Part number WF2190/3	Maximum dimensions										Electrical schematic
	A		B		C		D		E		
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	
-01	0.94	23.9	1.75	44.4	0.63	15.9	2.13	54.1	2.50	63.5	A
-02	1.81	46.0	2.00	50.8	0.88	22.3	2.38	60.4	2.78	70.6	B
-03	0.94	23.9	1.75	44.4	0.63	15.9	2.13	54.1	2.50	63.5	A
-04	1.81	46.0	2.00	50.8	0.88	22.3	2.38	60.4	2.78	70.6	B
-05	1.31	33.2	1.75	44.4	0.75	19.0	2.13	54.1	2.50	63.5	A
-06	1.81	46.0	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-07	1.31	33.2	1.75	44.4	0.75	19.0	2.13	54.1	2.50	63.5	A
-08	1.81	46.0	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B
-09	1.31	33.2	1.75	44.4	1.13	28.7	2.13	54.1	2.50	63.5	A
-10	2.06	52.3	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.6	B

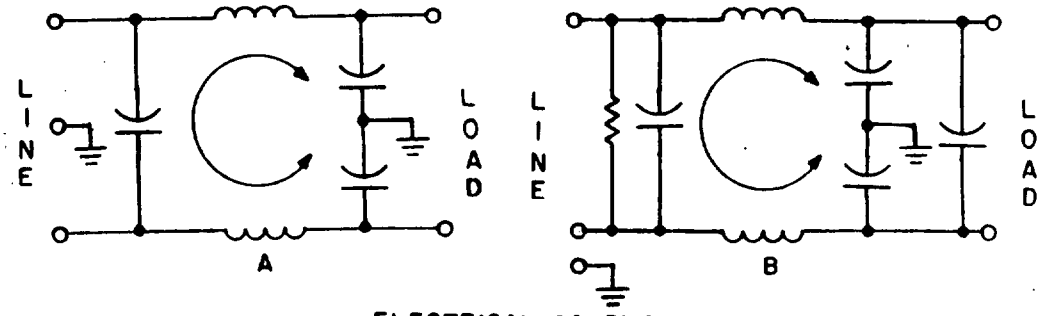

ELECTRICAL SCHEMATICS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Millimeters are in parenthesis.
4. All wire leads are 4.0 inches long, minimum (101.6 mm) AWG 20 wire minimum and shall be the color indicated.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/3	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1.0	15	20	30	50	50
-02	1.0	15	20	30	"	"
-03	2.0	10	15	25	"	"
-04	2.0	10	15	25	"	"
-05	3.0	15	20	30	"	"
-06	3.0	15	20	30	"	"
-07	5.0	10	15	25	"	"
-08	5.0	"	"	"	"	"
-09	10.0	"	"	"	"	"
-10	10.0	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/3	FSCM							
	73631	05245	23880	56289	93790	13619	02777	13050
	Vendor part number							
-01	F1100BB01	1B3	GA3A-1	1JX5101C	APF111W	RF5400-U01	F85004	600C2
-02	F1200BB01	1K3	GA3B-1	1JX5201C	APF121W	RF5500-U01	F85038	605C2
-03	F1100BB03	2B3	GA3A-2	2JX5102C	APF211W	RF5400-U02	F85010	600C2
-04	F1200BB03	2K3	GA3B-2	2JX5202C	APF221W	RF5500-U02	F85044	605C2
-05	F1100BB03	3B3	GA3A-3	3JX5103C	APF311W	RF5400-U03	F85016	600C5
-06	F1200BB03	3K3	GA3B-3	3JX5203C	APF321W	RF5500-U03	F85050	605C5
-07	F1100BB06	5B3	GA3A-5	5JX5104C	APF511W	RF5400-U05	F85022	600C5
-08	F1200BB06	5K3	GA3B-5	5JX5204C	APF521W	RF5500-U05	F85056	605C5
-09	F1100BB10	10B3	GA3A-10	10JX5105C	APF1011W	RF5400-U10	F85028	600C10
-10	F1200BB10	10K3	GA3B-10	10JX5205C	APF1021W	RF5500-U10	F85062	605C10

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/3	FSCM			
	19130	96733	96733	12294
	Vendor part number			
-01	RNF-1L3	F2B013	F2A013	9679-101-9031
-02	RNF-1P3	F2K013	F2B013	9679-101-9041
-03	RNF-2L3	F2B023	F2A023	9679-101-9032
-04	RNF-2P3	F2K023	F2B023	9679-101-9042
-05	RNF-3L3	F2B033	F2A033	9679-101-9033
-06	RNF-3P3	F2K033	F2B033	9679-101-9043
-07	RNF-5L3	F2B053	F2A053	9679-101-9034
-08	RNF-5P3	F2K053	F2B053	9679-101-9044
-09	RNF-10L3	F2B103	F2A103	9679-101-9035
-10	RNF-10P3	F2K103	F2B103	9679-101-9045

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-3

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-595/3687

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.