FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.


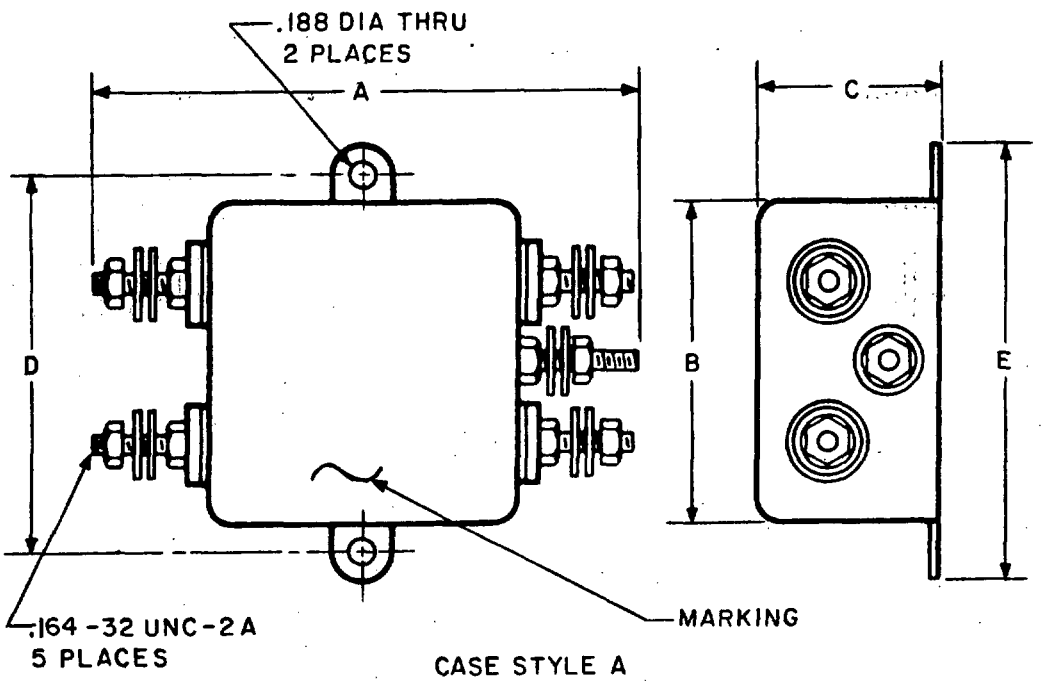



FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

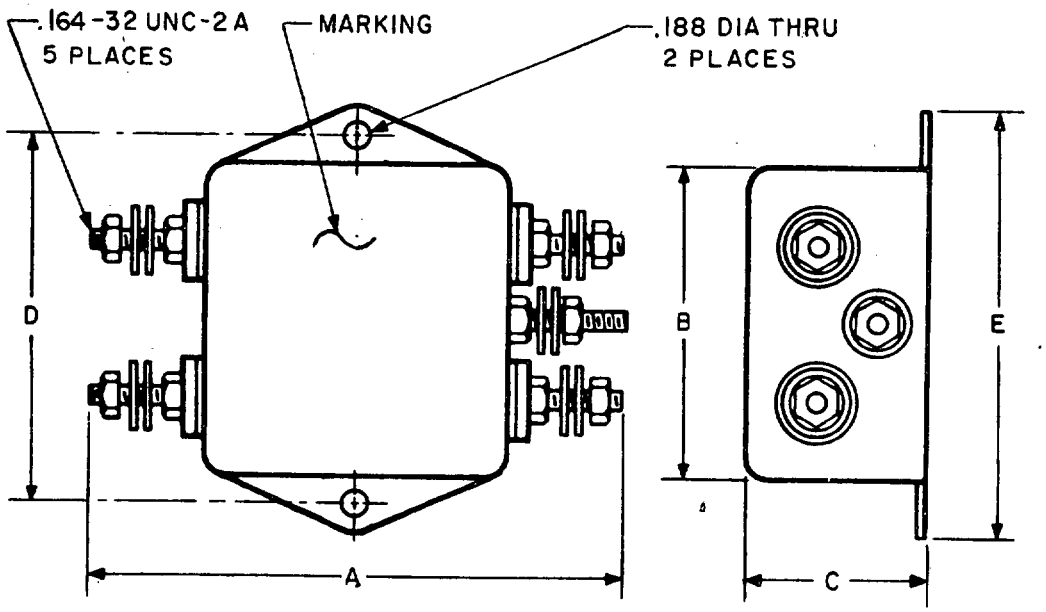

CASE STYLE B

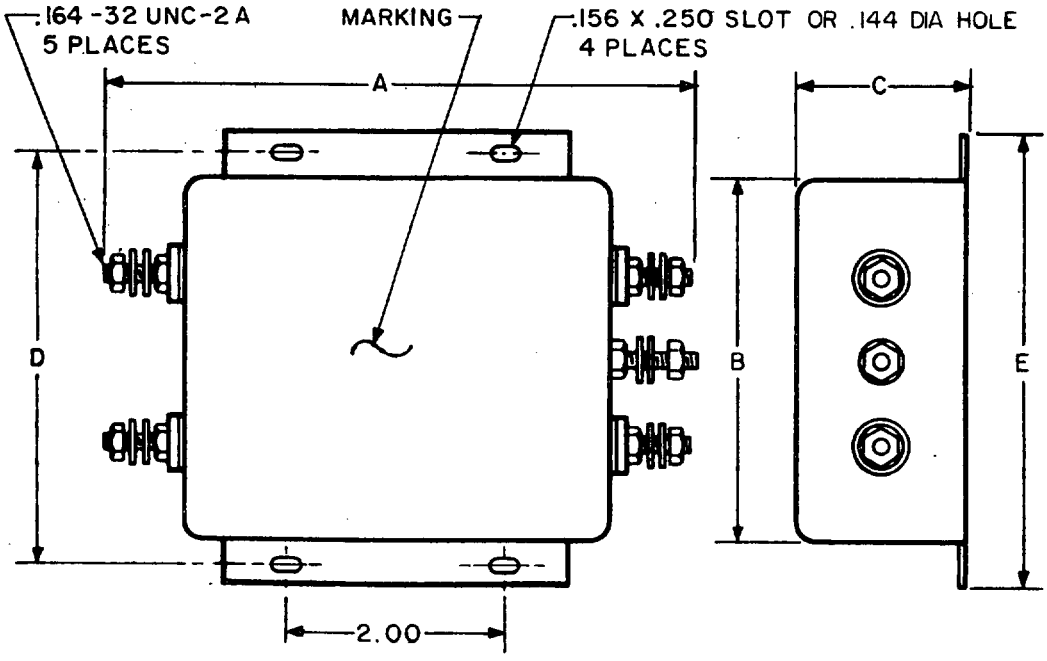


CASE STYLE C

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

INCHES	MM
.156	3.96
.188	4.77
.250	6.35
2.000	50.80

Part number WF2190/6	Maximum dimensions										Electrical schematic	Case style
	A		B		C		D		E			
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM		
-01	2.60	66.0	1.75	44.4	1.13	28.7	2.13	54.1	2.50	63.5	A	A
-02	3.35	85.1	2.00	50.8	1.13	28.7	2.38	60.4	2.78	70.61	B	A
-03	3.35	85.1	2.00	50.8	1.13	28.7	2.39	60.4	2.78	70.61	A	A
-04	3.35	85.1	2.50	63.8	1.50	38.1	2.94	74.7	3.32	84.3	B	B
-05	5.22	132.6	3.31	84.1	1.50	38.1	3.75	95.2	4.13	104.9	A	C
-06	5.23	132.8	3.31	84.1	1.50	38.1	3.75	95.2	4.13	104.9	B	C

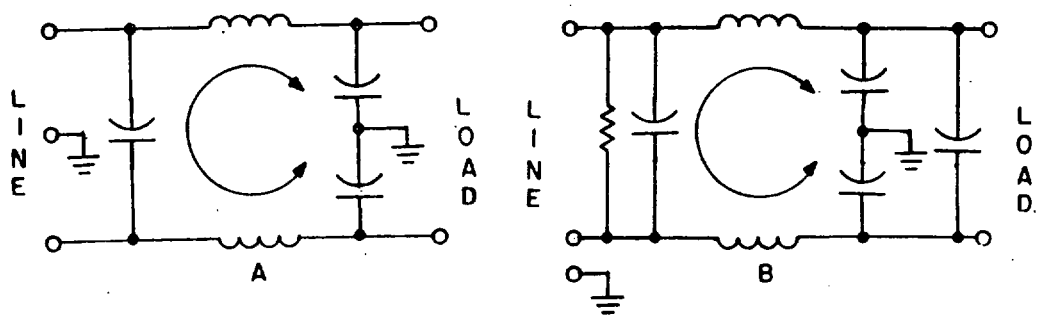

ELECTRICAL SCHEMATICS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number WF2190/6	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	10	10	15	25	50	50
-02	10	"	"	"	"	"
-03	20	"	"	"	"	"
-04	20	"	"	"	"	"
-05	30	"	"	"	"	"
-06	30	"	"	"	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/6	FSCM				
	73631	05245	23880	56289	93790
	Vendor part number				
-01	F1100DD10	10B6	---	10JX5105F	APF1011S
-02	F1200DD10	10K6	GA6B-10	10JX5205D	APF1021S
-03	F1100DD20	20B6	GA4A-20	20JX5106B	APF2011S
-04	F1200DD20	20K6	GA5B-20	20JX5206A	APF2021S
-05	---	30B6	GA5A-30	30JX5107A	APF3011S
-06	---	30K6	GA5B-30	30JX5207A	APF3021S

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/6	FSCM				
	12294	13619	02777	13050	19130
	Vendor part number				
-01	9679-101-9091	RF5400-V10	F85031	600F10	---
-02	9679-101-9101	RF5500-V10	F85065	605F10	RNF-10P6
-03	9679-101-9092	RF5400-V20	F85033	600F20	RNF-20L6
-04	9679-101-9102	RF5500-V20	F85066	605F20	RNF-20P9
-05	9679-101-9093	RF5400-V30	F85034	600F30	---
-06	9679-101-9103	RF5500-V30	F85067	605F30	RNF-3-P10

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-6

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-595/3689

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.