FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.


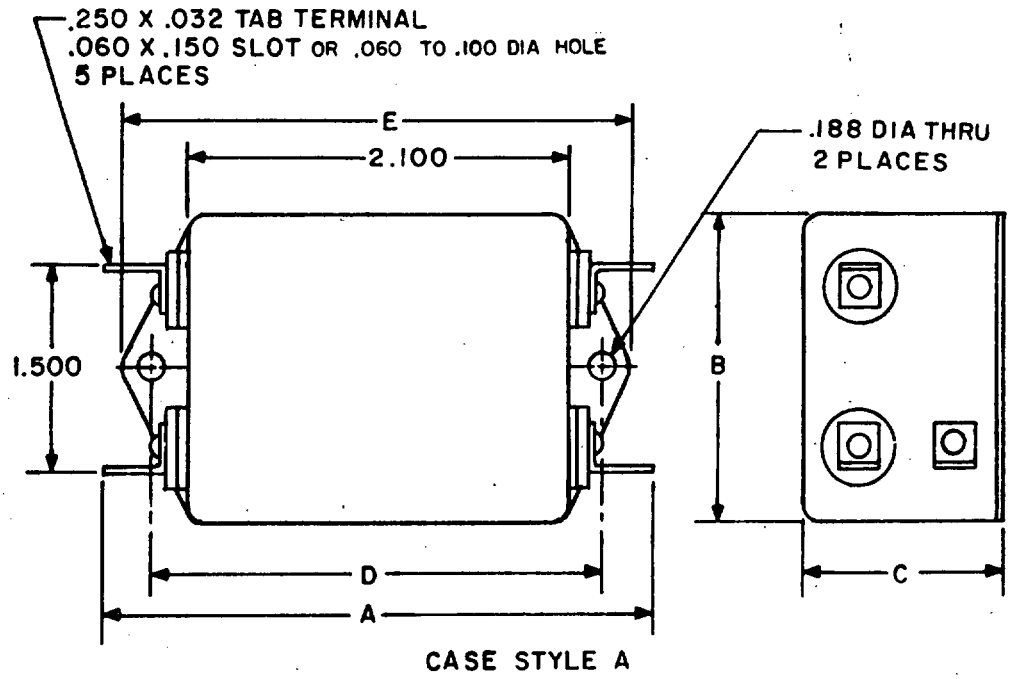



FIGURE 1. Case dimensions and electrical schematics.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

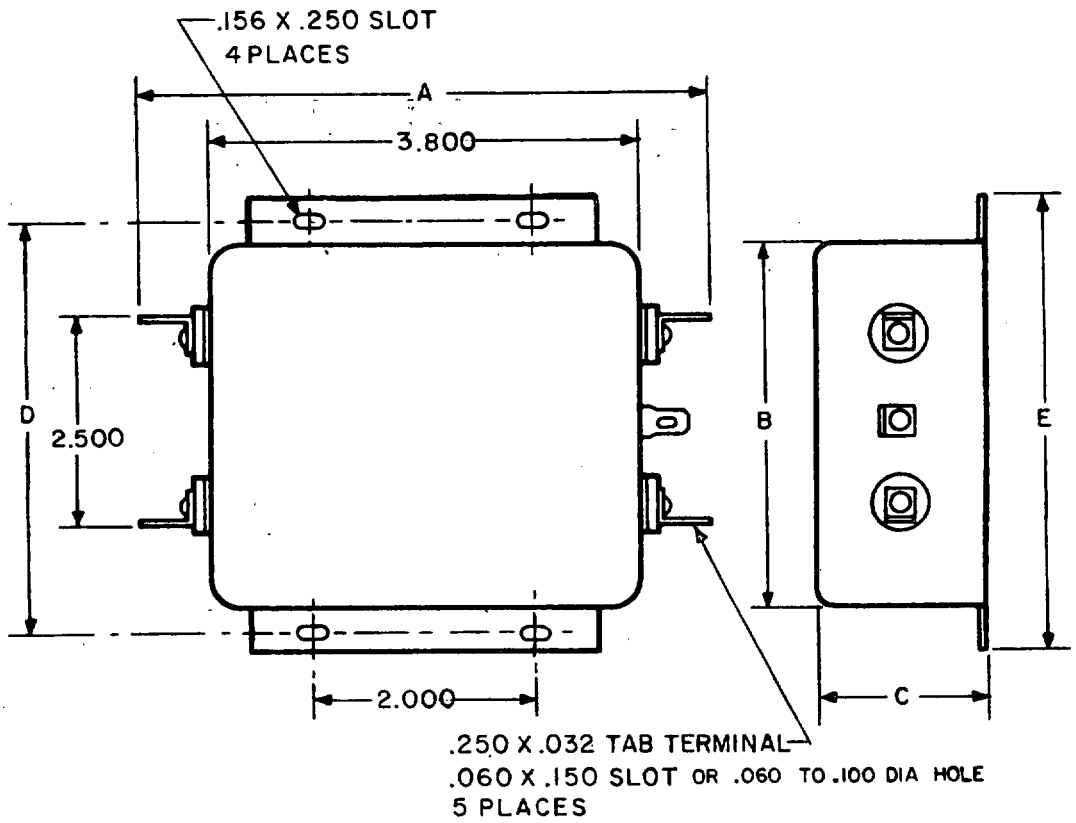


CASE STYLE B


FIGURE 1. Case dimensions and electrical schematics - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

| INCHES | MM | INCHES | MM |
|---|---|---|---|
| .032 | .81 | 1.500 | 38.10 |
| .060 | 1.52 | 2.000 | 50.80 |
| .150 | 3.81 | 2.100 | 53.34 |
| .156 | 3.96 | 2.500 | 63.50 |
| .188 | 4.77 | 3.800 | 96.52 |
| .250 | 6.35 | | |

| Part number WF2190/7 | Maximum dimensions | | | | | | | | | | Case style |
|---|---|---|---|---|---|---|---|---|---|---|---|
| | A | | B | | C | | D | | E | | |
| | IN | MM | IN | MM | IN | MM | IN | MM | IN | MM | |
| -01 | 3.33 | 84.58 | 1.75 | 44.4 | 1.13 | 28.7 | 2.38 | 60.4 | 2.78 | 70.61 | A |
| -02 | 3.33 | 84.58 | 1.75 | 44.4 | " | " | 2.38 | 60.4 | 2.78 | 70.61 | " |
| -03 | 3.83 | 84.58 | 2.00 | 50.8 | " | " | 2.94 | 74.7 | 3.32 | 84.3 | " |
| -04 | 3.83 | 84.58 | 2.00 | 50.8 | " | " | 2.94 | 74.7 | 3.32 | 84.3 | " |
| -05 | 3.83 | 84.58 | 2.00 | 50.8 | 1.50 | 38.1 | 2.94 | 74.7 | 3.32 | 84.3 | " |
| -06 | 5.00 | 127.00 | 3.32 | 84.3 | 1.50 | 38.1 | 3.75 | 95.2 | 4.12 | 104.8 | B |

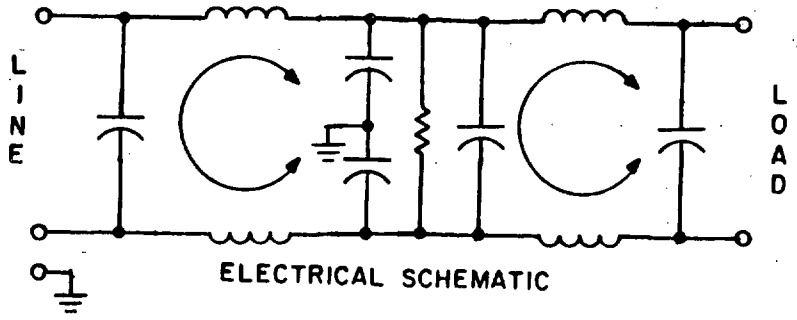

ELECTRICAL SCHEMATIC

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

FIGURE 1. Case dimensions and electrical schematics - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

| Part number WF2190/7 | Current rating (amperes per line) | Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220 | | | | |
|---|---|---|---|---|---|---|
| | | .15 MHz | .20 MHz | .50 MHz | 10 MHz | 20 MHz |
| -01 | 1 | 40 | 45 | 65 | 65 | 65 |
| -02 | 2 | 15 | 25 | 55 | " | " |
| -03 | 3 | 40 | 45 | 65 | " | " |
| -04 | 5 | 15 | 25 | 55 | " | " |
| -05 | 10 | " | " | " | " | " |
| -06 | 20 | " | " | " | " | " |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

| Part number WF2190/7 | FSCM | | | | | |
|---|---|---|---|---|---|---|
| | 73631 | 05245 | 23880 | 56289 | 93790 | 02777 |
| | Vendor part number | | | | | |
| -01 | F1300AA01 | 1R1 | HP1-1 | 1JX5301A | APF131L | F85069 |
| -02 | F1300AA03 | 2R1 | HP1-2 | 2JX5302A | APF231L | F85073 |
| -03 | F1300AA03 | 3R1 | HP1-3 | 3JX5303A | APF331L | F85077 |
| -04 | F1300AA06 | 5R1 | HP1-5 | 5JX5304A | APF531L | F85081 |
| -05 | F1300AA10 | 10R1 | HP1-10 | 10JX5305A | APF1031L | F85085 |
| -06 | --- | 20R1 | HP1-20 | --- | APF2031L | --- |

TABLE II. Substitution data 1/ 2/ - Continued.

| Part number WF2190/7 | FSCM | | | | |
|---|---|---|---|---|---|
| | 13050 | 19130 | 96733 | 96733 | 12294 |
| | Vendor part number | | | | |
| -01 | 620A1 | RNF-1T14 | F2R011 | F2K011 | 9679-101-9111 |
| -02 | 620A2 | RNF-2T14 | F2R021 | F2K021 | 9679-101-9121 |
| -03 | 620A3 | RNF-3T14 | F2R031 | F2K031 | 9679-101-9112 |
| -04 | 620A5 | RNF-5T14 | F2R051 | F2K051 | 9679-101-9122 |
| -05 | 620A10 | RNF-10T14 | --- | --- | 9679-101-9113 |
| -06 | 620A20 | --- | F2R201 | F2K201 | 9679-101-9123 |

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, ME
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-7

U.S. GOVERNMENT PRINTING OFFICE : 1984 - 421-595-/3690

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.