FEDERAL SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE

This specification was approved by the Assistant Administrator, Office of Federal Supply and Services, General Services Administration, for the use of all Federal agencies.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of W-F-2190/GEN.

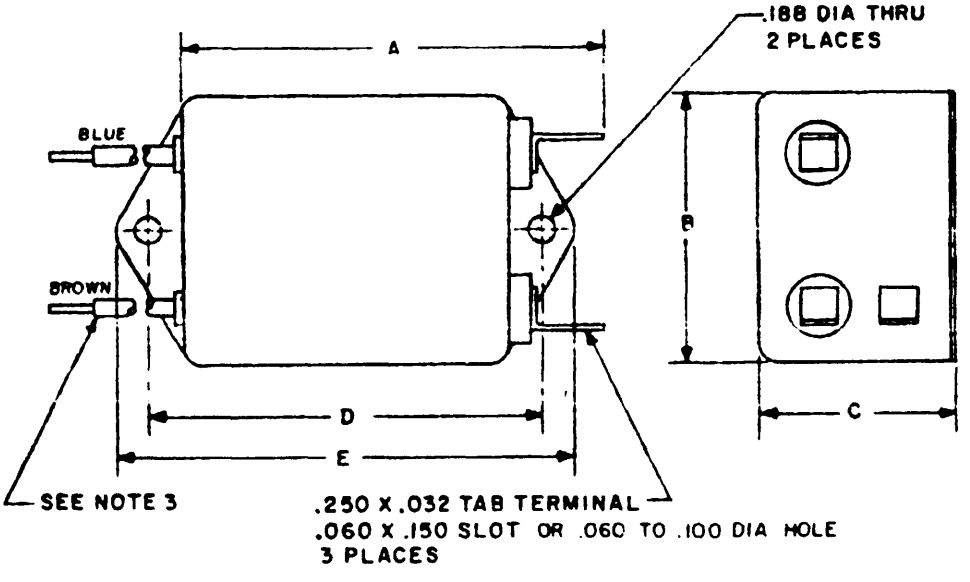



FIGURE 1. Case dimensions and electrical schematics.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:37Z
Check the source to verify that this is the current version before use.

MIL-F-2190/8

INCHES	MM
.032	.81
.060	1.52
.150	3.81
.188	4.77
.250	6.35

Part number MF2190/8	Maximum dimensions									
	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
-01	2.68	68.07	1.75	44.4	1.13	28.7	2.38	60.4	2.78	70.61
-02	2.68	68.07	1.75	44.4	1.13	28.7	2.38	60.4	2.78	70.61
-03	3.18	80.77	2.00	50.8	1.13	28.7	2.94	74.7	3.32	84.3
-04	3.18	80.77	2.00	50.8	1.13	28.7	2.94	74.7	3.32	84.3
-05	3.18	80.77	2.00	50.8	1.50	38.1	2.94	74.7	3.32	84.3

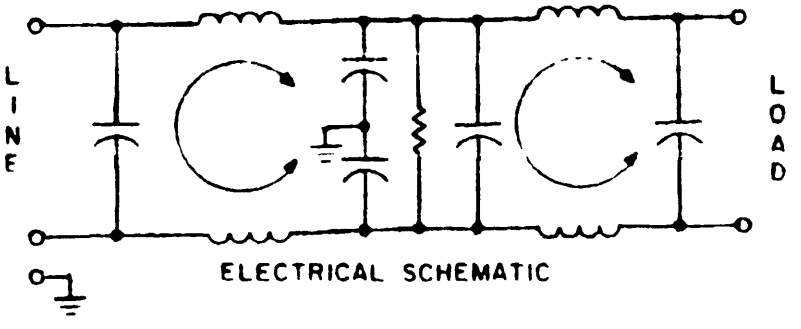

ELECTRICAL SCHEMATIC

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Wire leads shall be 4.0 inches minimum length #20 AWG wire minimum and shall be the color indicated.

FIGURE 1. Case dimensions and electrical schematics - Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimension and electrical schematics: See figure 1.

Operating temperature range: 0°C to +65°C.

Maximum leakage current: As measured from either of the two input or output lines to the filter case, the maximum permissible leakage current shall not exceed 0.65 mA at 125 volts, 60 Hz or 1.25 mA at 250 volts, 50 Hz.

Voltage rating:

Rated at 125 volts, ac, over the frequency range of 0 to 400 Hz.

Rated at 250 volts, ac, over the frequency range of 0 to 60 Hz.

Rated current: See table I.

Insertion loss: In accordance with MIL-STD-220 and table I.

Part number: Shall be in accordance with table I and figure 1.

Substitution data: Filters covered by this specification replace commercial part numbers as specified in table II.

TABLE I. Current ratings and insertion loss.

Part number MF2190/8	Current rating (amperes per line)	Minimum no-load insertion loss (dB) at +25°C in accordance with MIL-STD-220				
		.15 MHz	.20 MHz	.50 MHz	10 MHz	20 MHz
-01	1	40	45	65	65	65
-02	2	15	25	55	"	"
-03	3	40	45	65	"	"
-04	5	15	25	55	"	"
-05	10	15	25	55	"	"

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:37Z
Check the source to verify that this is the current version before use.

TABLE II. Substitution data. 1/ 2/

Part number WF2190/8	FSCM					
	73631	05245	23880	56289	93790	02777
	Vendor part number					
-01	F1300AB01	1R2	HP2-1	1JX5301B	APF131LW	F85070
-02	F1300AB03	2R2	HP2-2	2JX5302B	APF231LW	F85074
-03	F1300AB03	3R2	HP2-3	3JX5303B	APF331LW	F85078
-04	F1300AB06	5R2	HP2-5	5JX5304B	APF531LW	F85082
-05	F1300AB10	10R2	HP2-10	10JX5305B	APF1031LW	F85086

TABLE II. Substitution data 1/ 2/ - Continued.

Part number WF2190/8	FSCM				
	13050	19130	96733	96733	12294
	Vendor part number				
-01	620B1	RNF-1T14	F2R012	F2K012	9679-101-9131
-02	620B2	RNF-2T12	F2R022	F2K022	9679-101-9141
-03	620B3	RNF-3T12	F2R032	F2K032	9679-101-9132
-04	620B5	RNF-5T12	F2R052	F2K052	9679-101-9142
-05	620B10	RNF-10T12	F2R102	F2K102	9679-101-9133

1/ Set of vendor part numbers is not necessarily complete. Additional vendor part numbers will be added as they become available.

2/ CAUTION. Do not use the vendor part number for item procurement. The similar vendor part number may not satisfy the performance requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:37Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians

Army - ER
Navy - EC
Air Force - 85

Review Activities

Army - AR, MI
Navy - SH
Air Force - 11, 17, 99

User Activities

Army - AT, AV, MF
Navy - AS, MC, OS, YD
Air Force - 19

CIVIL AGENCY COORDINATING ACTIVITIES:

GSA - FSS
NCS -
NASA - MSF, LRC, JFK

PREPARING ACTIVITY:

DLA - ES

DOD project 5915-0271-8

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:37Z
Check the source to verify that this is the currentversion before use.