MIL-N-7284D
11 Feb 85
SUPERSEDING
MIL-N-7284C
23 November 1970

MILITARY SPECIFICATION

NOZZLE, OIL SERVICING, PISTOL GRIP, NONDRIP, TYPE A-2B

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This specification covers one type of nondrip, pistol grip, aircraft piston engine lubricating oil servicing nozzle designated type A-2B.

* 2. APPLICABLE DOCUMENTS

* 2.1 Government documents.

* 2.1.1 Specifications and Standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

L-P-378	Plastic Sheet and Strip, Thin Gauge, Polyolefin
PPP-B-601	Boxes, Wood, Cleated-Plywood
PPP-B-636	Boxes, Shipping Fiberboard

MILITARY

MIL-G-1086	Gasket Material, Synthetic Rubber (For Bolted Steel Tanks)
MIL-A-8625	Anodic Coatings, For Aluminum And Aluminum Alloys
MIL-L-22851	Lubricating Oil, Aircraft Piston Engine, (Ashless Dispersant)

STANDARDS

FEDERAL

FED-STD-H28	Screw Thread Standard For Federal Services

Beneficial comments (recommendation, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: The Engineering Division, San Antonio, ALC/MMEDO Kelly AFB Texas 78241 by using the self addressed Standardization Document Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 4930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

MILITARY

DOD-STD-100	Engineering Drawing Practices
MIL-STD-129	Marking For Shipment And Storage
MIL-STD-130	Identification Marking Of US Military Property
MIL-STD-276	Impregnation of Porous Nonferrous Metal Castings
MIL-STD-810	Environmental Test Methods And Engineering Guidelines
MIL-STD-831	Test Reports, Preparation Of
MS 25384	Electrostatic Discharge Jumper Fuel Nozzle-to-Aircraft

2.1.2 Other Government documents, drawings and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified.

DRAWING

AIR FORCE

51A7565	Valve Assembly-Inlet, Oil Servicing Nozzle, 1 1/2 In Pipe Thread

(Copies of specifications and standards required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.3 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DOD adopted shall be the issue listed in the current DODISS and the supplement thereto, if applicable.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951	Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

2.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 First article. When specified, sample shall be subjected to first article inspection (see 4.4 and 6.3).

3.2 Component parts. The nozzle shall consist of the following major components:

Body (see 3.6.1)
Handle (see 3.6.2)
Primary valve (see 3.6.3)
Secondary valve (see 3.6.4)
Operating lever (see 3.6.7)
Spout (see 3.6.8)
Strainer (see 3.6.9)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

Dust cap (see 3.6.10)
Inlet valve (see 3.6.11)
Ground cable (see 3.6.12)

The complete nozzle shall include all major components and all minor components such as seals, springs, pins, stems, nuts and bolts necessary for its intended use.

3.3 Materials.

3.3.1 Materials shall be as specified herein and shall be of the best quality and suitable in all respects for use with type II aircraft piston engine lubricating oil conforming to MIL-L-22851. All metal shall be either of the corrosion-resistant type or shall be treated to resist corrosion due to salt spray and atmospheric conditions likely to be encountered in storage and service.

3.3.2 Protective treatment. When materials are used in the construction of the nozzle that are subject to deterioration when exposed to climatic and environmental conditions likely to occur during service usage, they shall be protected against such deterioration in a manner that will in no way prevent compliance with the performance requirements of this specification. The use of any protective coating that will crack, chip, or scale with age or extremes of climatic and environmental conditions shall be avoided.

3.3.3 Elastomers. All elastomers used in the nozzle shall be fully compatible with type II lubricating oil conforming to MIL-L-22851 and shall not swell, shrink, or lose strength, flexibility, or resiliency to a degree that will impair nozzle operation when used with such oil.

3.4 Design and construction. The nozzle shall be designed and constructed to be eminently suitable for its intended use. The nozzle shall be designed and constructed so that no part will work loose in service. The nozzle shall be designed and constructed to withstand the strains, jars, vibration and other adverse conditions, incident to shipping, storage, installation and service. The nozzle shall be designed and constructed so that adjustments and repairs can be made to it by operating personnel using only common hand tools.

3.5 Configuration. The nozzle shall have the general configuration shown on figure 1.

3.6 Details of components.

3.6.1 Body. The nozzle body shall be cast from high-strength aluminum alloy and heat treated before machining under conditions giving a minimum yield strength of 20,000 pounds per square inch (psi). After machining, it shall be anodized in accordance with MIL-A-8625 and given a chromic-acid process. After anodizing, the body shall be impregnated in accordance with MIL-STD-276, either method A or B. The body inlet shall be threaded internally 1-5/8 18 NEF to receive the Inlet Valve Assembly specified in 3.6.11. Wear lugs shall be provided on the body at suitable locations to prevent damage to vital parts in case the nozzle is dragged. The centerlines of the spout and inlet connections shall be at an angle of 90 degrees.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

3.6.2 Handle. The handle shall be made from the same material and receive the same treatment, excepting impregnation, as the nozzle body specified in 3.6.1. It shall be of the replaceable type and secured to the nozzle body at four points. The handle shall be provided with a lifting eye located on the inside portion near the operating level. The handle shall be so formed that it will provide a guard for the operating level and will guide the free end of the operating lever. The guard shall prevent opening of the nozzle and injury to the operating parts if the nozzle is dropped.

3.6.3 Primary valve. The primary valve shall shut off oil flow when the operating level is released.

3.6.4 Secondary valve. The nozzle assembly shall incorporate a nondrip secondary valve located at the end of the nozzle spout. The secondary valve shall be actuated solely by the operating lever that actuates the primary valve of the nozzle. The valve mechanism shall be designed so that the secondary valve opens fully before the primary valve opens, and so that the secondary valve does not close until the primary valve is fully closed. Release of the operating lever shall cause the secondary valve to close completely and automatically and to shut off all oil drippage immediately. The secondary valve shall incorporate an elastomeric seal and shall be designed so that no parts can fall out or be removed from the end of the spout.

3.6.5 Valve springs. All valve springs shall be made from either phosphor bronze or stainless steel.

3.6.6 Valve stems. All valve stems shall be made from either rod brass, bronze, stainless steel, or copper-nickel alloy, and shall possess sufficient strength to preclude the possibility of its being distorted by normal operation.

3.6.7 Operating lever. The valve shall be actuated by a hand-operated lever of ample size and strength to resist bending and breaking during normal service. The lever shall be securely attached to the nozzle and shall be so shaped and pivoted that the contact of the nozzle stem with the lever is practically on the axis of the stem, thereby causing a minimum of side thrust to the stuffing box.

3.6.8 Spout. The nozzle spout shall be made of a high-strength nonferrous alloy and shall conform to Figure 1. The spout shall incorporate a seat for the secondary valve, the seat shall be either an integral part of the spout or shall be permanently attached by brazing or welding.

3.6.9 Strainer. The nozzle shall be provided with a 60 mesh strainer made of corrosion-resistant steel or nickel-copper-alloy metal cloth and shall be joined by means of an electrically welded seam not more than 3/32 inch in width. The shape of the strainer shall be conical. The strainer shall be installed in the inlet end of the nozzle and properly secured in order that no oil will bypass. The strainer shall be readily removable and shall be designed so that it actuates and fully opens the inlet valve when the inlet valve assembly is screwed into the nozzle body.

3.6.9.1 Guard. The strainer shall be provided with a wire mesh guard to prevent the metal cloth from bulging or being damaged from excess pressure when the strainer becomes clogged. The screen, guard, and reinforcing ring shall be constructed of the same material to prevent electrolytic action.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:22Z
Check the source to verify that this is the current version before use.

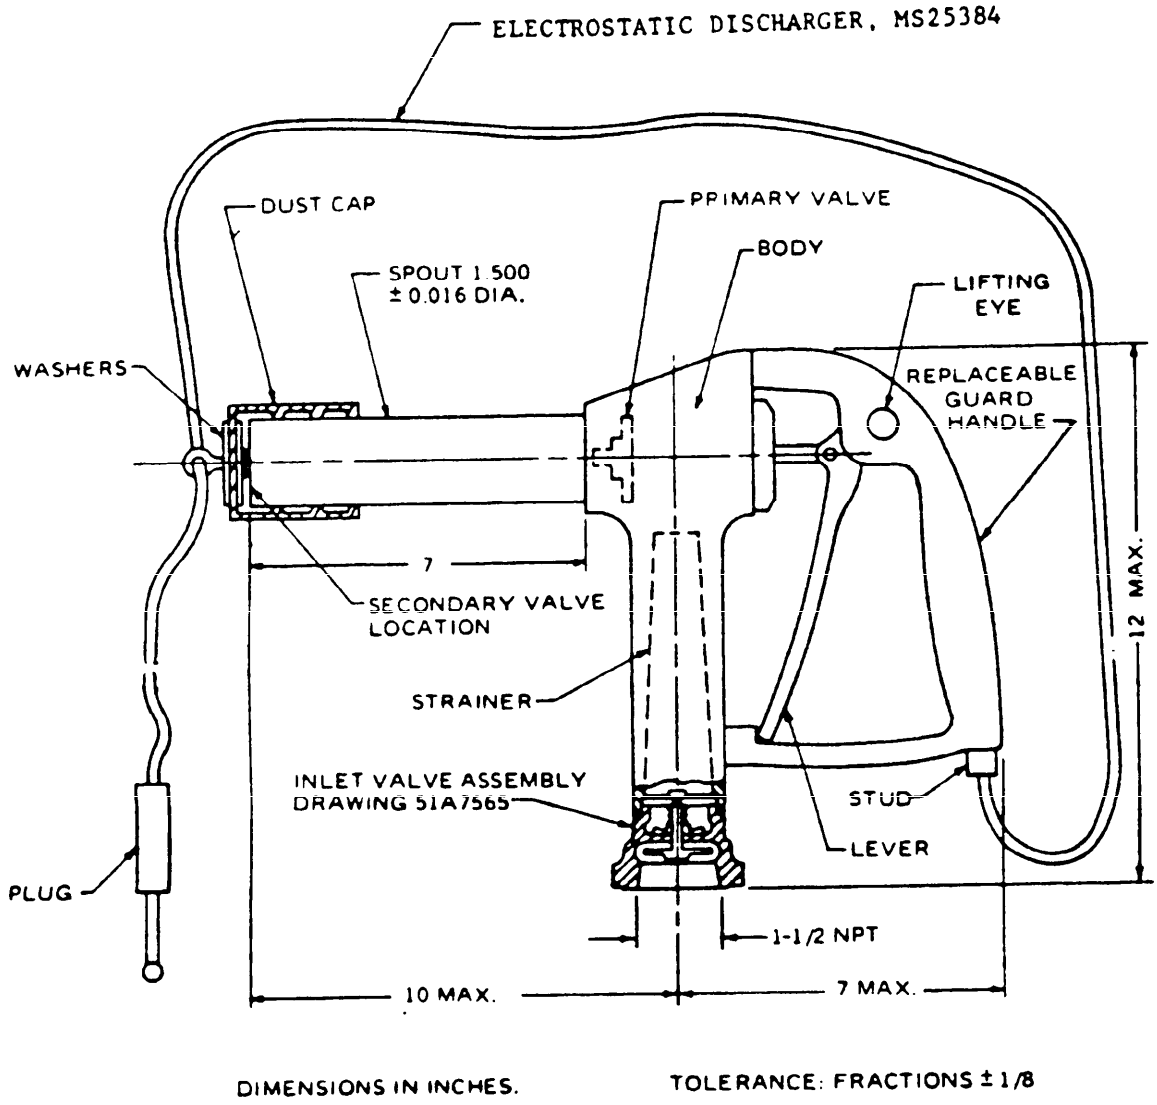


FIGURE 1. OIL NOZZLE

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

3.6.10 Nozzle cap. The nozzle shall be provided with a close fitting, removable, molded rubber cap fabricated from material conforming to MIL-G-1086. The cap shall serve to close the end of the spout and prevent entrance of dust and other foreign material. The cap shall be 3 inches in length and shall be provided with noncontinuous internal circular corrugations to provide the necessary retaining power on the end of the spout. The cap shall be fixed securely on the ground cable as shown in Figure 1; the attachment and cap shall be of sufficient strength that the cap can be removed by pulling on the cable.

3.6.11 Inlet valve. An inlet valve assembly in accordance with Drawing 51A7565 shall be provided on the inlet connection of the nozzle. The valve shall be used to retain the oil in the delivery hose when the nozzle is replaced or repaired.

3.6.12 Electrostatic Discharger. The nozzle shall be provided with an electrostatic discharger in accordance with MS25384 except that the cable length between the discharger stud and plug shall be 54 ±1 inches. The discharger cable shall be attached to the dust cap as shown in Figure 1 to prevent loss of the dust cap. The tapped hole in the nozzle handle for the discharge stud shall not be drilled completely through the handle.

3.7 Performance.

3.7.1 Hydrostatic pressure. The nozzle body, the primary valve, stem seal or any nozzle component shall neither leak nor permanently deform when the nozzle upstream of the primary valve is subjected to hydrostatic pressure from zero to 125 pounds per square inch gage (psig).

3.7.2 Flow pressure. The nozzle body, stem seal, spout to body junction or any nozzle component shall neither leak nor permanently deform when the nozzle is dispensing oil at full flow with a nozzle inlet pressure of 40 psig.

3.7.3 Capacity. The nozzle shall deliver not less than 20 gallons per minute (gpm) of oil conforming to MIL-L-22851 Type II at a temperature no higher than 80° F with a nozzle inlet pressure of 40 psig.

3.7.4 Lever pull. When tested in accordance with 3.6.4, an operating lever force of not more than 20 pounds shall be required to fully open the nozzle.

3.7.5 Primary valve. The primary valve shall not leak when subjected to an internal air pressure of 35 psig.

3.7.6 Secondary valve. The secondary valve shall not leak when subjected to an internal oil pressure of from 0 to 125 psig.

3.7.7 Environmental. The nozzle shall withstand storage temperatures ranging from -65° to + 140° F without adverse effects that degrade operations and function.

3.7.8 Endurance. The nozzle shall not be adversely effected by 5,000 full operating cycles.

Source: https://assist.dla.mil -- Downloaded: 202610-17T08:22Z
Check the source to verify that this is the current version before use.

3.7.9 Impact. The nozzle, while attached to a filled and pressurized 1-1/2 inch fueling hose, shall neither discharge nor be either operationally or functionally adversely effected, excepting the spout and secondary valve, if subjected to multiple 12-foot drops onto airfield pavement. The spout and secondary valve shall not be damaged when subjected to multiple 3-foot drops onto airfield pavement that impact on the spout tip.

3.8. Dimensions. Nozzle dimensions and tolerances shall be as shown on Figure 1. Dimensions and tolerances not specified shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the nozzle, they shall be held or limited accordingly.

3.9 Weight. The weight of the complete nozzle (see 3.2) shall not exceed 9 pounds.

3.10 Threads. All hose pipe and machine screw threads shall conform to FED-STD-H28.

3.11 Part numbering. All parts having the same manufacturer's part number shall be functionally and dimensionally interchangeable. Drawing number requirements of DOD-STD-100 shall govern changes in the manufacturer's part numbers.

3.12 Identification of product. Equipment, assemblies, and parts shall be marked for identification in accordance with MIL-STD-130.

3.13 Workmanship.

3.13.1 General. The nozzle, including all parts and accessories, shall be constructed and finished in a thoroughly workmanlike manner. Particular attention shall be given to neatness and thoroughness of marking of parts and assemblies, and freedom of parts from burrs and sharp edges.

3.13.2 Dimensions. Dimensions and tolerances not specified shall be as close as is consistent with the best shop practices. Where dimensions and tolerances may affect the interchangeability, operation, or performance of the nozzle, they shall be held or limited accordingly.

3.14 Cleaning. The nozzle shall be thoroughly cleaned of loose metal chips, and other foreign material after final assembly. Burrs and sharp edges shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of tests. The inspection and testing of the nozzle shall be classified as follows:

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:22Z
Check the source to verify that this is the currentversion before use.

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

* 4.3 General. The test fluid shall be type II lubricating oil conforming to MIL-L-22851 with the exception of the primary valve leakage test (see 4.6.5). Except for the paragraph 4.6.7, environmental tests, all tests shall be conducted at an ambient temperature between 70° and 90°F. Except for the paragraph 4.6 Capacity test, the test oil shall be maintained between 70° and 90°F. During all flow testing, the nozzle shall be observed. There shall be no leaking and no permanent deformation of any component.

4.4 First article inspection.

4.4.1 Test samples. First article samples shall consist of four complete nozzles fabricated in the same facilities, using the same materials, components, and production technologies that will be used for the production lot of nozzles. Two of the first article sample nozzles will be submitted, accompanying the test report, in an unused and untested condition and two shall be subjected to the tests required herein and then submitted, accompanying the test report, to the procuring activity. Additional nozzles may be furnished, at the contractor's option, for the environmental tests if a shorter preproduction test time is desired.

4.4.2 Test report. Upon completion of first article inspection, a test report shall be prepared in accordance with MIL-STD-831. The test report shall record all observed values. An authorized Government quality control representative shall countersign all data sheets and the report. The following shall be included as part of the test report:

* a. The temperature and viscosity (both saybolt universal seconds and centistokes) of the test oil for each particular test as well as any temperature variations during flow testing.

b. Schematics of all test set-ups.

c. Calibration data.

d. Certification by component manufacturers that a elastomers which come in contact with the dispensed oil are compatible with Type II lubricating oil conforming to MIL-L-22851 (see 3.3.3).

e. 8 inch by 10 inch photographs of the nozzle as well as any photographs as required by 4.6.9.

f. Assembly drawings of the nozzle.

g. Cutaway drawings of the nozzle illustrating action of the primary and secondary valves.

h. Completed check list required by 4.6.1.

4.4.3 First article inspection. The first article inspection shall consist of all tests described under 4.6.

4.5 Quality conformance inspection. The quality conformance inspection shall consist of individual tests and sampling tests.

Source: https://assist.dla.mil -- Downloaded: 202640-17T08:22Z
Check the source to verify that this is the current version before use.

4.5.1 Individual tests. Each nozzle shall be subjected to the following tests as described under 4.6.

a. Examination of product (see 4.6.1)

b. Primary valve leakage (see 4.6.5)

4.5.2 Sampling test. Two nozzles shall be selected at random from every 500 nozzles, or fraction thereof, and both shall be subjected to paragraph 4.6.8. Endurance test.

a. Valve (see 4.6.3).

4.6 Test methods.

4.6.1 Examination of product. The nozzle shall be examined to insure compliance with this specification with regard to workmanship, dimensions, weight, material, marking and proper operation. This examination for the first article nozzles shall be accomplished using a checklist which lists the requirements and the results of the examination after each requirement and the verification method.

4.6.2 Hydrostatic pressure. Test oil shall be admitted through the inlet valve assembly at a pressure not exceeding 2 psig, and the operating lever shall be actuated two times in such a manner that the nozzle is filled completely. The operating lever shall then be held in a position such that the nondrip secondary valve is open but the primary valve is closed. The pressure shall be adjusted to 2 psig and maintained for 10 minutes. The pressure shall then be increased successively to 40 and 125 psig and maintained 10 minutes at each pressure. There shall be no leakage through the valve or out of any seal or nozzle component, and there shall be no permanent deformation of any nozzle component.

4.6.3 Capacity. The nozzle shall be connected to a suitable pumping system, and test oil shall be pumped through the nozzle at a rate of 20 gpm with the nozzle valves in full open position. The oil temperature at the nozzle inlet shall be held below 80°F; cooling shall be employed if necessary. The oil temperature at the nozzle inlet shall be held below 80°F; cooling shall be employed if necessary. The nozzle inlet pressure shall not exceed 40 psig when measured under these conditions.

4.6.4 Lever pull. The nozzle shall be installed in a test oil pumping system, adjusted to give a static pressure of 35 psig when the nozzle is shut off and to give a full-open flow rate of at least 15 gpm through the nozzle. The lever pull shall be measured by applying force at a point four inches from the fulcrum of the lever. The force shall be determined through full travel of the operating lever and shall not exceed 20 pounds in any position.

4.6.5 Primary valve leakage. With the operating lever held in a position such that the nondrip secondary valve is open but the primary valve is closed, an internal air pressure of 35 psig shall be applied at the inlet, and the nozzle shall be submerged in water. If any air leakage occurs, as evidenced by bubbles, the nozzle shall be rejected.

4.6.6 Secondary valve leakage. The primary valve shall be held open by any suitable means, and the operating lever shall be released so that the nondrip secondary valve is held closed by normal spring pressure only. Test oil

Source: https://assist.dla.mil -- Downloaded: 20260-17T08:22Z
Check the source to verify that this is the current version before use.

under a pressure not greater than 2 psig shall be admitted to the nozzle inlet in such a manner that the spout is filled with oil, actuating the secondary valve as required. With the secondary valve closed by normal spring pressure, a pressure of 2 psig shall be maintained for 10 minutes. The pressure shall then be increased to 125 psig and held for 10 minutes. There shall be no leakage through the secondary valve.

4.6.7 Environmental tests. The following environmental tests shall be conducted on the nozzle in accordance with the specified method of MIL-STD-810. Upon completion of each of the following tests, the nozzle shall be returned to room environment and shall be subject to and pass the primary valve leakage test of 4.6.5.

4.6.7.1 High temperature. The nozzle shall be subjected to high temperature in accordance with Method 501, Procedure I.

4.6.7.2 Low temperature. The nozzle shall be subjected to low temperature in accordance with Method 502, Procedure I.

4.6.8 Endurance. The nozzle shall be installed in a pumping system, and test oil shall be passed through the nozzle at a flow rate of at least 10 gpm, measured with the nozzle valves wide open. The flow system shall be so adjusted that the static pressure when the nozzle is closed is not less than 35 psig. The wide-open flow rate shall be maintained at 10 gpm or greater throughout the test. The operating lever shall be moved through full travel to open and close the valves 5000 times. The oil temperature, nozzle inlet pressures with valves in closed and wide-open positions, and flow rate with valves in wide-open position shall be recorded and reported at the start and end of the test. The valves shall function normally through the test. At the conclusion of the 5000 operating cycles, the nozzle shall be subjected to the hydrostatic test specified in 4.6.2; there shall be no leakage of test oil through the valve or out of any seal or nozzle component, and there shall be no permanent deformation of any nozzle component. The nozzle shall then be subjected to the nondrip secondary valve test specified in 4.6.6; there shall be no permanent deformation of any nozzle component. The nozzle shall then be subjected to the nondrip secondary valve test specified in 4.6.6, there shall be no leakage through the secondary valve. The nozzle shall then be disassembled and examined for wear, misalignment, set of elastomers and seals, and general condition. Any evidence of abnormal wear or malfunction shall be cause for rejection.

4.6.9 Impact test. The nozzle, with the dust cap removed, shall be dropped six times from a height of 3 feet onto a concrete floor in such a manner that the end of the spout strikes the floor first. The test specified in 4.6.6 shall then be performed, there shall be no leakage through the secondary valve. The nozzle shall then be attached to a 50-foot length of 1-1/2 inch fuel hose. The other end of the hose shall be attached to a locking-type swivel connection. The hose and nozzle shall be filled completely with test oil (including the nozzle spout between the primary and secondary valves) at a pressure of 1 to 2 psig while held at floor level. The nozzle shall be raised to a height of 12 feet and dropped directly onto a concrete floor. If a catch pan is used, it shall be designed so that it rests absolutely flat on the concrete floor and so that the edge does not interfere with the drop of the hose and nozzle or in any way modify the nature of the impact. The drop shall be performed six times, rotating the fixed end of the hose between drops so as to cause the nozzle to strike in a different position each time. The hose and nozzle shall be repressurized each time if the

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

[illegible] the requirements of section 3.

repositioning or the previous impact have caused loss of pressure. The total amount of leakage from the nozzle during this test shall not exceed one quart. At the conclusion of this test, the nozzle shall be examined to determine the extent of deformation, breakage, or other damage, and all visible damage shall be recorded verbally and in photographs. Damage to the spout or secondary valve in the 12-foot drops shall not be cause for rejection. There shall be no breaks or excessive deformation of any other component that will interfere with normal functioning of the nozzle. The hydrostatic pressure test specified in 4.6.2 shall be performed; there shall be no leakage through the primary valve or out of any seal or nozzle component, and there shall be no permanent deformation of any nozzle component.

4.6.10 Inspection of preservation, packaging, packing and marking. Preservation, packaging, packing and marking of the nozzle shall be inspected to determine compliance with the requirements of 5.1, 5.2 and 5.3.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A or commercial as specified (see 6.2).

5.1.1 Level A. Each oil nozzle shall be wrapped with plastic wrap conforming to Type I, Class I or L-P-378, cushioned and placed in a unit container conforming to PPP-B-636, Grade and Type optional. The unit container shall be of minimum cube and tare. Closure shall be in accordance with the appendix to PPP-B-636.

5.1.2 Industrial/commercial. Oil nozzles shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

5.2.1 Level A. A quantity of oil nozzles preserved as specified in 5.1, shall be packed in a wood-cleated plywood shipping container conforming to PPP-B-601, overseas type, Grade A, style optional. Insofar as practicable, containers shall contain identical quantities and be of minimum cube and tare consistent with the protection required. Closure and strapping shall be in accordance with the appendix to PPP-B-601.

5.2.2 Level B. A quantity of oil nozzles preserved as specified in 5.1, shall be packed in a wood-cleated plywood shipping container conforming to PPP-B-601, domestic type, Grade B, Style Optional or a fiber board shipping container conforming to PPP-B-636, class weather resistant, style optional. Insofar as practical containers shall contain identical quantities and be of minimum cube and tare consistent with the protection required. Closure and strapping shall be in accordance with the appendix to the box specification.

5.2.3 Industrial/commercial. Oil nozzles preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Marking. All unit containers and exterior shipping containers shall be marked in accordance with MIL-STD-129 and ASTM D 3951 as applicable.

6. NOTES

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

6.1 Intended use. The A-2B nozzle is intended for servicing aircraft reciprocating engines with type II and type III lubricating oil conforming to MIL-L-22851.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).

6.3 First article. When a first article inspection is required, the item will be tested and should be a standard production item from the contractor's current invenory as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, test approval of the documents first article.

6.4 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Air Force - 99
Navy - AS

Review activity:
DLA-CS

Preparing activity:
Air Force - 82

(Project 4930-0316)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

☆ U.S. Government Printing Office: 1987—360-979/5804

(Fold along this line)

(Fold along this line)



NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U.S. AIR FORCE

SA-ALC/MMEDO
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-N-7284	Nozzle, Oil Servicing, Pistol Grip, Nondrip, Type A-2B

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

(FOLD DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T08:22Z
Check the source to verify that this is the current version before use.