MILITARY SPECIFICATION SHEET

ELECTRON TUBE, MAGNETRON

TYPE 8896

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the electron tube described herein shall consist of this document and the latest issue of Specification MIL-E-1.

DESCRIPTION: Pulsed, coaxial type, tunable , 8500 to 9630 MHz, 200 kW nominal peak power output, air cooled.

ABSOLUTE RATINGS:

Parameter:	If	tk	VSWR	Tuner Drive Torque	T(anode)	T(input bushing)
Unit:	A	sec	----	in.-lb.	°C	°C
Maximum:	50	---	1.5	8.0	125	270
Minimum:	—	180	----	---	---	---
				(See note 1)	(See note 2)	(See note 2)

Parameter:	Ef	ib	Pi	pi	tpc	rrv	Du	Pressurization Input	Pressurization Output
Unit:	V	A	W	kw	μsec	kv/μsec	—	psia	psia
Maximum:	10.0	32	720	1000	2.7	225	.0011	45	45
Minimum:	----	18	---	600	0.2	---	.0003	—	—
	(See note 3					(See note 4)		(See note 5)	(See note 6)

PHYSICAL CHARACTERISTICS:

Weight	19 pounds, maximum
Dimensions:	See figure 1
Mounting position:	Any
Cathode:	Unipotential

TEST CONDITIONS: See notes 7 and 8

Parameter:	Ef	tk	tpc	Du	rrv	VSWR
Unit:	V	sec	μs	—	kv/μs	----
Tolerance:	---	---	±10%	—	Min.	Max.
Test Condition 1:	8.0	180	0.27	0.0004	160	1.1:1
Test Condition 2:	6.0	180	1.0	0.0008	160	1.1:1
Test Condition 3:	5.0	180	2.5	0.001	160	1.1:1
Test Condition 4:	5.0 (See note 3)	180 (See note 3)	0.5	0.001	225	1.1:1

GENERAL:

Preproduction (First Article) testing required - See note 26

8896

FSC 5960

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	TEST	CONDITIONS	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1						
4003	Pressurizing	-	45 psia (min) input and output; See notes 5 and 6	---	---	---	---
1301	Heater current	-	Ef = 9.0 V tk = 180 sec (max)	If	13.5	14.9	A
4223	Operating torque or force	-	TA = 25° ±5°C See note 17	Torque	---	10	in/oz
4308	RF bandwidth (1)	1	F = F_1, F_3, and F_5 ib = 20 and 28A See note 10	BW	---	2/tpc	MHz
4308	RF bandwidth (2)	2	F = F_1, F_3, and F_5 ib = 23 and 30A See note 10	BW	---	2/tpc	MHz
4308	RF bandwidth (3)	3	F_3 ib = 23 and 30A See note 10	BW	---	1.5	MHz
4308	Minor lobes (1)	1	F = F_1, F_3, and F_5 ib = 30 and 28A See note 10	SL	9	---	db
4308	Minor lobes (2)	2	F = F_1, F_3, and F_5 ib = 23 and 30A See note 10	SL	10	---	db
4306	Pulse voltage	2	ib = 25A; F = F_1	epy	25.0	29.5	kv
4250	Power output (1)	2	F_1 to F_5 ib = 30.0A See note 22	Po	190	280	W
4218	Tunable frequency	2 2	Low frequency High frequency See notes 8 and 9	F F	--- 9630	8500 ---	MHz MHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	TEST	CONDITIONS	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 1 -cont'd						
4315	Stability (1)	3	Ef = 5.5 V ±.5 V F_4 = F; ib = 30A See note 11	MP	---	0.2	%
4315	Starting stability	2	F = F_1; ib = 30A See notes 11 and 12	MP	---	0.5	%
4318	Frequency modulation	2	F = F_1, F_3, and F_5 ib = 23 and 30A See note 13	FM	---	0.1	%
4318	Time jitter	4	F = F_1, F_3, and F_5	T_j	---	6.0	nsec rms
4315	Stability (4)	4	F = F_1, F_3, and F_5 in = 30A See notes 11 and 23	MP	---	0.4	%
	Quality conformance inspection, part 2						
4315	Stability (3)	1	Ef = 7.6 and 8.4 V F = F_1, F_3, and F_5 ib = 30A See note 11	MP	---	0.2	%
4223	Resettability	2	F = F_1, F_3, and F_4	---	---	5	MHz
4223	Tuning rate	2	ib = 26A See note 27	---	Per Fig 2	Per Fig 2	---
4310	Frequency pulling figure	2	F = F_1, F_3, and F_4 ib = 26A	Δ F	---	5	MHz
4311	Frequency pushing figure	2	F = F_1, F_3, and F_4 ib = 23 ±1A ib = 29 ±1A See note 30	$\Delta F/\Delta A$	---	0.1	MHz/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	TEST	CONDITIONS	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 2 -cont'd						
4250	Power output (2)	3,4	F_1 to F_5; ib = 30A See note 22	Po	200	350	W
	Quality conformance inspection, part 3						
4551	Life test		Group S Sequential life test portion only See note 29	Time	2500	—	hrs
4551	Intermittent life	2	Group D See notes 31 and 32	Life	1667	—	Cycles
	Life test end points						
4250	Power output	2	ib = 22.5 A	Po	120	—	W
4308	RF bandwidth	2	F = F_1, F_3, and F_5	BW	—	2.2/ tpc	MHz
4315	Stability	2	F = F_1, F_2, and F_5 ib = 30A	MP	—	0.3	%
—	Frequency modulation	2	F = F_1, F3, and F_5 ib = 26A	FM	—	0.2	MHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

METHOD	REQUIREMENT OR TEST	TEST	CONDITIONS	SYMBOL	LIMITS MIN	LIMITS MAX	UNIT
	Quality conformance inspection, part 3 -cont-d						
	Periodic check tests		See note 28				
4027	Temperature coefficient	2	T(anode) = 0° to 115°C; F = F_4 See notes 2 and 15	$\Delta F/\Delta T$	—	0.25	MHz
1031	Variable frequency vibration (operating)	2	F = F_1, F_3, and F_5 ib = 23 and 30A See notes 13 and 24	FM	—	2.0	MHz
1042	Shock		G = 15; t = 11 ms See notes 14 and 25				
4315	Stability (2)	2	Ef = 6 ±0.3 V F = F1, F3, and F5 ib = 30A See note 11	MP	—	0.2	%
1143	Air Cooling	2	TA = 25°C Pi-Po = 500 W See notes 2 and 16	T	—	TA+80	°C
—	High-low temperature tuning torque	-	No voltages temperature -55°C to 125°C See note 17	Torque	—	15.0	in-oz
4223	Mechanical tuning fatigue	-	See note 18	—	25,000	—	cycles
4030	Thermal frequency shift	2	F = F5; t = 15 ±5sec See note 19	ΔF	—	15	MHz
		-	t = 20 min	ΔF	—	18	MHz
1027	Temperature cycling (nonoperating)	-	See note 20	—	—	—	—
1031	Variable-frequency vibration (nonoperating)	-	No voltages See notes 10 and 21	—	—	—	—

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

NOTES:

1. The tuner drive shall be capable of supplying a minimum of 15 inch-ounces of torque to the magnetron tuning shaft and shall never supply more than 8.0 inch-pounds of torque (including inertial effects) under stable conditions.

2. The temperature is to be measured at the point indicated on Figure 1.

3. Prior to the application of high voltage, the cathode shall be heated to the required initial operating temperature. This shall be done by applying 9.0 volts ±5 percent for 180 seconds minimum. On the application of anode voltage, the heater voltage shall be reduced according to the following:

tpc (μsec)	Du	Ib (mAdc)	Ef (V) ±5%
Standby	-----	----------	9.0
0.25 to 0.30	.0004	Test condition 1	8.0
0.45 to 0.55	.001	Test condition 4	5.0
0.9 to 1.1	.0008	Test condition 2	6.0
0.9 to 1.1	.0003	7.5	8.0
2.25 to 2.75	.001	Test condition 3	5.0

4. The rate of rise of voltage (rrv) shall be expressed in kilovolts per microsecond (kv/μsec) defined by the steepest tangent to the leading edge of the voltage pulse above the 80 percent amplitude point. Any capacitance used in the viewing (measuring) circuit shall not exceed 6 pf.

5. The seal formed by clamping the magnetron mounting plate against the magnetron test fixture detail of Figure 3 or equivalent shall be hermetically tight for one minute minimum with the specified air pressure applied so as to surround the entire input bushing below the mounting plate.

6. The seal formed by clamping the magnetron output flange against the magnetron test fixture detail of Figure 4 or equivalent shall be hermetically tight for one minute minimum with the specified air pressure applied internally to the waveguide.

7. The maximum air pressure to assure prevention of electrical breakdown in the output coupling shall be 15 psig for voltage standing wave ratios up to 1.5 with phase shift variable over 360 electrical degrees. The magnetron shall be coupled directly to RG-51/U waveguide with a UG-52/U choke flange modified so that mounting holes provide clearance for number 8 bolts.

8. Nominal tuner dial readings shall be determined for frequency code letters A, B, and C. Frequencies corresponding to code letters shall be as specified herein. Tuner dial readings shall be determined for codes A and C under test condition 2 and for code B under test condition 3:

Source: https://assist.dla.mil -- Downloaded: 20260-15T15:22Z
Check the source to verify that this is the current version before use.

NOTES: -continued

Frequency	Code Letter Designation
F0 = 8500 MHz	
F1 = 8600 MHz	A (±10 MHz tolerance)
F2 = 8750 MHz	
F3 = 9000 MHz	
F4 = 9375 MHz	B (±10 MHz tolerance)
F5 = 9600 MHz	C (±10 MHz tolerance)
F6 = 9630 MHz	

9. The specified frequency range, F1 to F5, shall be covered by 130 ±8 turns of the tuner shaft. The frequency increases as the shaft is driven in a ccw direction as viewed from the waveguide side of the magnetron.

10. The radio frequency bandwidth and sidelobes shall be within the limits specified when a VSWR of 1.5 minimum is introduced in the load at a distance of 1 ±0.05 meters from the magnetron flange and phase is adjusted at the start of each measurement to produce maximum degradation.

11. Stability shall be measured in terms of the average number of output pulses missing, expressed as a percentage of the number of input pulses applied during the period of observation. The missing pulses (MP) due to any causes are considered to be missing if the rf energy is less than 70 percent of the normal energy level. The stability shall be measured when a VSWR of 1.5 minimum is introduced in the load at a distance of 1 ±0.05 meters from the magnetron flange and the phase is adjusted at the start of each measurement interval to produce maximum instability. The missing pulse count shall be performed over a 3 minute test interval.

12. After the nonoperational holding period of 168 hours minimum, the anode voltage shall be applied 180 seconds (max) after the application of the standby heater voltage (Ef). The missing pulse count test interval of 3 minutes shall start immediately after the application of anode voltage.

13. For frequency modulation measurements, the maximum peak-to-peak frequency deviation shall not exceed the specification. The test shall be performed using alternating current (60 to 400 Hz) in the heater at the specified voltage. The test shall be run excluding thermal drift and pushing effects. The test equipment shall have a bandpass of 10 megacycles minimum at the 3 db points.

14. Readings taken during and after test shall not deviate more than 25 percent from readings taken before test, except that initial readings less than 10 percent of the maximum specified limits may increase to no more than 25 percent of the maximum specified limit.

15. Temperature measurements shall be made only after thermal equilibrium has been reached.

16. With an air flow at standard atmospheric conditions of 35 cubic feet per minute at a back pressure not to exceed three inches of water directed at the tube, using a duct which fits snugly to the cooling fins, the rise above ambient specified shall not be exceeded.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.

NOTES: -continued

17. The tuning mechanism shall operate as specified over the entire frequency range.

18. The tuning shaft shall be continuously driven at a speed of approximately 1400 rpm. At the completion of the test, the tube shall meet the tuning and Test Condition 2 requirements. The backlash shall not exceed 10 MHz. During the test, the tuning shaft may not be lubricated. A cycle consists of two complete excursions each in opposite directions through the tuning range of the magnetron.

19. The tuner dial shall be set for frequency F5. Cooling air shall be applied so that under Test Condition 2 the temperature (TA) as measured at the indicated area per Figure 1 shall fall between 80° and 100°C after thermal equilibrium has been reached. Measure and record the actual frequency. The tube shall then be allowed to cool with no voltages applied for at least 15 minutes before the following test. Anode voltage, as specified for Test Condition 2, shall be applied after a maximum of 180 seconds of heater warm-up time. The frequency as measured 15 $\pm$5 seconds after application of pulse voltage shall be within the limit specified from that measured and recorded at the start of the test. The frequency shall then be measured at approximately 3 minute intervals until 20 minutes have elapsed. A graph of frequency versus time shall be constructed using the data. The maximum frequency deviation from the previously recorded thermal equilibrium frequency shall not exceed the limit specified.

20. The tube shall be placed within a test chamber wherein a temperature of 70°C is maintained. The tube shall be exposed to this temperature for a period of 4 hours, at the conclusion of which and within 5 minutes, the tube shall be transferred to a chamber having an internal temperature of -55°C. The tube shall be subjected to this temperature for a period of 4 hours. This constitutes one cycle. The number of complete cycles shall be three. The duration of the exposure at each extreme temperature shall not be less than that specified and may be extended to over-night exposure to prevent interruption of the transfer cycle. At the conclusion of the third cycle, the tube shall be removed from the test chamber, returned to ambient (25°C $\pm$5°C) temperature, and within a period of one hour shall meet Test Methods 4223 Resettability and 4223 Tuning Rate.

21. The magnetron shall be vibrated in each of three mutually perpendicular planes (see Figure 1) through the following amplitudes for both resonance and cycling tests:

5 Hz to 14 Hz	0.375 inch D. A.
14 Hz to 200 Hz	2 g
200 Hz to 1000 Hz	1 g
1000 Hz to 1500 Hz	0.5 g

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:22Z
Check the source to verify that this is the current version before use.

NOTES: -continued

Any mechanical resonance that may be encountered during the test shall be sustained at the frequency and specified amplitude which produced the resonance for the period of time specified in the standard. When more than one resonant frequency condition is encountered, the test shall center on the frequency that produces the most pronounced resonant condition. Should more than one pronounced resonant condition be encountered, the time at resonance shall be equally divided between each of the resonant conditions.

22. To demonstrate compliance with this requirement, power output must be measured at the minimum and maximum power points in the range from F1 to F5.

23. The test shall be performed using a missing pulse detector, i.e., energy comparator. The detector shall be adjusted so that all pulses missing more than 10 percent of the energy content shall be counted. The acceptable limit shall not exceed that specified. The test interval shall be three minutes.

24. The tube shall be mounted in a resonance free jig and vibrated while operating in each of three (3) mutually perpendicular planes (Figure 1) through the following amplitudes for cycling tests:

5 Hz	to	15 Hz	0.2 inch D.A.
15 Hz	to	50 Hz	2 g
50 Hz	to	250 Hz	1.5 g
250 Hz	to	1000 Hz	0.75 g
1000 Hz	to	1500 Hz	0.5 g

25. The magnetron shall be mounted on a test plate and dropped 10 times on each of three mutually perpendicular planes parallel to the reference planes A, B, and C per Figure 1. The shock impulses shall have a duration of 11 $\pm$1 milliseconds as measured at the one-quarter amplitude points. The acceleration shall be 15 g. No physical change shall result and the magnetron shall meet the requirements of Quality Conformance Inspection, Part 1. This is a nondestructive test.

26. First Article Testing: The First Article sample furnished by the contractor/manufacturer shall consist of preproduction tubes in the quantity indicated by Table 1 of MIL-E-1. In addition, the contractor shall furnish along with the test reports written assurance that:

a. The First Article sample is representative of the product to be furnished under the contract.

b. Production articles will be fabricated in the facility that produced the sample tubes.

c. Production articles will be fabricated from new materials.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.

NOTES: -continued

The contractor shall furnish a test plan to the Contracting Officer for approval before proceeding with First Article testing. The test plan shall list all production test and laboratory test facilities to be used in First Article testing and production phases of the contract. Upon receipt of test plan approval, the contractor shall proceed with First Article testing. First Article testing shall include all tests and requirements of this specification and conform to Table 1 of MIL-E-1 where applicable. Upon conclusion of testing, three copies of the test report prepared in accordance with MIL-STD-831 and certified by the Government Representative shall be forwarded along with the test samples to the Contracting Officer for approval.

27. Frequency versus tuner dial divisions shall not deviate more than specified between F1 and F5 in Figure 2 when tuning the tube dial in either direction, except that when tuning in the ccw direction, tuning need not conform between F5-100 and F5.

28. If these tests have been previously performed by the tube manufacturer, and if the material, manufacturing process, and test requirements are the same as when the test(s) were performed, the subject test(s) need not be performed.

29. The power stability life test shall be performed on a multi-pulsewidth line-type modulator containing a shunt overload relay circuit per Figure 5. The modulator shall be designed so that in the event the shunt overload circuit is activated, the modulator and magnetron shall return to a "Standby" condition and "Operate" can be obtained only by manual reset. The test shall be performed under Test Condition 1 at a frequency corresponding to the maximum power output within the specified frequency range, F1 to F5, with a VSWR of 1.5 minimum located at a distance of 1 ±0.05 meters from the magnetron flange. Phase shall be adjusted under Test Condition 3 to that point throughout the test. Testing shall be in accordance with the test schedule below with the change over from Test Condition 1 to Test Condition 3 being accomplished in no more that three (3) seconds and the heater voltage changing directly from that specified in Test Condition 1 to that specified in Test Condition 3 during the switchover.

The test sequence shall be as follows:

Test Schedule		Test Condition 1 Running Condition	Test Condition 3 Test Condition
Cycle	Time (hr)	ib in amps	ib in amps
1	1.8 ±.2	25	30
2	1.8 ±.2	25	30
3	1.8 ±.2	25	30
4	1.8 ±.2	25	30
5	15.5 ±.5	25	30

At each switchover, the tube shall be operated in Test Condition 3 for 10 minutes before returning to Test Condition 1. Repeat cycles 1 to 5 inclusive until the specified life is attained. The time required to complete cycles 1 to 5 inclusive shall be 24 ±.5 hours.

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.

NOTES: -continued

30. Peak current through the magnetron shall alternately be the limits as specified under test condition. Test shall be run to exclude the effects of thermal drift and frequency instability not due to pushing.

31. Except that "month" in paragraph 4.6.1.8 of MIL-E-1 be replaced with "2 months."

32. The intermittent Life test shall be conducted while the phase of a 1.5 minimum VSWR located at a distance of 1 ±0.05 meters from the magnetron flange is uniformly and continuously cycled through 360 electrical degrees with a time interval of approximately 30 minutes per cycle. Simultaneously the magnetron frequency, starting at F1, increasing to F5, then decreasing to F1 (see Figure 2) shall be changed approximately 100 megahertz increments each eight hours.

Condition:	Ib	Ef	Duration (minutes)
Standby	0	9.0	3
Test (1)	10.0	8.0	6
Test (2)	20.0	6.0	21
Off	0	0	10

Custodian:
Air Force - 85

Preparing activity:
Air Force - 85

Review activities:
Air Force - 80

(Project 5960-F978)

User activities:
Air Force - 11, 84

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.



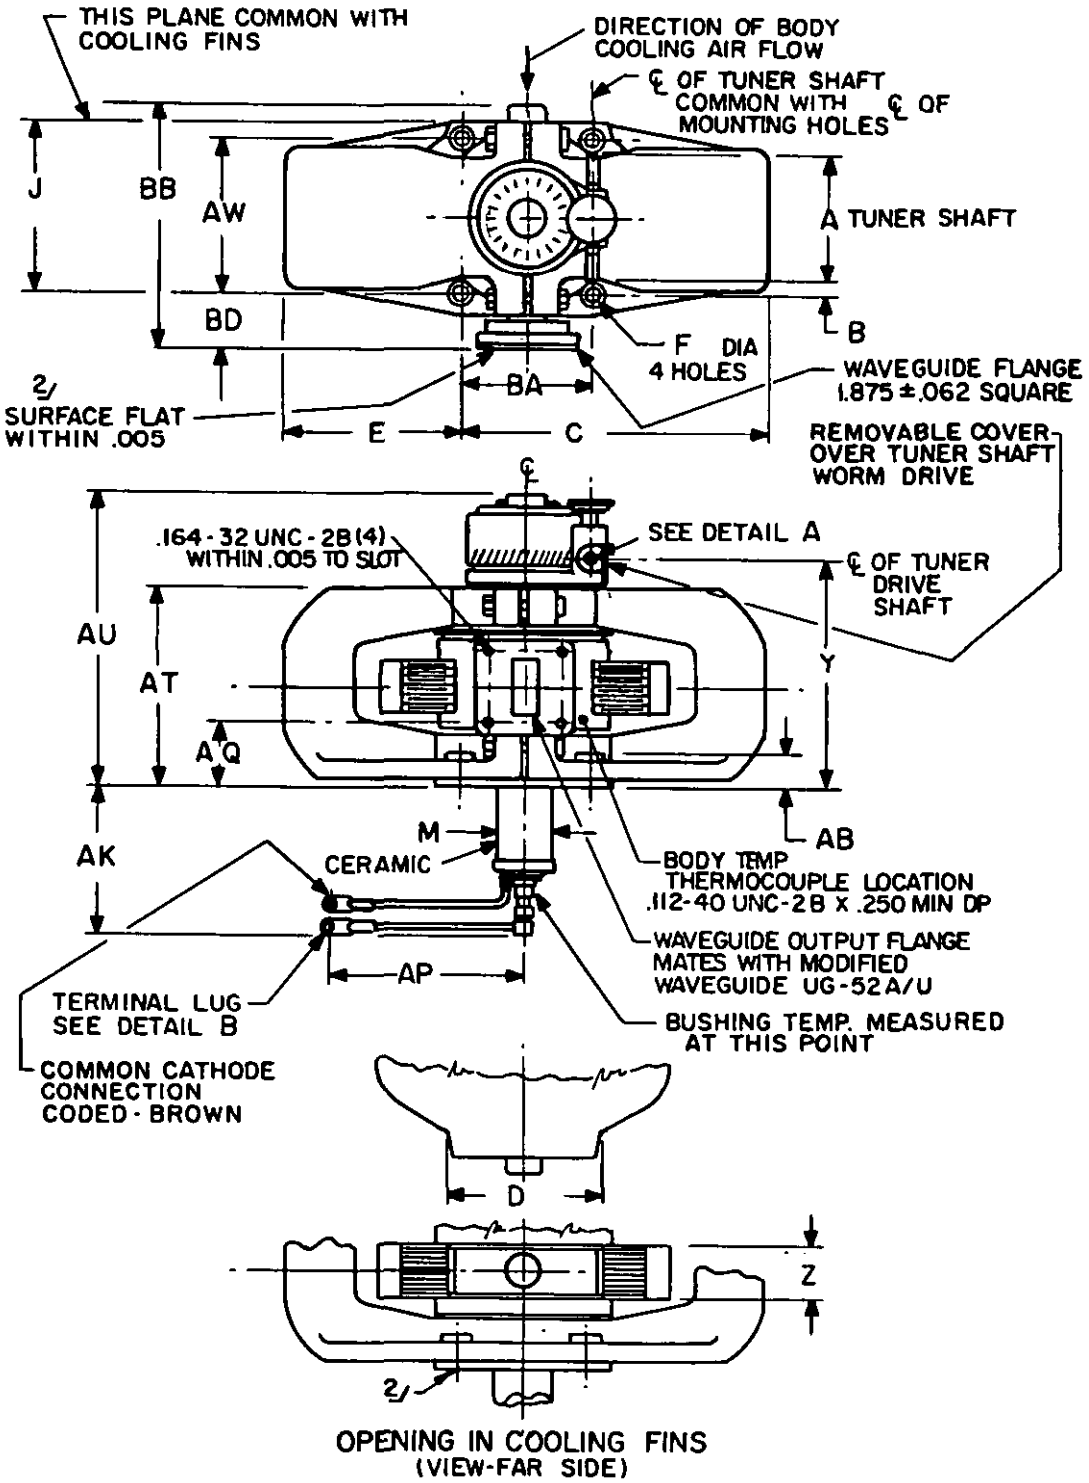


FIGURE 1 Outline configuration of tube type 8896

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

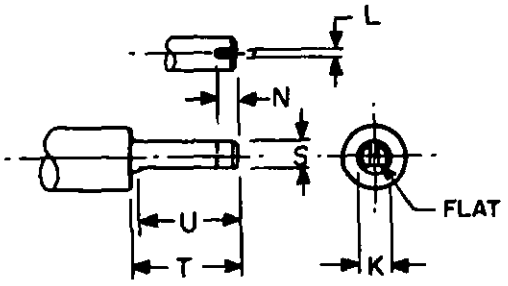

DETAIL A
(TYPICAL BOTH ENDS)

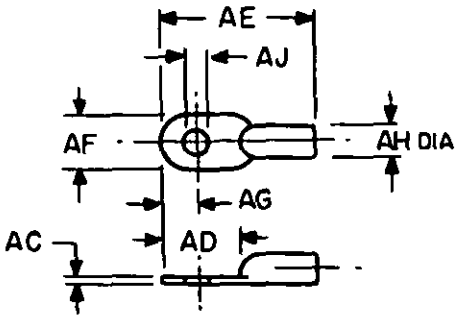

DETAIL B

DIMENSIONS				
LTR	INCHES		MM	
	MIN	MAX	MIN	MAX
QUALITY CONFORMANCE INSPECTION, PART 1				
B	.189	.375	4.80	9.53
F	.277	.287	7.04	7.29
K	.1865	.1895	4.74	4.81
L	.040	.045	1.02	1.14
M	-	2.250	-	57.15
Y	4.175	4.425	106.05	112.40
AK	-	3.000	-	76.20
AP	3.625	4.125	92.08	104.78
AQ	1.125	1.285	28.58	32.64
AU	-	6.625	-	168.28
BB	-	4.975	-	126.37
BD	.932	1.062	23.67	26.97
QUALITY CONFORMANCE INSPECTION, PART 2				
A	2.370	2.380	60.20	60.45
S	.151	.161	3.84	4.09
AW	2.985	3.015	75.82	76.58
BA	2.485	2.515	63.12	63.88

LTR	INCHES		MM	
	MIN	MAX	MIN	MAX
QUALITY CONFORMANCE INSPECTION, PART3				
C	-	6.375	-	161.93
E	-	3.875	-	98.43
J	3.250	3.500	82.55	88.90
Z	.938	1.080	23.83	27.43
AF	-	.300	-	7.62
AJ	.165	-	4.19	-
NOMINAL DIMENSIONS				
D	3.375		85.73	
N	.125		3.18	
U	.625		15.88	
T	.688		17.48	
AB	.600		15.24	
AC	.050		1.27	
AD	.468		11.89	
AE	.938		23.83	
AH	.188		4.78	
AG	.218		5.54	
AT	3.875		98.43	

NOTE :
1. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.
2/ WAVEGUIDE FLANGE MTG SURFACE, MOUNTING PLATE SURFACE AREA AND JOINTS WITHIN THESE AREAS MUST BE CAPABLE OF PROVIDING A HERMETIC SEAL.

FIGURE 1 - Continued

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.


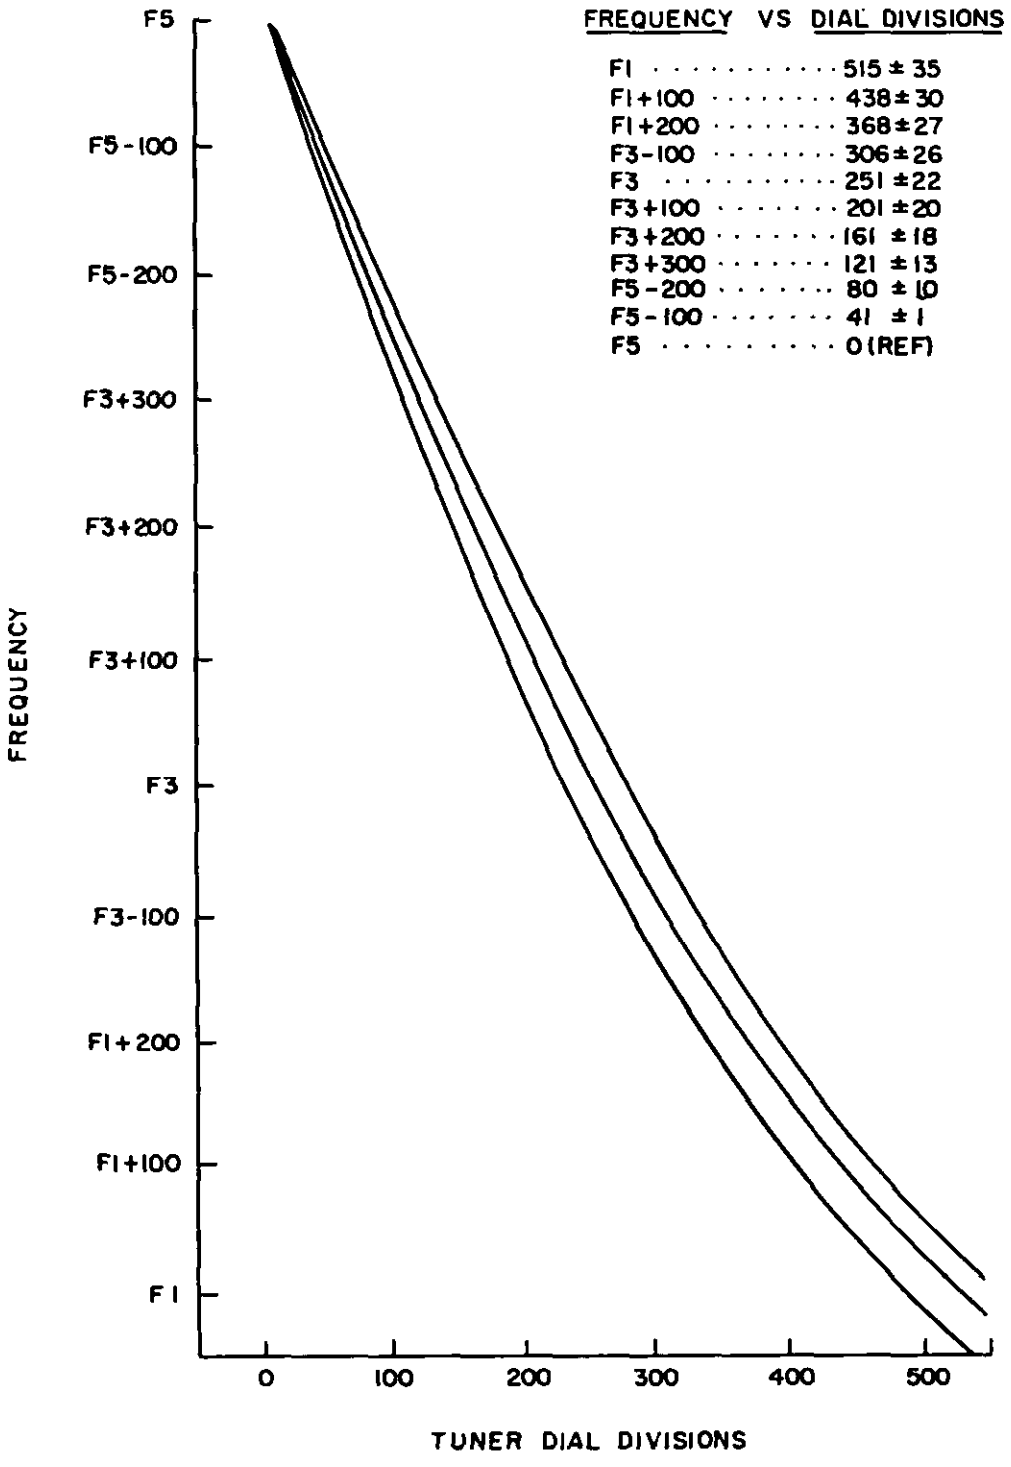


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

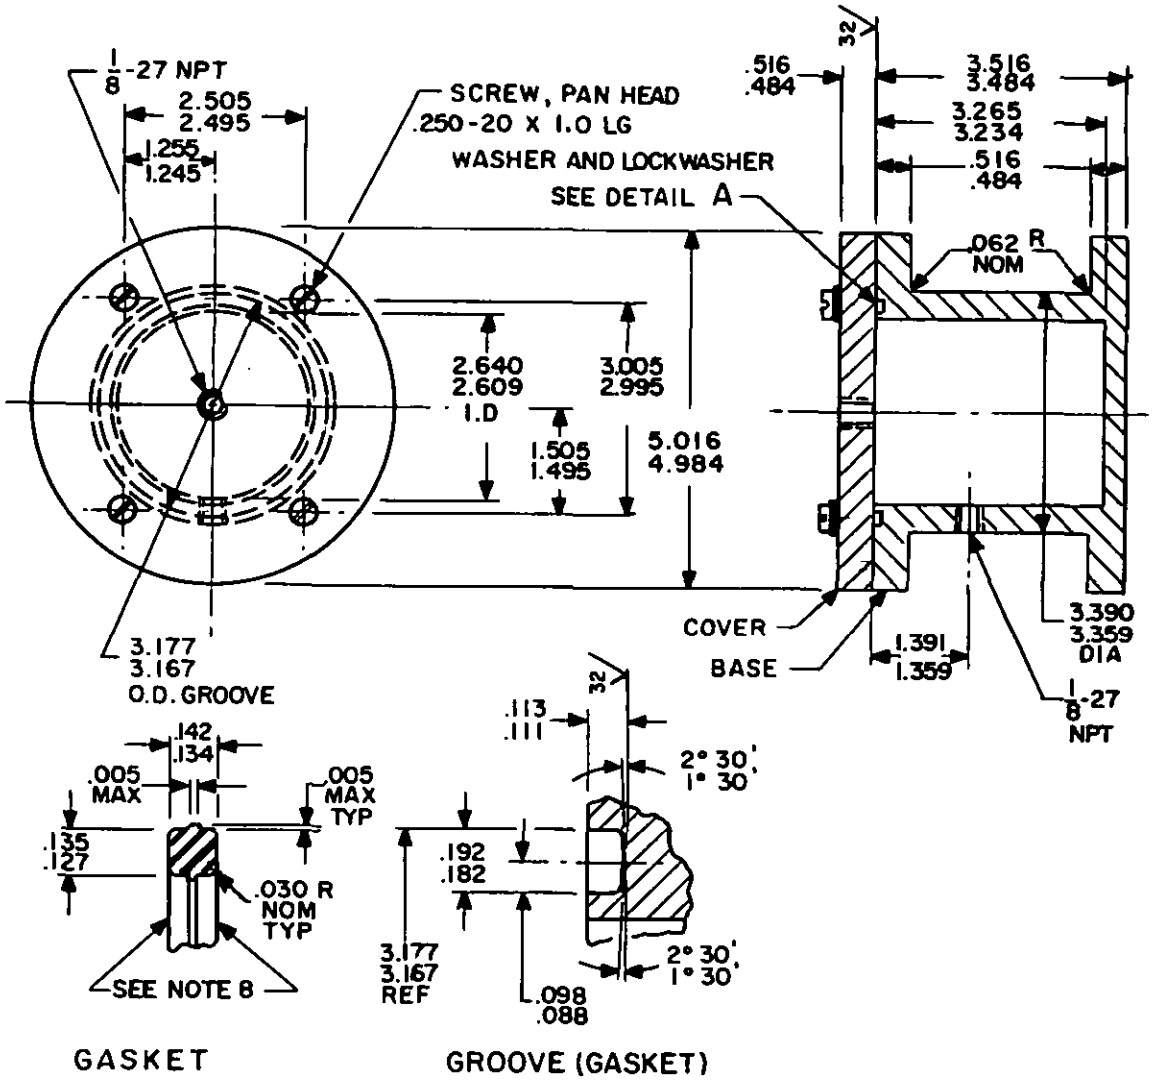


DETAIL A

NOTES:

1. MATERIAL (BASE AND COVER) CRES PER QQ-S-764, TYPE 303, COND A.
2. MATERIAL (GASKET) LS-53 FLUOROSILICONE RUBBER 45 ± 5 DURO. SHORE A.
3. DIMENSIONS ARE IN INCHES.
4. DIAMETERS SHALL BE CONCENTRIC WITHIN .005 T.I.R.
5. REMOVE ALL BURRS, BREAK SHARP EDGES.
6. SURFACES OF BASE AND COVER SHALL BE $\sqrt{125}$ FINISH UNLESS AND AS NOTED.
7. SURFACES WITH $\sqrt{32}$ FINISH SHALL BE FREE OF TOOL MARKS AND SCRATCHES
8. GASKET SURFACES SURFACES INDICATED SHALL BE FREE OF ANY DEFECTS, BLEMISHES OR SURFACE IRREGULARITIES.
9. PASSIVATE PER MIL-E-14072 (E 300) (BASE & COVER)
10. THIS FIXTURE TO BE USED FOR THE PRESSURIZATION TEST.

FIGURE 3. Magnetron input test fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

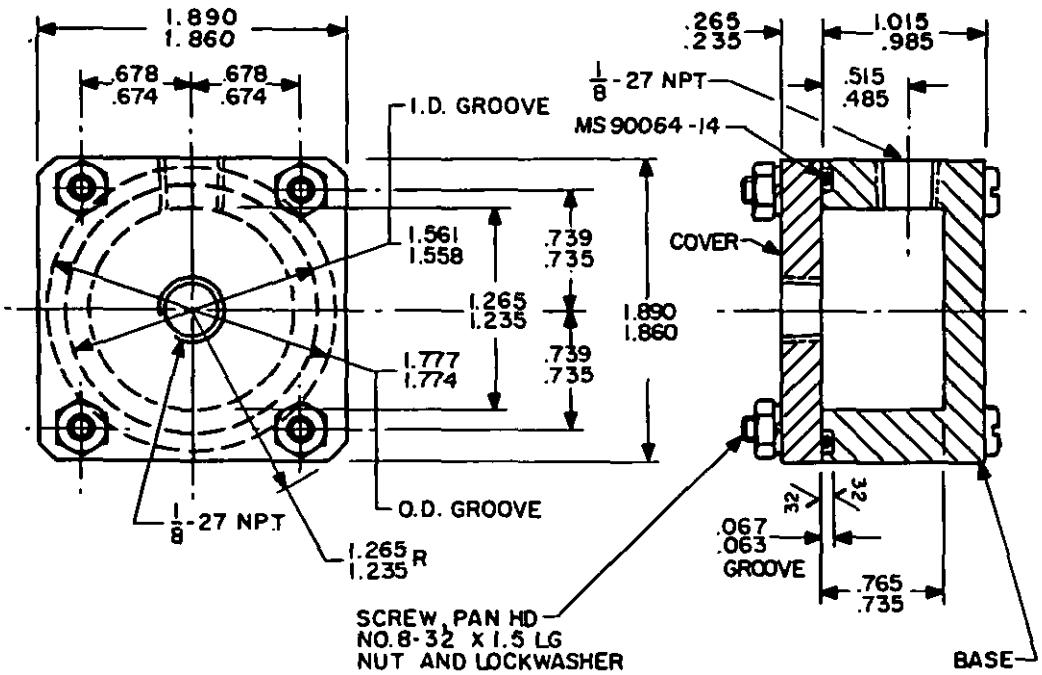


NOTES

1. MATERIAL: (BASE AND COVER) CRES PER QQ-S-764, TYPE 303, COND A.
2. DIMENSIONS ARE IN INCHES.
3. DIAMETERS SHALL BE CONCENTRIC WITHIN .005 T.I.R.
4. REMOVE ALL BURRS, BREAK SHARP EDGES.
5. SURFACES WITH $\sqrt{32}$ FINISH SHALL BE FREE OF DEFECTS, BLEMISHES, TOOL MARKS SCRATCHES OR SURFACE IRREGULARITIES.
6. PASSIVATE PER MIL-E-14072 (E300).
7. THIS FIXTURE IS TO BE USED FOR THE PRESSURIZATION TEST.

FIGURE 4. Magnetron output test fixture

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:22Z
Check the source to verify that this is the current version before use.

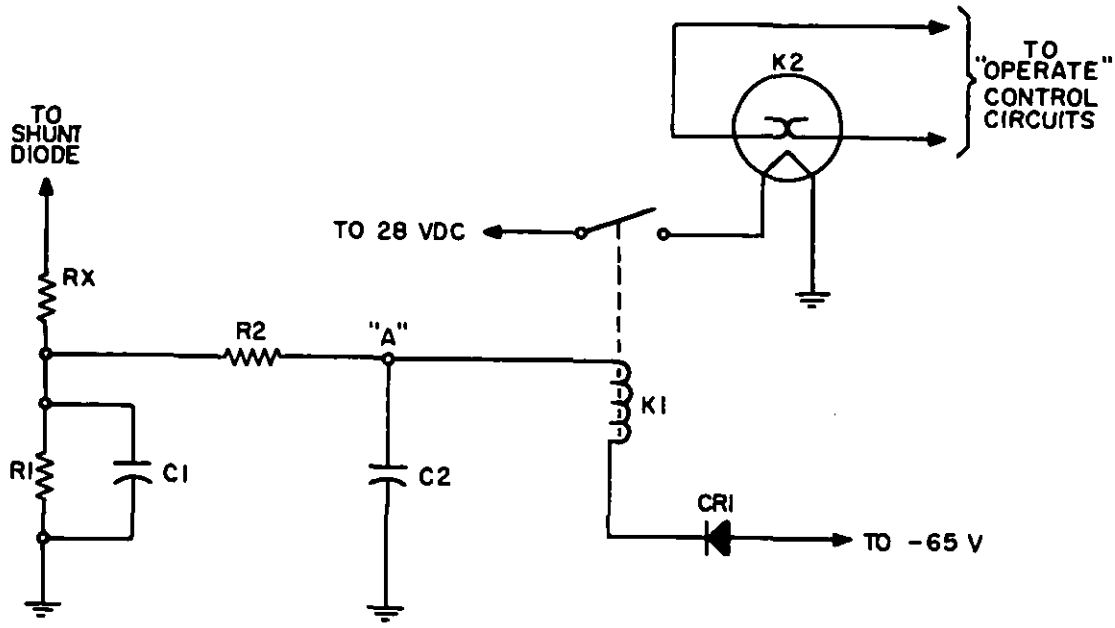

C1 - 1.0 μF, 600 V, 20%
C2 - 1.0 μF, 600 V, 20%

CR1 - IN484A

K1 - RELAY, ARMATURE, CURRENT SENSITIVE
COIL, DC RESISTANCE 2500 ± 10% OHMS
PULL IN CURRENT: 2.9 ± .2 mA
DROP OUT CURRENT: 1.16 mA OR LESS
SIMILAR TO ALLIED CONTROL CO.
NEW YORK, N.Y. TYPE RSHX-145

K2 - RELAY, THERMAL
TIME DELAY: 1.5 SEC AT 24 V HEATER VOLTAGE
SIMILAR TO G.V. CONTROLS INC.
EAST ORANGE, N.J. TYPE HM-01-NC-28

R1 - 4K, 5W, 1%
R2 - 10K, 5W, 1%
RX - TO BE DETERMINED BY SUPPLIER, SO THAT WHEN OUTPUT OF PFN IS SHORTED TO GROUND, VOLTAGE AT "A" IS -95 V.

FIGURE 5. Power stability life test control circuit

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-E-1/1705A (USAF) Electron Tube, Magnetron Type 8896

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

C 1 6 0 6 1

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:22Z
Check the source to verify that this is the current version before use.