MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, RECTANGULAR, RACK AND PANEL, POLARIZED CENTER JACKSCREW OR GUIDEPIN STYLE, CRIMP TYPE REMOVABLE SOCKET CONTACTS, SIZE 16

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the connectors described herein shall consist of this specification and the latest issue of MIL-C-28748.

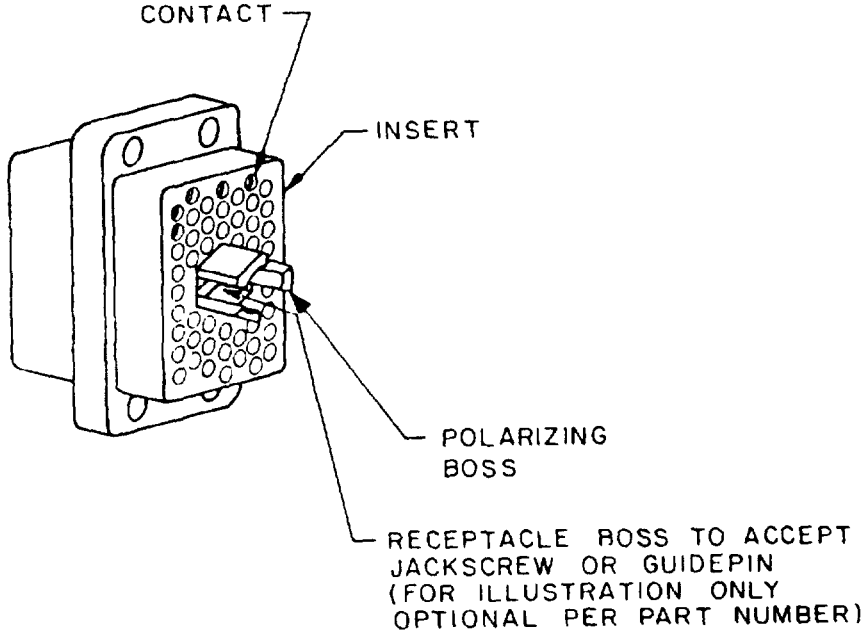


FIGURE 1. Connector.

(E) denotes changes

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:17Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See applicable listed MS sheets for insert and contacts.

Service tooling: See applicable listed MS sheets for servicing tools.

Mating connectors MIL-C-28748/9.

Part number As shown in the following example:

EXAMPLE OF PART NUMBER.

(See part number code)

M 28748/10	A	0	A	L	1A
Basic number of specification sheet	Insert	Shield and shield clamp location or retaining plate	Shell type	Jackscrews or guidepins	Contacts

PART NUMBER CODE:

Insert with thru mounting hole	Number of contacts
A - MS18156	10
B - MS18158	20
C - MS18160	36
D - MS18162	52
E - MS18164	80
F - MS17779	104
G - MS18166	158
H - MS18168	212
Insert with mounting sleeve	**Number of contacts**
J - MS18156	10
K - MS18158	20
L - MS18160	36
M - MS18162	52
N - MS18164	80
P - MS17779	104
R - MS18166	158
S - MS18168	212

Shield and shield clamp location or retaining plate

0 - None included

Shell type (polarization) (see note)
A - 1 N
B - 1 V
C - 1 W
D - 1 X
E - 1 Y
F - 1 Z
N - 2 N
V - 2 V
W - 2 W
X - 2 X
Y - 2 Y
Z - 2 Z
G - 3 N
H - 3 V
J - 3 W
K - 3 X
L - 3 Y
M - 3 Z
P - 4 N
Q - 4 V
R - 4 W
S - 4 X
T - 4 Y
U - 4 Z

See applicable insert MS part number

Jackscrews or guidepins

L - Long jackscrew from applicable insert MS.
G - Guidepin from applicable MS.
0 - Boss for jackscrew
B - Boss for guidepin.

NOTE Shell type polarization positions A through F are for use with jackscrews, N through Z are for use with the boss for jackscrews, G through M are for use with guidepins, and P through U are for use with the boss for guidepins.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:17Z
Check the source to verify that this is the current version before use.

TABLE I. Contact size percent.

Contact	Size 16-16 M39029/37-280 1/ (percent)	Size 16-20 M39029/37-279 1/ (percent)	Size 20-20 shielded M39029/80-438 2/ M39029/80-439 2/ (percent)
1A	100	0	0
1B	90	0	10
1C	80	0	20
1D	70	0	30
1E	60	0	40
1F	50	0	50
1G	40	0	60
1H	30	0	70
1J	20	0	80
1K	10	0	90
1L	0	0	100
1Z	0	0	0
2A	0	100	0
2B	0	90	10
2C	0	80	20
2D	0	70	30
2E	0	60	40
2F	0	50	50
2G	0	40	60
2H	0	30	70
2J	0	20	80
2K	0	10	90

1/ Basic crimp tool: M22520/1-01.
Positioner M22520/1-03(A).
Installing tool: M81969/18-01.
Removal tool M81969/20-01.

2/ Basic crimp tool TMDC16CX4 (Hughes).
Installing tool. M81969/17-04.
Removal tool M81969/19-08.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities
Army - AR, AT, MI
Navy - AS, OS, SH
Air Force - 11, 99
DLA - ES

User activities
Army - AV, ME
Navy - MC

Preparing activity
Navy - EC

Agent
DLA - ES

(Project 5935-3572-02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:17Z
Check the source to verify that this is the current version before use.