
INCH-POUND
MIL-DTL-28748/6E
9 September 2004
SUPERSEDING
MIL-C-28748/6D
25 March 1993

DETAIL SPECIFICATION SHEET

CONNECTORS, ELECTRICAL RECTANGULAR, RACK AND PANEL, SOLDER TYPE SOCKET CONTACTS, SIZE 20

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-28748.

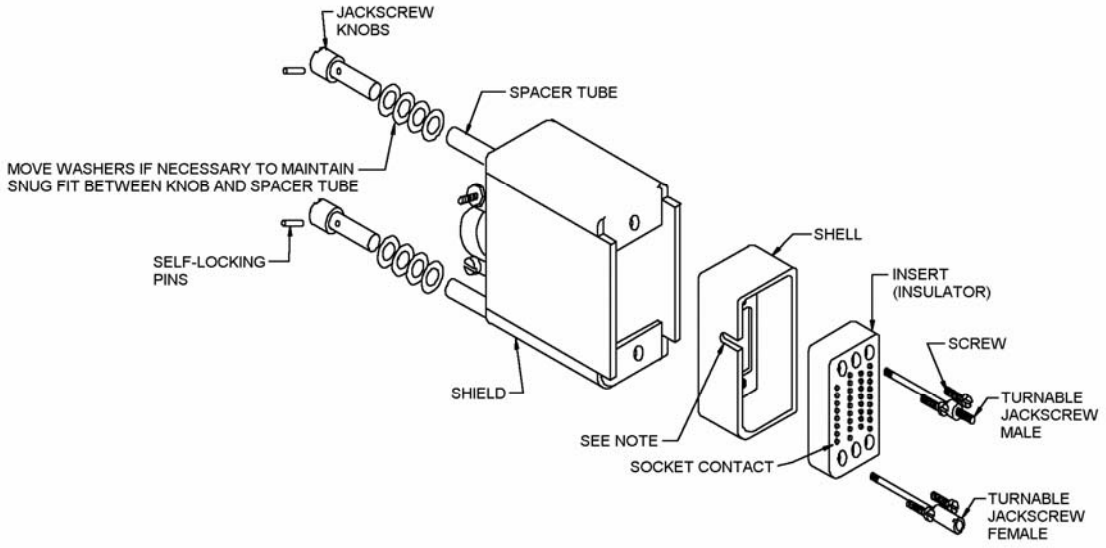


Connector, receptacle configuration shown.

NOTE: The polarization feature (pin on the plug shell, groove on the receptacle shell) shall be adjacent to the side closest to the number 1 or A contact position.

Configuration A

FIGURE 1. Connector with shield, plug shell, and turnable jackscrews.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

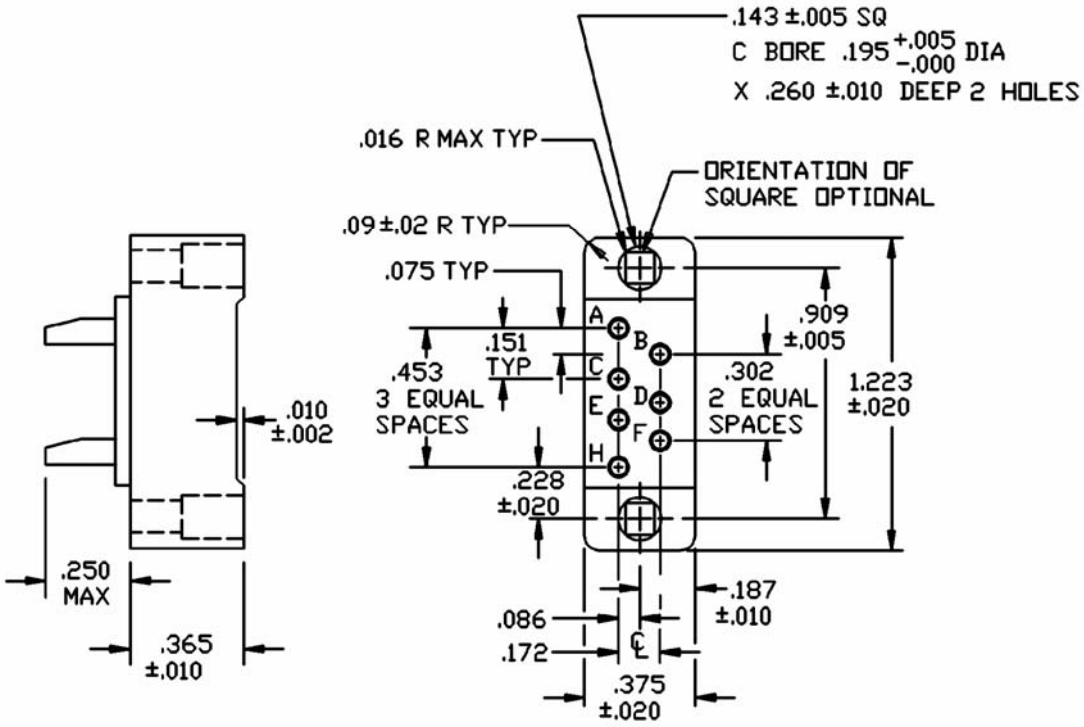


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.09	2.3	.250	6.35
.005	0.13	.143	3.63	.260	6.60
.010	0.25	.151	3.84	.302	7.67
.016	0.41	.172	4.37	.365	9.27
.02	0.5	.187	4.75	.375	9.53
.020	0.51	.195	4.95	.453	11.50
.075	1.91	.200	5.08	.909	23.10
.086	2.18	.228	5.79	1.223	31.10

Insert with 7 contacts

Insert designator A

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

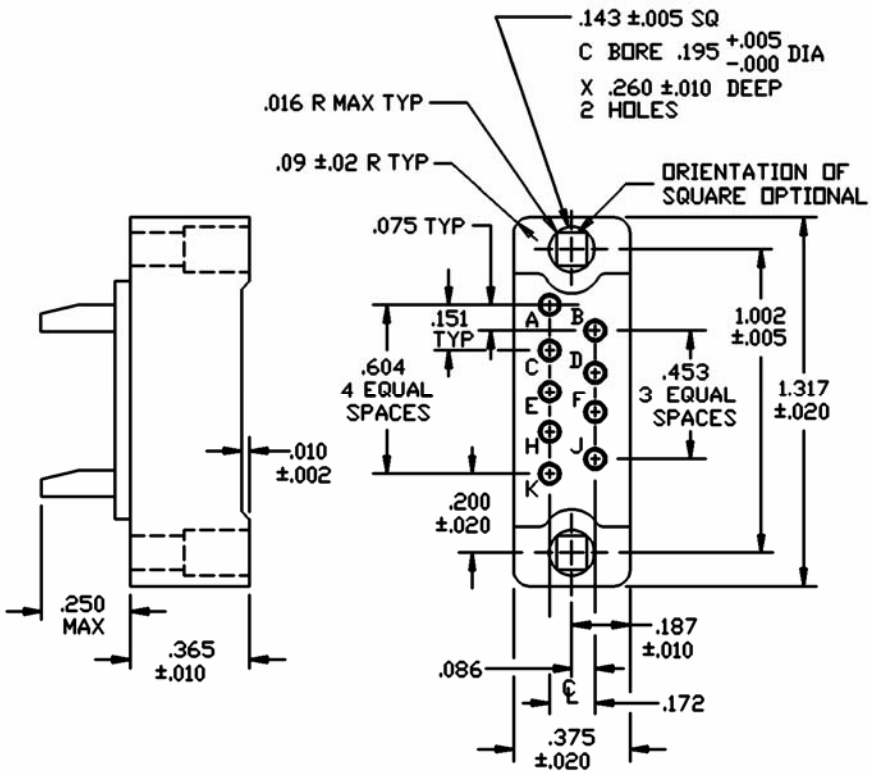


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.09	2.3	.260	6.60
.005	0.13	.143	3.63	.365	9.27
.010	0.25	.151	3.84	.375	9.53
.016	0.41	.172	4.37	.453	11.50
.02	0.5	.187	4.75	.604	15.30
.020	0.51	.195	4.95	1.002	25.45
.075	1.91	.200	5.08	1.317	33.45
.086	2.18	.250	6.35		

Insert with 9 contacts

Insert designator B

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

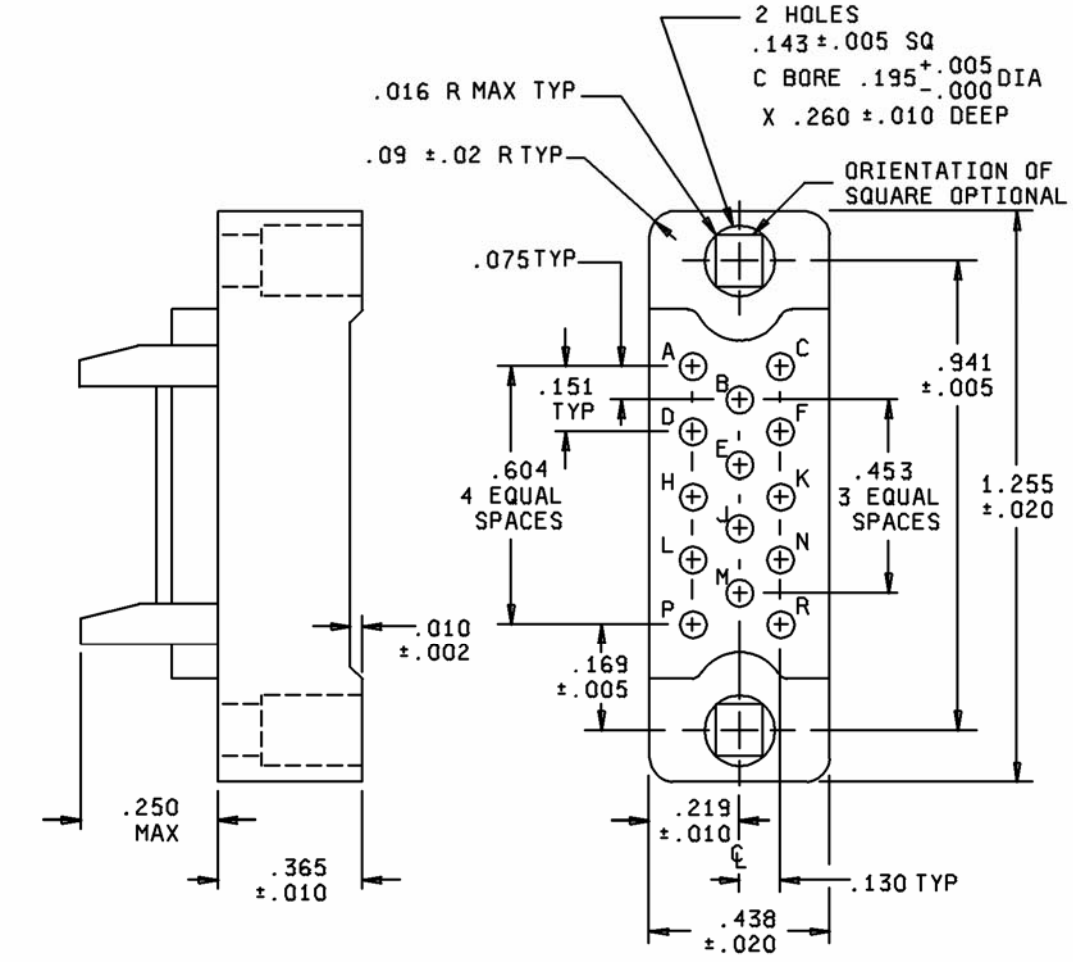


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.130	3.30	.260	6.60
.005	0.13	.143	3.63	.365	9.27
.010	0.25	.151	3.84	.438	11.13
.016	0.41	.169	4.29	.453	11.50
.02	0.5	.195	4.95	.604	15.30
.020	0.51	.219	5.56	.941	23.90
.075	1.91	.250	6.35	1.255	31.88
.09	2.3				

Insert with 14 contacts

Insert designator C

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

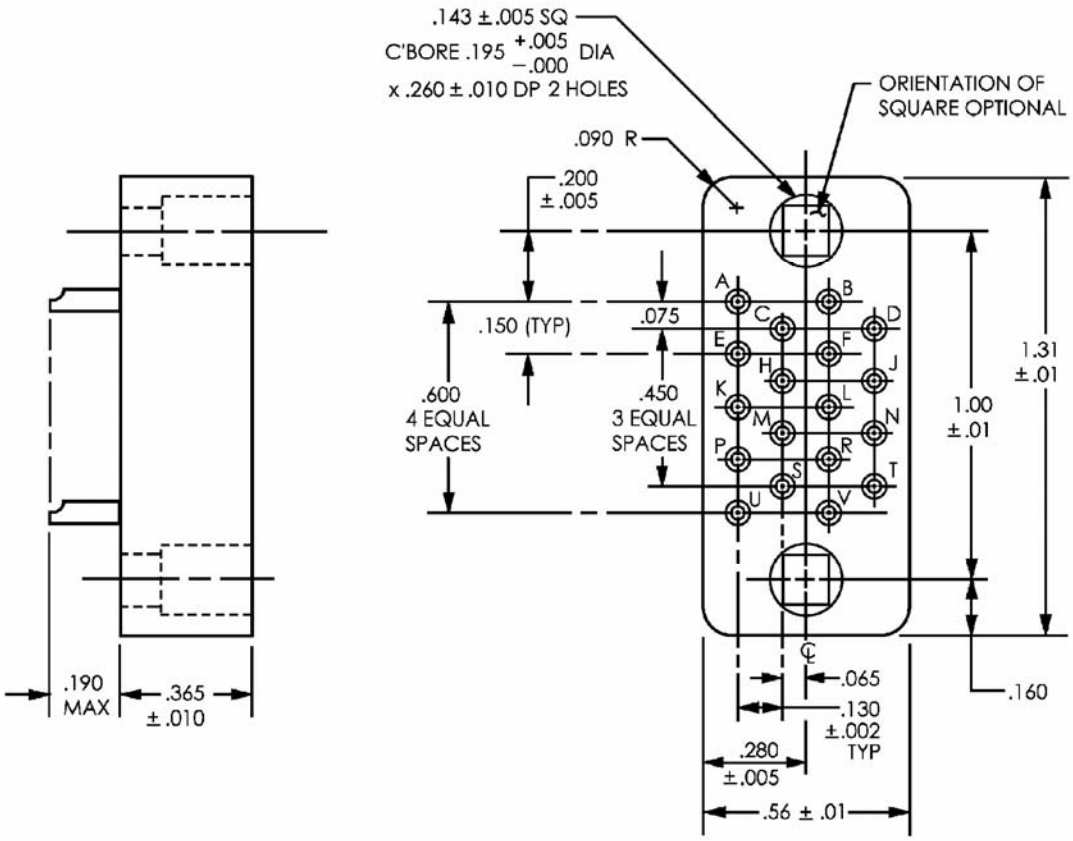


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.130	3.30	.260	6.60
.005	0.13	.143	3.63	.280	7.11
.010	0.25	.150	3.81	.365	9.27
.01	0.3	.155	3.94	.450	11.43
.065	1.65	.160	4.06	.56	14.2
.075	1.91	.190	4.83	.600	15.24
.090	2.29	.195	4.95	1.00	25.40
		.200	5.08	1.31	33.27

Insert with 18 contacts

Insert designator S

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

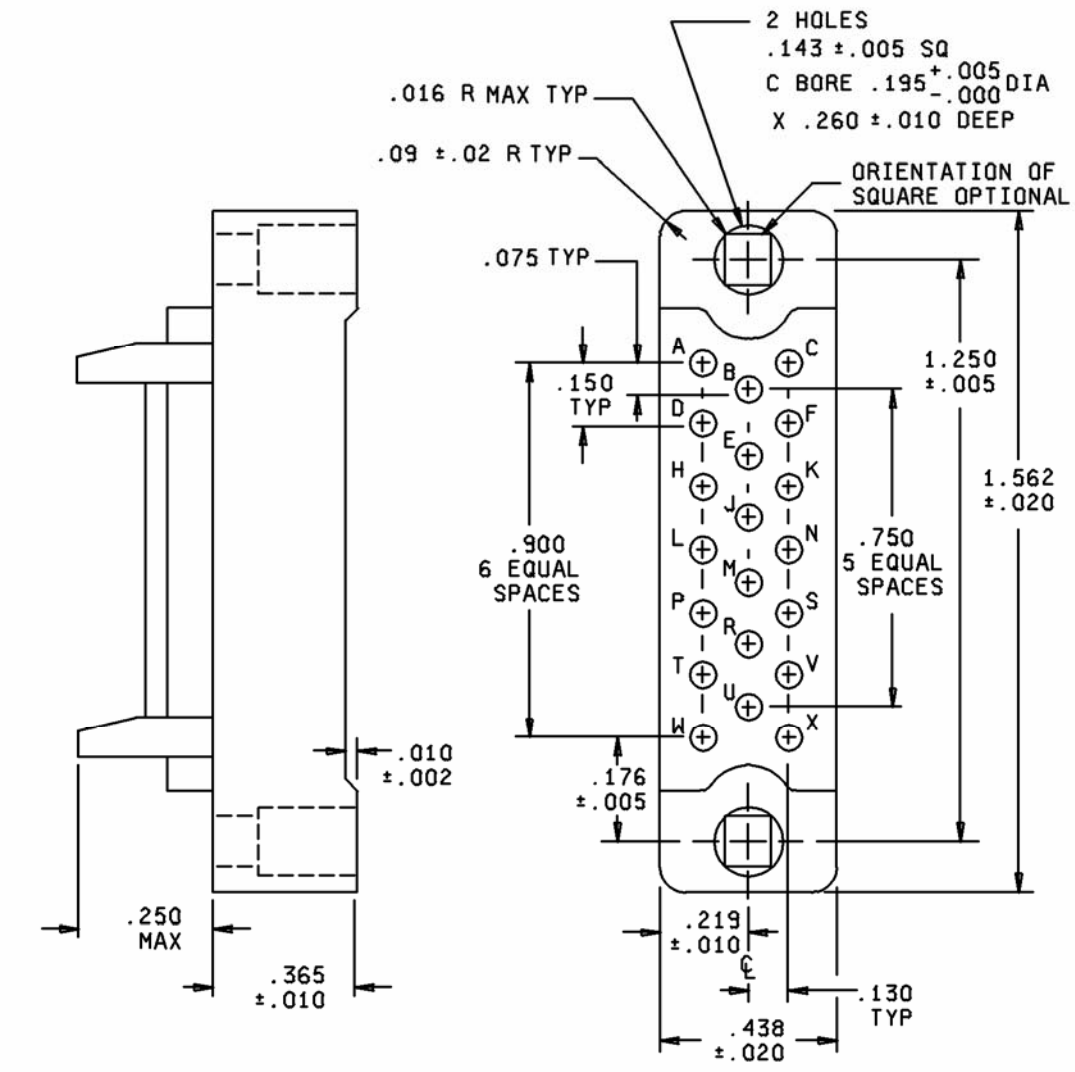


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.09	2.3	.250	6.35
.005	0.13	.130	3.30	.365	9.27
.010	0.25	.143	3.63	.438	11.13
.016	0.41	.150	3.81	.750	19.00
.02	0.5	.176	4.47	.900	22.90
.020	0.51	.195	4.95	1.250	31.80
.075	1.91	.219	5.56	1.562	39.70

Insert with 20 contacts

Insert designator D

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

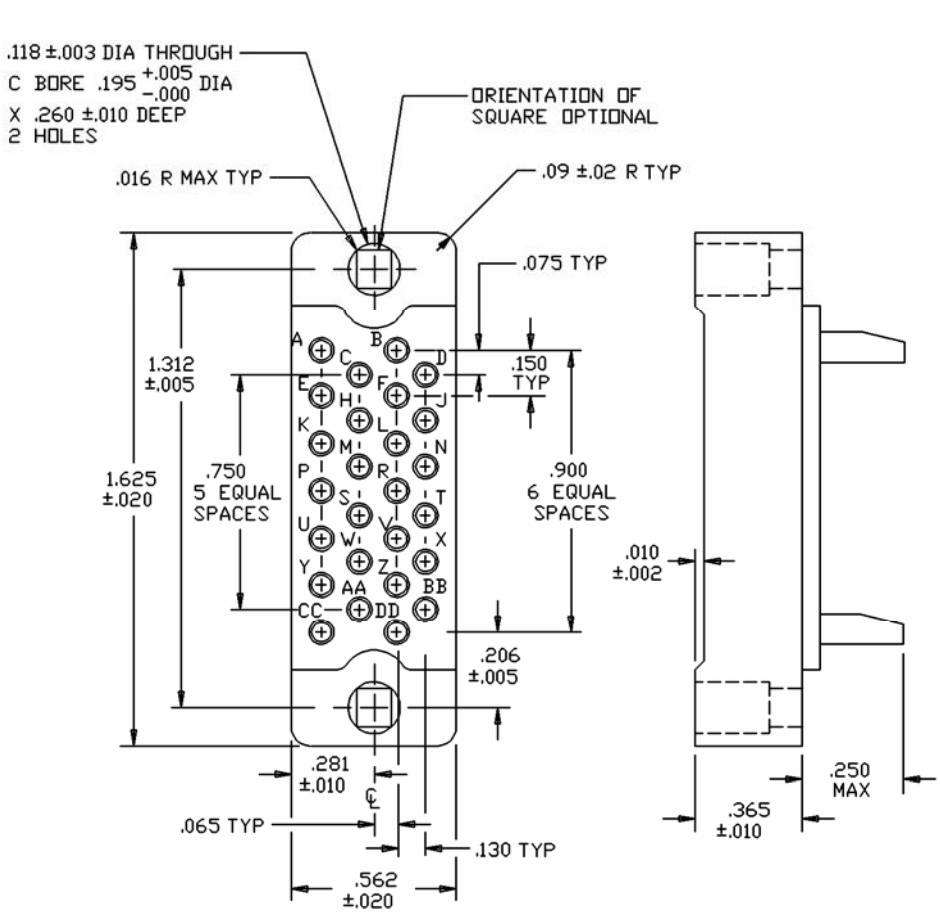


Inches	mm	Inches	mm	Inches	mm
.002	0.05	.075	1.90	.260	6.60
.003	0.08	.09	2.29	.281	7.14
.005	0.13	.118	3.00	.365	9.27
.010	0.25	.130	1.33	.562	14.30
.016	0.41	.150	3.81	.750	19.00
.02	0.5	.195	4.95	.900	22.90
.020	0.51	.206	5.23	1.312	33.32
.065	1.65	.250	6.35	1.625	41.27

Insert with 26 contacts

Insert designator E

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

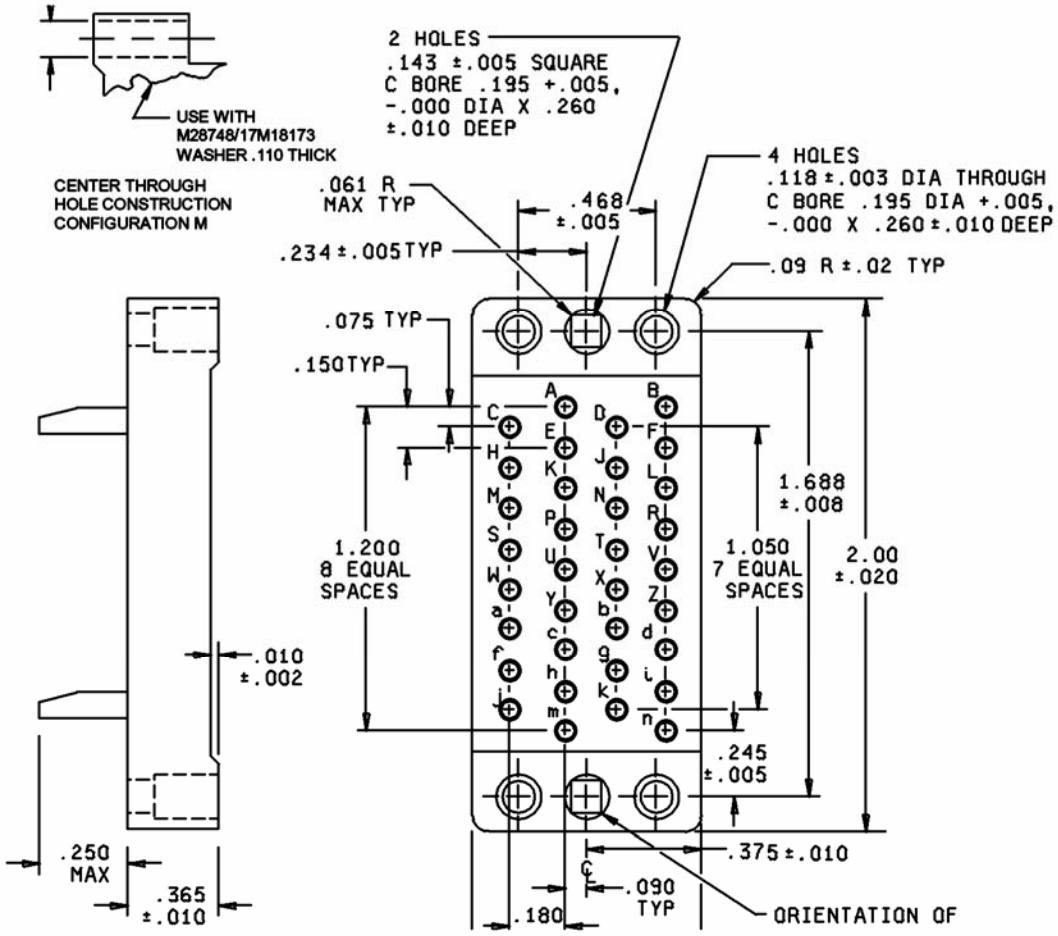

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.02	0.5	.090	2.29	.195	4.95	.375	9.53
.003	0.08	.020	0.51	.110	2.79	.234	5.94	.468	11.89
.005	0.13	.061	1.55	.118	3.00	.245	6.22	1.050	26.67
.008	0.20	.075	1.91	.143	3.63	.250	6.35	1.200	30.48
.010	0.25	.09	2.3	.156	3.96	.260	6.60	1.688	42.67
				.180	4.57	.365	9.27	2.00	50.80


Configuration F - Suitable for all applications, except one-piece jackscrews.
Configuration M - For long jackscrews and shield only (through hole alternate construction).

Insert with 34 contacts

Insert designators F and M

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

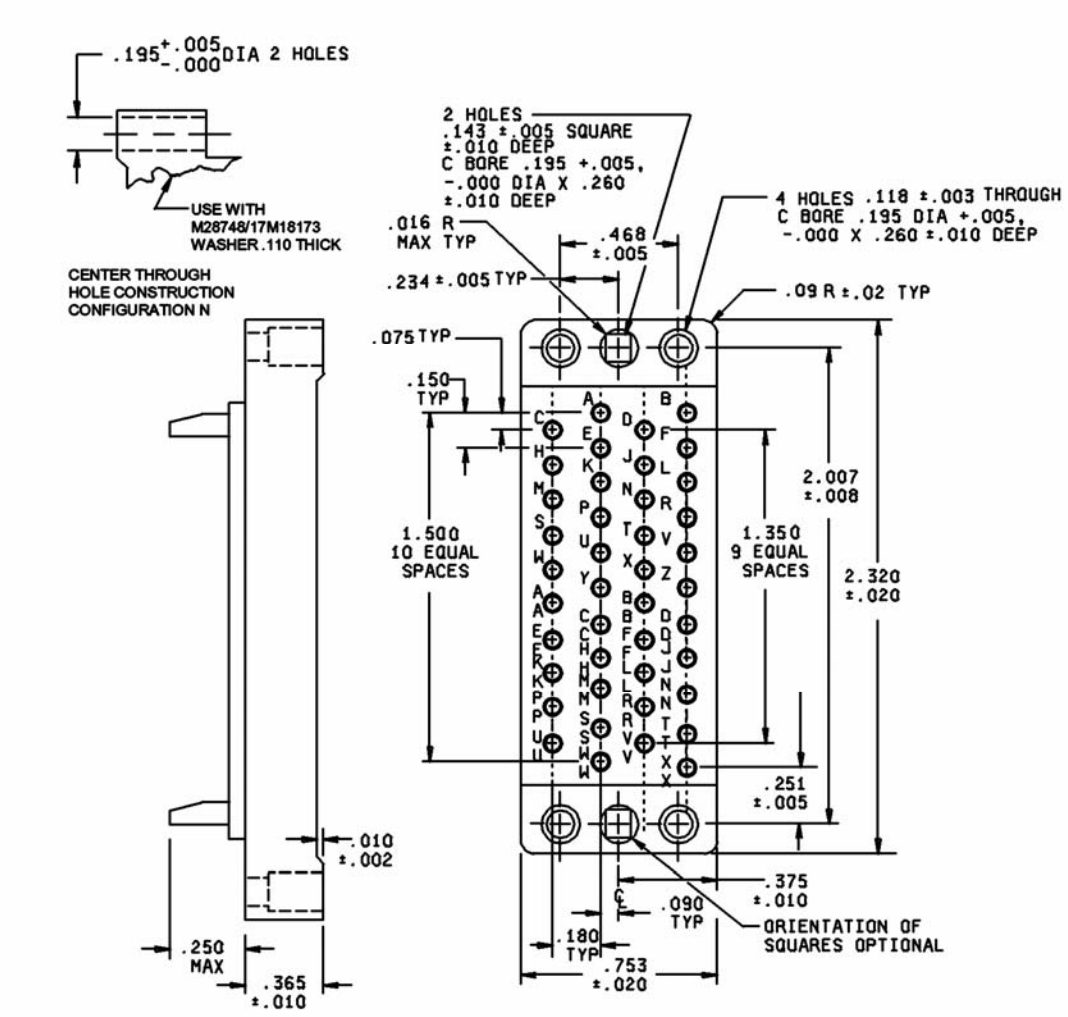

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.020	0.51	.150	3.81	.365	9.27
.003	0.08	.075	1.91	.180	4.57	.375	9.53
.005	0.13	.09	2.29	.190	4.83	.470	11.94
.008	0.20	.090	2.29	.195	4.95	.753	19.13
.010	0.25	.110	2.79	.234	5.94	1.350	34.29
.016	0.41	.118	3.00	.250	6.35	1.500	38.10
.02	0.5	.143	3.63	.251	6.38	2.007	50.98
				.260	6.60	2.320	58.93


Configuration G - Suitable for all applications, except one-piece jackscrews.
Configuration N - For long jackscrews and shield only (through hole alternate construction).

Insert with 42 contacts

Insert designators G and N

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

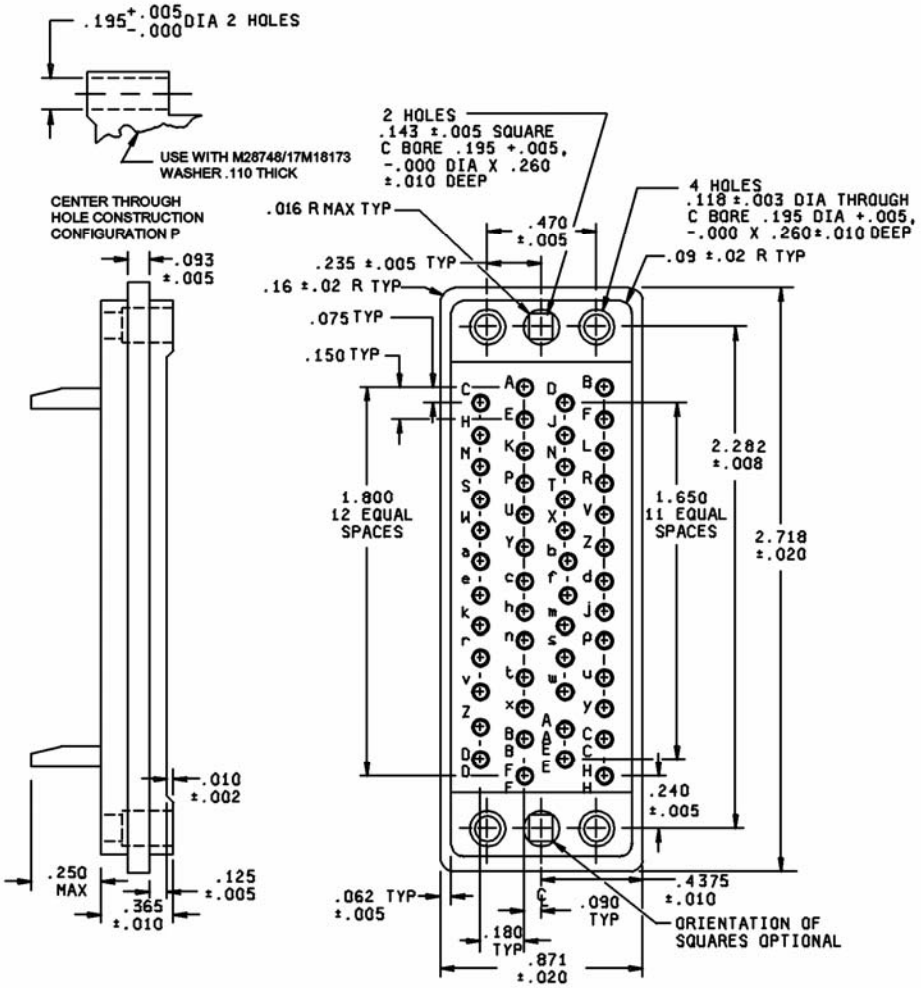

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.02	0.5	.093	2.36	.180	4.57	.4375	11.113
.003	0.08	.020	0.51	.110	2.79	.195	4.95	.470	31.88
.005	0.13	.062	1.57	.118	3.00	.235	5.97	.871	22.12
.008	0.20	.075	1.91	.125	3.18	.24	6.10	1.650	41.91
.010	0.25	.09	2.29	.143	3.63	.250	6.35	1.800	45.72
.016	0.41	.090	2.29	.150	3.81	.260	6.60	2.282	57.96
						.365	9.27	2.718	69.04


Configuration H - Suitable for all applications, except one-piece jackscrews.
Configuration P - For long jackscrews and shield only (through hole alternate construction).

Insert with 50 contacts

Insert designators H and P

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

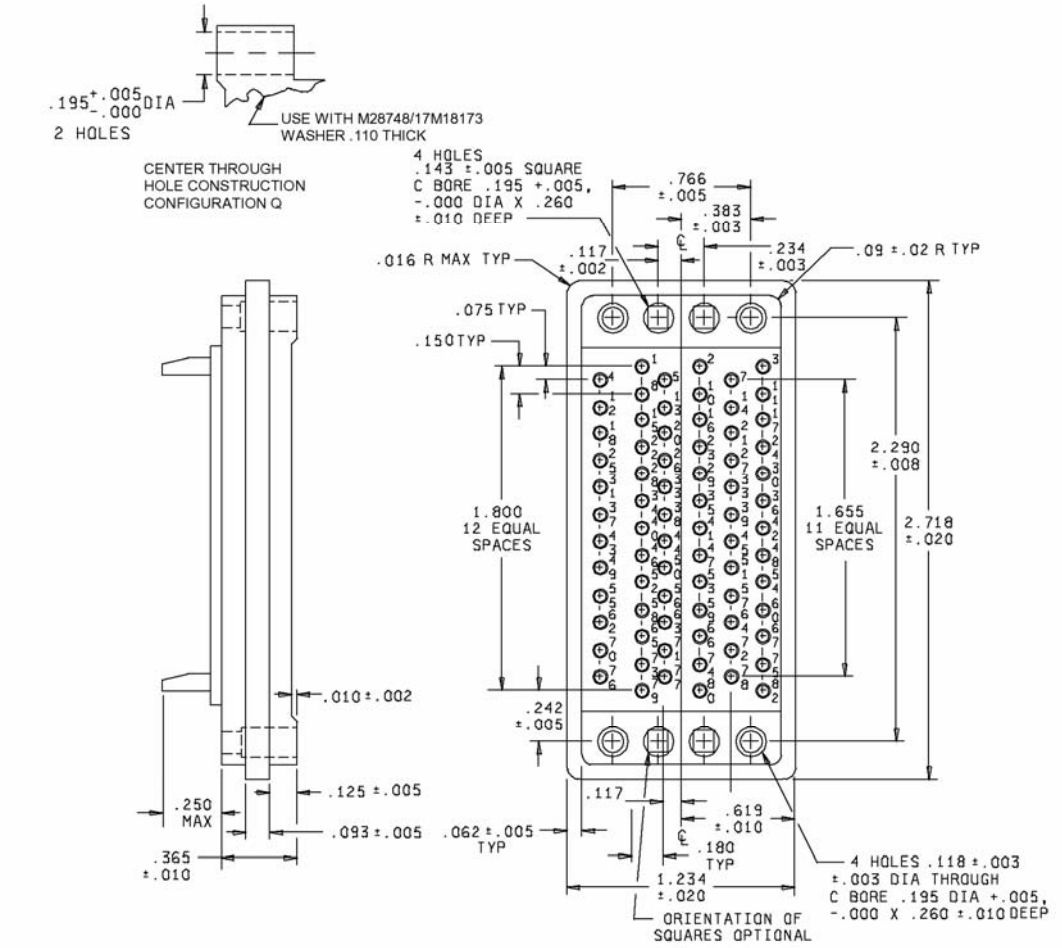

Inches	mm	Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.02	0.5	.110	2.79	.195	4.95	.619	15.72
.003	0.08	.020	0.51	.117	2.97	.234	5.97	.766	19.45
.005	0.13	.062	1.57	.118	3.00	.242	6.15	1.234	31.34
.008	0.20	.075	1.91	.125	3.18	.250	6.35	1.655	42.04
.010	0.25	.09	2.3	.143	3.63	.260	6.60	1.800	45.73
.016	0.41	.093	2.36	.150	3.81	.365	9.72	2.290	58.17
				.180	4.57	.383	9.73	2.718	69.04


Configuration J - Suitable for all applications, except one-piece jackscrews.
Configuration Q - For long jackscrews and shield only (through hole alternate construction).

Insert with 75 contacts

Insert designators J and Q

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

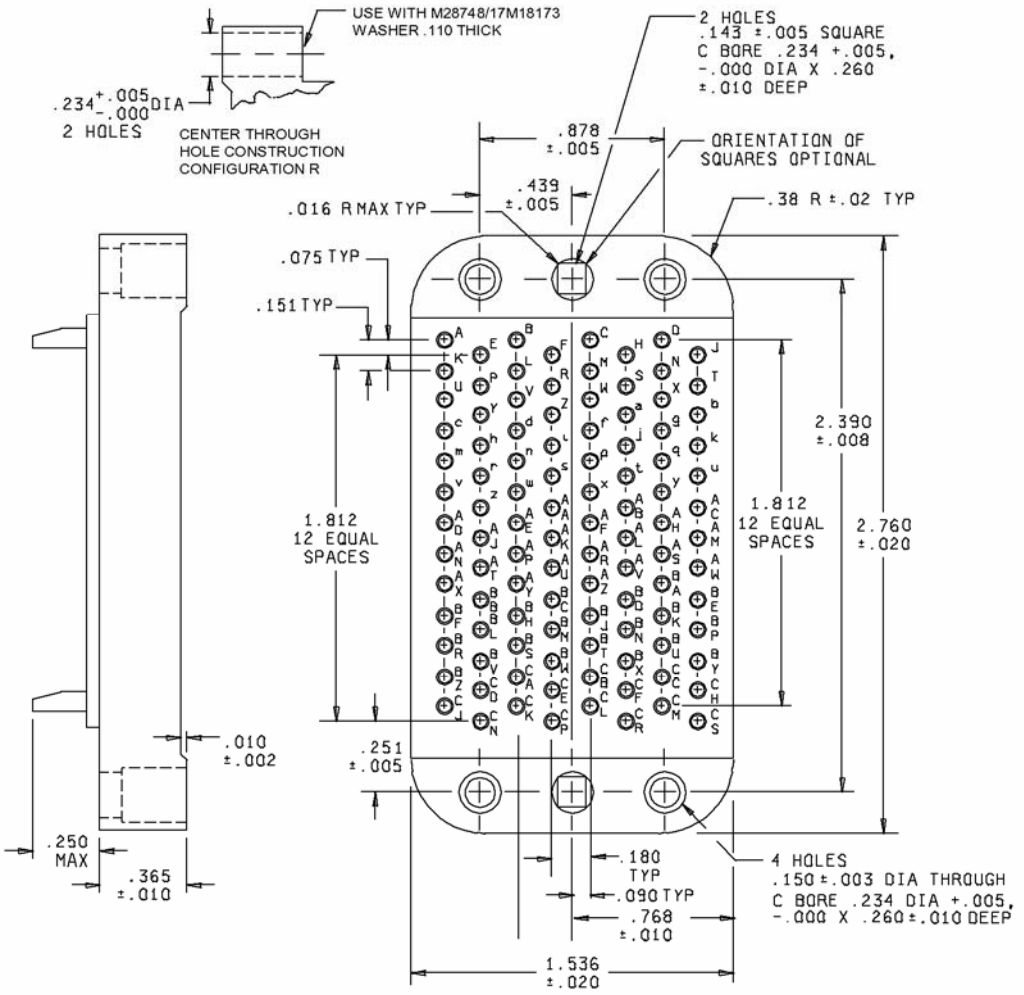

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.002	0.05	.062	1.57	.234	5.94	.439	11.15
.003	0.08	.075	1.91	.250	6.35	.768	19.51
.005	0.13	.110	2.79	.251	6.38	.878	22.30
.010	0.25	.143	3.63	.254	6.45	1.536	39.01
.016	0.41	.150	3.81	.260	6.60	1.812	46.02
.02	0.5	.151	3.84	.365	9.27	2.390	60.71
.020	0.51	.180	4.57	.38	9.7	2.760	70.10

Configuration K - Suitable for all applications, except one-piece jackscrews.
Configuration R - For long jackscrews and shield only (through hole alternate construction).

Insert with 104 contacts

Insert designators J and Q

FIGURE 2. Insert arrangements - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 and 2.

Insert material: See MIL-DTL-28748.

Mating connector: See MIL-DTL-28748/3 and MIL-DTL-28748/5.

Hardware accessories: See MIL-DTL-28748/17.

Part or Identifying Number (PIN): As shown in the following example and table I: 1/ 2/

See table I for permissible PINs:

(See PIN codes)

M28748/6 –	A	1	H	L	1 A
Basic number of specification sheet	Insert designator	Shield and shield clamp location or retaining plate	Shell and polarization position	Jackscrews or guidepins	Contacts

PIN codes:

Insert designator	Number of contact positions
A	7
B	9
C	14
S	18
D	20
E	26
F	34
G	42
H	50
J	75
K	104
Insert designator through hole 6/	
M	34
N	42
P	50
Q	75
R	104

Shield and shield clamp location or retaining plate 3/

0 – No shield or retaining plate

Shield and shield clamp location
1 - top M24132
2 - side M24132
3 - top M24133
4 - side M24133
5 - top M18192
6-side M18192
A - top M18193
B-side M18193

Retaining plate
7 - M18198
8 - M18199
9 - M18200

Shell and polarization designators 4/

0 - No shell included

Plug
A - A of M8203
B - B of M18203
C - C of M18203
D - D of M18203
E - E of M18203
F - F of M18203
G - G of M18203
H - Unpolarized M18204

Receptacle
J - A of M18204
K - B of M18204
L -C of M18204
M - D of M18204
N - E of M18204
P - F of M18204
Q - G of M18204
R - Unpolarized M18203

Jackscrews or guidepins 5/

0 – No Jackscrews or guidepins.
F - Fixed jackscrews, M18196 (not used with shield).
G - Guidepins, M18197 (not used with shield).
L - Long jackscrews M18194
S - Short jackscrews M18195 (not used with shield).

Contacts: In accordance with MIL-DTL-28748.

1A - 100 percent size 20
1L - none included

Jack and guide location: The male jackscrew (turning or fixed) or guide socket shall be located by the A or 1 pin contact.

See footnotes on next page.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

1/ The number zero (0) is used to indicate which parts are not included.
2/ To order individual piece parts for the shield, retaining plate, shell, jackscrews and guide pins, use MIL-DTL-28748/17.
3/ Retaining plate and shells are not available for insert size A.
4/ Polarization positions are for location of plug and receptacle shell pins and slots. See M28748/17.
5/ Jackscrew designator L: Multi-piece jackscrews will be supplied with insert designators A through K. Long one-piece jackscrews will be supplied for insert designators M through R.
6/ Inserts M through R have through holes for use with long one-piece jackscrew designs only.
7/ Mold bodies and hardware from different manufacturers are not necessarily interchangeable.

TABLE I. Permissible PIN's (connector assembly).

<table>
<tr><td>Configuration</td><td colspan="5">Accessories</td></tr>
<tr><td>Receptacle</td><td>Insert</td><td>Shield/retaining plate</td><td>Shell</td><td>Jackscrews</td><td>Contacts</td></tr>
<tr><td rowspan="12">M28748/6-</td><td>A</td><td>0, 1, 2</td><td>0</td><td>0, F, G</td><td rowspan="25">1A, 1L,</td></tr>
<tr><td>B</td><td rowspan="2">0, 1, 2, 5, 6, 7</td><td rowspan="12">0, A thru H</td><td rowspan="12"></td></tr>
<tr><td>C</td></tr>
<tr><td>S</td><td>0, 1, 2</td></tr>
<tr><td>D</td><td rowspan="2">0, 1, 2, 5, 6, 7</td></tr>
<tr><td>E</td></tr>
<tr><td>F</td><td rowspan="4">0, 3, 4, 5, 6, 8</td></tr>
<tr><td>G</td></tr>
<tr><td>H</td></tr>
<tr><td>J</td></tr>
<tr><td>L</td><td>0, A, B, 9</td></tr>
<tr><td>Plug</td><td></td><td></td><td></td><td></td></tr>
<tr><td rowspan="13">M28748/6-</td><td>A</td><td>0, 1, 2</td><td>0</td><td rowspan="13">0, L, G, S</td></tr>
<tr><td>B</td><td rowspan="2">0, 1, 2, 5, 6, 7</td><td rowspan="13">0, J thru R</td></tr>
<tr><td>C</td></tr>
<tr><td>S</td><td>0, 1, 2</td></tr>
<tr><td>D</td><td rowspan="2">0, 1, 2, 5, 6, 7</td></tr>
<tr><td>E</td></tr>
<tr><td>F</td><td rowspan="4">0, 3, 4, 5, 6, 8</td></tr>
<tr><td>G</td></tr>
<tr><td>H</td></tr>
<tr><td>K</td></tr>
<tr><td>L</td><td>0, A, B, 9</td></tr>
<tr><td>M</td><td rowspan="4">0, 3, 4, 5, 6, 8</td></tr>
<tr><td>N</td></tr>
<tr><td>P</td></tr>
<tr><td>Q</td></tr>
<tr><td>R</td><td>0, A, B, 9</td><td>0</td></tr>
</table>

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

For superseded insert Military Standard sheet PIN's to M28748 PIN's see table II.

TABLE II. Supersession data (inserts).

MS PIN	M28748/6 PIN	Number of contact positions
MS24003-1	M28748/6-A0001L	7
MS18256-1	M28748/6-B0001L	9
MS24009-1	M28748/6-C0001L	14
MS24011-1	M28748/6-S0001L	18
MS24013-1	M28748/6-D0001L	20
MS24019-1	M28748/6-E0001L	26
MS24021-1	M28748/6-F0001L	34
MS18260-1	M28748/6-G0001L	42
MS24025-1	M28748/6-H0001L	50
MS18259-1	M28748/6-J0001L	75
MS18262-1	M28748/6-K0001L	104
MS24021-2	M28748/6-M0001L	34 1/
MS18260-2	M28748/6-N0001L	42 1/
MS24025-2	M28748/6-P0001L	50 1/
MS18259-2	M28748/6-Q0001L	75 1/
MS18262-2	M28748/6-R0001L	104 1/

1/ Insert through hole designator. Inserts -2 (M through S) have through holes for use with long one-piece jackscrew designs only.

Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Reference documents. In addition to MIL-DTL-28748, this document references the following:

MIL-DTL-28748/3
MIL-DTL-28748/5
MIL-DTL-28748/17

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4336-002)

Review activities:
Army - AT, MI
Navy - AS, SH
Air Force - 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T14:13Z
Check the source to verify that this is the current version before use.